

# STL333CL



Familie	Vaatwasser
Commerciële breedte	60 cm
Nishoogte	82 cm
Installatie	Volledig geïntegreerd
Deur paneel	Niet meegeleverd
Aantal korven	3, FlexiDuo
EAN-code	8017709307011



## Programs



Aantal programma's	10+1	Auto sensor 45-65	Ja
Wastemperatuur	38, 45, 50, 55, 65, 70, 75 °C	Mix	Ja
Weken	Ja	Stil (-2dB)	Ja
Snel 27'	Ja	Intensief	Ja
Krystal	Ja	Zelf reinigen	Ja
Snel - Volledig 60'	Ja	Hygiëne 99,9%	Ja
Eco	Ja		

## Opties



Dry Assist + opties	Ja	Intensive Wash optie	
Delay timer optie	Tot 24 uur, i.c.m. automatisch spoelen	Optie speciale programma's	Ja
FlexiZone ½ (halve beladingsmogelijkheid)	Ja		

## Korven



Kleur korven	Grijs	Bovenmand met EasyGlide System:	Ja
Kleur korfcomponenten	Grijs		

<b>Handgreep</b>	Van kunststof met roestvrijstalen inzet op boven- en onderrek	<b>Maximum afmetingen bord dat in bovenste korf kan worden geladen</b>	19,0 cm
<b>Bovenkorf</b>	Met 1 opvouwbaar rek	<b>Onderkorf</b>	2 inklapbare rekken
<b>Glazen houder</b>	Ja	<b>Onderkorf met anti-drup inserts</b>	Ja
<b>In hoogte verstelbare bovenkorf</b>	3 niveaus	<b>Maximum afmetingen bord dat in onderste korf kan worden geladen</b>	30,0 cm
		<b>Kleur binnenonderdelen</b>	Blauw

## Technische specificaties

	    		
<b>Breedte product</b>	598 mm	<b>Watertoevoer</b>	Enkel; koud en warm water tot 60°C - energiebesparing tot 35%
<b>Diepte product</b>	545 mm	<b>Maximale waterhardheid</b>	100°fH;58°dH
<b>Type display</b>	3 cijfers	<b>Droogssysteem</b>	Natuurlijk condensor drogen met Dry Assist + automatische deuropeningssysteem aan het einde van de cyclus
<b>Hoogte product</b>	818 mm	<b>Stoombeveiliging</b>	Van kunststof
<b>Bediening</b>	Elektronisch	<b>Materiaal kuip</b>	Roestvrij staal
<b>Display</b>	Instelling Delay timer, Programma duur indicator	<b>Filter</b>	Roestvrij staal
<b>Grafische weergave programma's</b>	Symbolen	<b>Verborgen verwarmingselement</b>	Ja
<b>Aan/uit indicator</b>	Ja	<b>Scharnieren</b>	Self balancing, Sliding, FLEXIFIT
<b>Zout indicator</b>	Indicator (lampje)	<b>Min. en max. frontaal paneelgewicht</b>	2,5 - 11 kg
<b>Glansspoelmiddel indicator</b>	Indicator (lampje)	<b>Min. en max plinthoogte</b>	50 - 215 mm
<b>Indicator einde cyclus</b>	ActiveLight	<b>Verstelbare voetjes</b>	7 cm, van 820 tot 890 mm
<b>Wassysteem</b>	Planetarium	<b>Extra pakkingen</b>	Ja, met roestvrijstalen plaat
<b>Derde sproeiarm</b>	Enkel	<b>Back cover</b>	Ja
<b>Waterontkalker</b>	Elektronisch instelbaar	<b>Diepte vaatwasser met open deur (mm)</b>	1146
<b>Aquatest sensor</b>	Ja	<b>Voetjes achterzijde vanaf de voorwand regelbaar</b>	Ja
<b>Overstroombeveiliging</b>	Total Acquastop	<b>Bovenbedekking</b>	Van kunststof

## Performance / Energy Label - Reg. 2019

  	<b>Energie-efficiëntieklaasse C (wascyclus)</b>
--	---

<b>Programmaduur</b>	4:25 h:min
<b>Geluidsniveau</b>	43 dB(A) re 1 pW

**Energy consumption** 73 KWh  
[per 100 cycles, based  
on the eco programme]

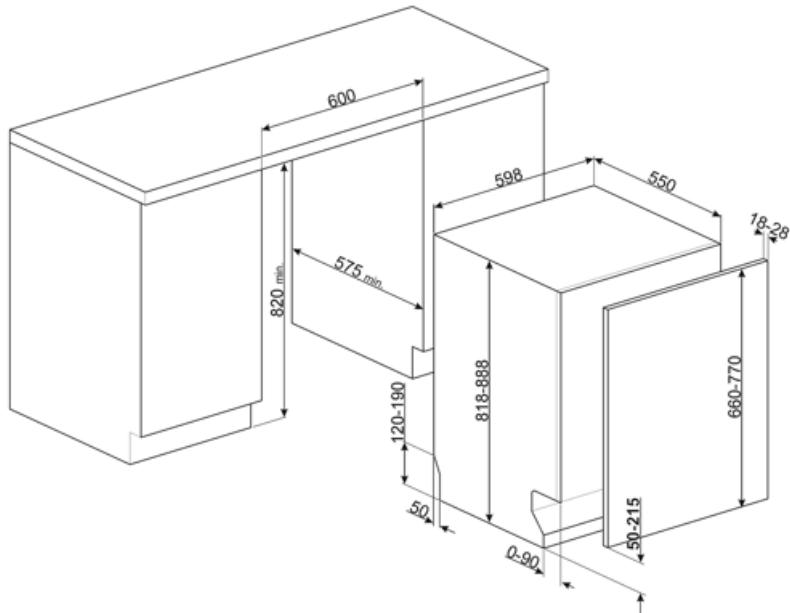
**Akoestisch  
geluidsemissieklaasse** B  
**Energy efficiency Index  
(EEI)** 43,8

**Nominale capaciteit (ps)** 13  
**Water verbruik (per  
cyclus)** 9,0 litres


## Elektrische aansluiting

**Stekker** (F;E) Schuko  
**Aansluitwaarde** 1800 W  
**Stroom** 10 A  
**Spanning** 220-240 V


**Frequentie** 50 Hz  
**Type aansluiting** Single-phase  
**Lengte voedingskabel** 140 cm



## Compatibele Accessoires

**KIT82CN****KIT82SPRAN****KIT82SPRX****KITGH**

Kit glazen houder. Deze moet op de eerste mand worden gemonteerd, maar alleen als er inklapbare rekken zijn

**KITPL60N**

Toekick Kit in zwarte kleur met verstelbare hoogte en diepte. Kan worden geïnstalleerd over alle volledig geïntegreerde modellen en onderbouw modellen met variabel draaipunt of flexifit-scharnieren.

**KITPLV2**

Kit verlengstuk voor vaatwasser en wasmachine: lengte 2 mtr.

**KIT82CX****KIT82SPRMW****KITFLEXI**

Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

**KITPL60B**

Toekick Kit in witte kleur met verstelbare hoogte en diepte. Kan worden geïnstalleerd over alle volledig geïntegreerde modellen en modellen onderbouw met variabel draaipunt of flexifit-scharnieren.

**KITPL60X**

Toekick Kit in roestvrij staal met verstelbare hoogte en diepte. Kan worden gemonteerd over alle volledig geïntegreerde modellen en onderbouw modellen met variabel draaipunt of flexifit-scharnieren.

## Symbols glossary

	Activelight is een led die een rode stip projecteert op de vloer onder de vaatwasser als het apparaat in gebruik is		Aquatest meet de helderheid van het water tijdens een automatisch programma en zorgt automatisch voor een minimaal verbruik van water en energie
	To improve the drying of dishes without leaving stains.		82 cm high
	Vertragingstimer: De uitgestelde timer kan de start van het programma tot 24 uur uitstellen.		EasyGlide: handig EasyGlide-systeem voor eenvoudig uitladen van het apparaat en dat maximale flexibiliteit van het laden van de machine mogelijk maakt
	FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.		The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.
	FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.		The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.
	Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.		Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.
	Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.		Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.
	Soak programme: The soak programme provides a rinse to prevent dirt from drying.		Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.
	Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria.		13 place settings: Number of place settings.
	Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.		System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



Energy efficiency class C



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



---

## Benefit (TT)

---

### Active Light

Maximum control thanks to the light projected on the floor that indicates when the dishwasher is running and when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

### FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

### Planetarium Wash System

Full and deep wash coverage thanks to the advanced movement of the spray arm, an innovation patented by Smeg

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.

### Flexifit hinge system

Smooth-running door for optimal integration into the kitchen design

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet.

Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.

### DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying