STL362DQ

Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
Kitchen panel	Not supplied
N° baskets	3, Flexi
Motor	Inverter 2.0
EAN code	8017709337353



Programs

N. of programmes	7+1	**Mix**	
Washing temperatures	50, 60 °C	**Self clean**	Yes
Soak	Yes	**Intense 60°**	Yes
Full express - 60 minutes	Yes	**Mix 60°**	Yes
Express 50°	Yes	**Auto 50°-60°**	Yes
ECO	Yes		

Options

Delay timer option	Up to 24 hours	**Crystal option**	Yes
Extreme option	Yes		

Baskets


Basket colour	Grey	**Largest loadable dish in upper basket**	19,0 cm
Basket components colour	Grey	**Lower Basket**	With 2 foldable racks
Handle	In plastic on upper and lower basket	**Largest loadable dish in lower basket**	31.0 cm
Upper Basket	With 1 foldable rack	**Colour Inner Components**	Blue
Height adjustment of the upper basket	On two levels (4 cm)		

Technical Features



Width (mm)	596 mm
Depth (mm)	550 mm
Display type	LED display (3 digit)
Product Height (mm)	818 mm
Controls	Electronic
Display	Delayed start, Programme time indicator, Time to end indication
Programme graphics	Symbols
On/off indicator	Yes
Salt light indicator	Light
Rinse aid indicator	Light
End of cycle indicator	On display, with acoustic signal
Washing system	Standard
Third spray arm	Single
Water softener	With electronic setting
Turbidity sensor Aquatest	Yes
Flood protection system	Total Acquastop
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Max water hardness	90°fH; 50°dH
Drying system	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Steam protection	In plastic
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing, Sliding, FLEXIFIT
Min. and max. frontal panel weight	2,5 - 10 kg
Min. and max plinth height	40 - 175 mm
Adjustable feet	8 cm, from 820 to 900 mm
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1230 mm
Back feet adjustable from front	Yes


Performance / Energy Label - Reg. 2019



Energy Efficiency Class	D
Energy consumption [per 100 cycles, based on the eco programme]	85 kWh
Rated capacity (ps)	14
Water consumption [per cycle]	10,5 litres
Programme duration	4:00 h:min
Airborne acoustical noise emissions	46 dB(A) re 1 pW
Airborne acoustical noise emission class	C
Energy efficiency Index (EEI)	49,9

Electrical Connection

Connected power	1800 W
Current	10 A
Voltage	220-240 V
Frequency (Hz)	50 Hz
Type of connection	Single-phase
Power supply cable length	140 cm
Plug	(F;E) Schuko

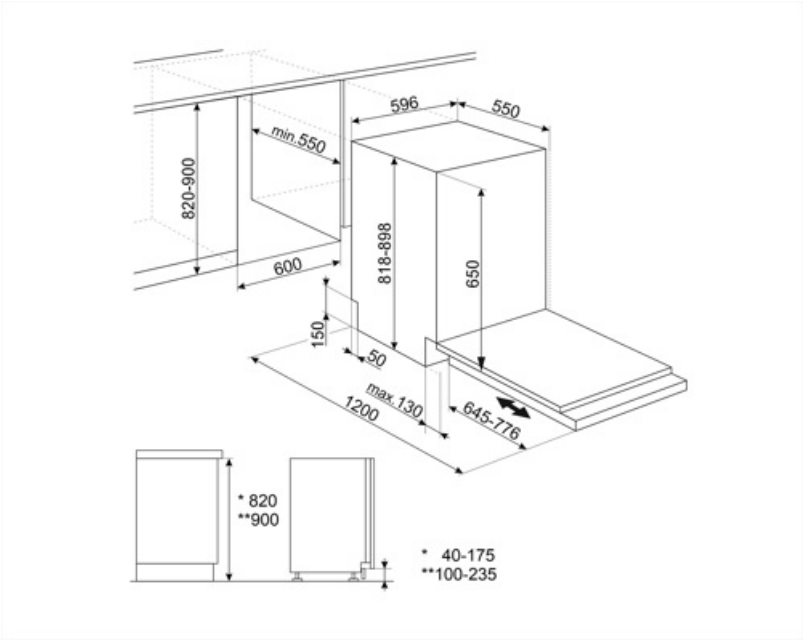
596
550
min.550
820-900
818-898
650
600
150
50
max.130
1200
645-776
* 820
**900
* 40-175
**100-235

Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Energy efficiency class D



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.







This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



A quick programme suitable for washing a load with fresh and light soil.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Programme suitable for washing and drying normally soiled items.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



14 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.