

STL5322AQL







Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, FlexiDuo Motor Inverter 2.0 EAN code 8017709357030



Yes

Programs























N. of programmes 10 + 1Washing temperatures Soak Express 27' Yes Crystal Yes Full express - 60 Yes minutes **ECO** Yes

Green express

38, 45, 50, 55, 65, 70, 75 °C

Auto sensor 45-65

Yes Quiet (-2 dB) Yes Intense Yes Self clean Yes Hygiene 99,9% Yes

Delicate Trays

Options









Dry Assist+ option Delay timer option

1/2 load FlexiZone

option

Yes

Up to 24 hours

Yes

Intensive wash zone

option

Special programs option Yes

Baskets



Basket colour Grey **Basket components** Grey colour

Lower Basket Lower basket accessories

With 4 foldable racks MultiLoad, ProFlex Holder,

WinePro

SMEG SPA 30/11/2025



Handle In plastic with stainless

steel insert on upper and

lower basket

Upper Basket Height adjustment of the upper basket

With 3 foldable racks On three levels (5 cm)

Largest loadable dish in 19,0 cm

upper basket

Lower basket with anti- Yes

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Components Sage Leaf

Technical Features















Width (mm) Depth (mm) Display type

598 mm 545 mm

LED display (3 digit)

Product Height (mm)

818 mm Controls Electronic touch control Display

Delayed start, Programme time indicator, Time to end

indication

Programme graphics On/off indicator Salt light indicator Rinse aid indicator End of cycle indicator

Symbols Yes Liaht Light ActiveLight Planetarium

Washing system Third spray arm

Single Water softener With electronic setting

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max.

60°C - energysave with hot

water up to 35%

Max water hardness 100°fH;58°dH Drying system Natural condenser drying,

door opening system at the end of the cycle Steam protection In plastic

Tub material Stainless steel Filter Stainless steel Yes

Concealed heating element Hinges

FLEXIFIT 2,5 - 11 kg

Min. and max. frontal panel weight

Min. and max plinth

height Can be installed in-

column

Adjustable feet Additional gaskets

Back cover Depth of dishwasher with open door (mm)

Back feet adjustable

Programme duration

Airborne acoustical

noise emissions

from front

Top cover

7 cm, from 820 to 890 mm Yes, with stainless steel

Self balancing, Sliding,

with Dry Assist + automatic

plate

50 - 215 mm

Yes, with siphon

1146 mm

Yes

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class

Energy consumption [per 100 cycles, based on the eco programme]

54 kWh

Rated capacity (ps)

Water consumption [per 10,5 litres

14

Airborne acoustical noise emission class **Energy efficiency Index**

(EEI)

4:35 h:min

42 dB(A) re 1 pW

В

31.8

cycle]

SMEG SPA

30/11/2025




Electrical Connection

Connected power 1800 W Current 10 A Voltage 220-240 V Frequency (Hz) 50 Hz

Type of connection Power supply cable length Plug

Single-phase 140 cm

(F;E) Schuko

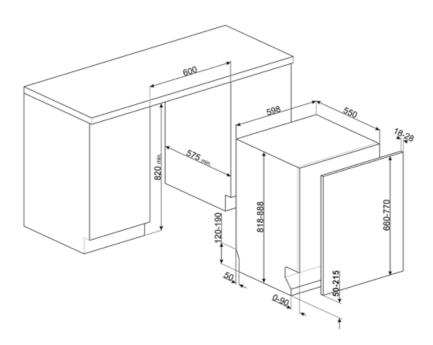

SMEG SPA 30/11/2025



Compatible Accessories



KIT82CN



KIT82CX



KIT82SPRAN



KIT82SPRMW



KIT82SPRX



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)




KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

KITFLEXI





KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.





Kit extension for dishwasher and washing machine: lenght mt. 2

SMEG SPA 30/11/2025



Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



Installation in column: Installation in column.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



14 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.

SMEG SPA 30/11/2025





Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Energy efficiency class A



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



SMEG SPA 30/11/2025