

STL7332C





Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, Flexi Inverter 2.0 Motor EAN code 8017709357368



Programs

























N. of programmes 10 + 1Auto sensor 45-65 Yes Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Yes Quiet (-2 dB) Yes Express 27' Yes Intense Yes Full express - 60 Yes Self clean Yes minutes Hygiene 99,9% Yes **ECO** Yes Delicate Yes

Options









Dry Assist+ option **Delay timer option**

Yes

Up to 24 hours

1/2 load FlexiZone option

Yes

With 2 foldable racks

Special programs option Yes

Baskets



Basket colour **Basket components**

colour

Handle

Upper Basket

Grey Grey

In plastic on upper and

lower basket

With 1 foldable rack

Lower Basket Lower basket

MultiLoad accessories

Lower basket with anti- Yes

drip inserts



Height adjustment of the upper basket

On three levels (5 cm)

Largest loadable dish in 30,0 cm

lower basket

Sage Leaf

Largest loadable dish in 19,0 cm upper basket

Colour Inner Components

Technical Features









Width (mm) 598 mm Depth (mm) 545 mm

Display type LED display (3 digit)

Product Height (mm) 818 mm Controls Electronic

Display Delayed start, Programme

time indicator

Programme graphics Symbols Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal

Washing system Orbital Third spray arm Sinale

With electronic setting Water softener

Yes

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply Single; cold/hot water max.

60°C - energysave with hot

water up to 35%

Max water hardness 100°fH;58°dH

Drying system Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic Tub material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing, Sliding,

FLEXIFIT

2,5 - 11 kg

50 - 215 mm

7cm, from 820 to 890 mm

Yes

Yes

Yes

1168

Min. and max. frontal

panel weight

Min. and max plinth

height

Adjustable feet **Back cover**

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

In plastic Top cover

Performance / Energy Label - Reg. 2019



cycle]







Energy Efficiency Class Energy consumption

73 KWh

[per 100 cycles, based on the eco programme] Rated capacity (ps)

13

Water consumption [per 9,0 litres

Programme duration Airborne acoustical

noise emissions Airborne acoustical

noise emission class

Energy efficiency Index (EEI)

43.8

В

4:25 h:min

43 dB(A) re 1 pW


Electrical Connection

Plug (F;E) Schuko Connected power 1800 W

Frequency (Hz) Type of connection 50 Hz

Single-phase



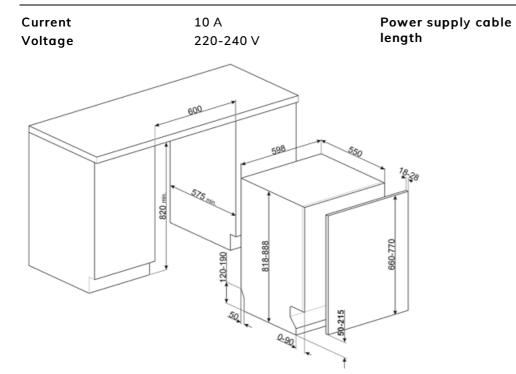

140 cm



Compatible Accessories



KIT82CN



KIT82CX



KIT82SPRAN



KIT82SPRMW



KIT82SPRX



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg

(max 15 kg 82 cm and 13,5 kg 86 cm)




KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

KITFLEXI






KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X







Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Energy efficiency class C



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.





Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Benefit (TT)

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.

Flexifit hinge system

Smooth-running door for optimal integration into the kitchen deisgn

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying