

STP364T







Product Family Dishwashers
Commercial width 60 cm
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied
N° baskets 3, FlexiDuo
Motor Inverter

EAN code 8017709182427



Programs



Soak

Glass

ECO



N. of programmes



Washing temperatures





5+4 quick programmes
45, 50, 55, 65, 70 °C
Yes
Yes
Yes
Ultra Rapid
Mix Express
Auto 60
Universal
Yes
Intensive 70°

Ultraclean Yes

Options









Enersave option
Delay timer option

1/2 load FlexiZone Y

option

Yes

Up to 24 hours

Yes

Options for tabs

FlexiTabs

Professional option

Yes

Yes

Yes

Yes

Yes

Yes

Yes

Baskets





Basket colour

Upper Basket

Basket components

colour

Handle

--

Grey

In plastic on upper and

lower basket

Stainless Steel

With foldable central racks

and glass holder

Largest loadable dish in 18,0 cm

upper basket

Lower Basket With completely foldable

racks and glass holder

Lower basket with anti- Yes

drip inserts



Height adjustment of the upper basket Upper basket with EasyGlide System

On three levels (5 cm)

Yes

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Grey anti drop inserts, Grey handles, Grey pastic plate

Components

for regulation second basket on three levels, Grey

Flexiduo, Green Orbital

13 place settings sliding **Cutlery basket**

Technical Features







Width (mm) 598 mm Depth (mm) 545 mm

Display type LED display (3 digit)

Product Height (mm) 818 mm Controls Electronic

Delayed start, Programme Display time indicator, Time to end

indication

Programme graphics Symbols On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal

Washing system Orbital Third spray arm Single

Water softener With electronic setting

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness 100°fH:58°dH

Drying system

Natural condenser drying, with EnerSave automatic door opening system at the

end of the cycle

Steam protection In plastic **Tub** material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing with variable

Yes

hinges 2 - 9 kg

Min. and max. frontal

panel weight

Min. and max plinth

height

100 - 228 mm

Adjustable feet 7cm, from 820 to 890 mm Insulation level Top Back cover Yes

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

1146

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class Ε **Energy consumption** 92 KWh

[per 100 cycles, based on the eco programme]

Rated capacity (ps) 14

Water consumption [per 10.5 litres

cycle]

Airborne acoustical noise emissions Airborne acoustical

noise emission class

Energy efficiency Index

(EEI)

45 dB(A) re 1 pW

C

54.1




Electrical Connection

Plug Not present
Connected power 5450 W
Current 16 A
Voltage 400-415 V

Frequency (Hz)
Type of connection
Power supply cable
length

50 Hz Three-phase 200 cm

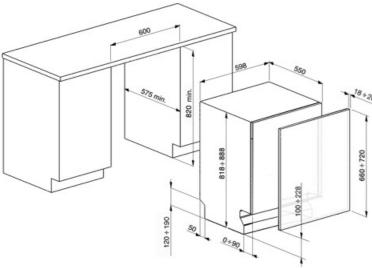



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable



KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.




KITPL60X

KITPL60B

Toekick Kit in White colour with

be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

adjustable height and deepness. Can



KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.





82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.



Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



Ideal for multi-function detergents, this option allows washing to be optimised, with full benefits from the combined-action tablets. When this option is activated, any salt and rinse aid is used.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Auto 60°: Program Auto 60° is designed for heavily soiled mixed dishes.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultra Rapid: The program is specifically for Ultra Fast wash very quickly (16 min.). Pots and pans very dirty, even with dried residues.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



UniversaleProf: The Universal program is suitable for washing normally soiled tableware, even with little residue dried.



Professional: Option Professional enables to convert household appliances into semiprofessional ones due to the programs which significantly reduce washing time to obtain an astonishing 16 minutes cycle.





14 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Energy efficiency class E



Benefit (TT)

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.