

STU1822



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 2 |
| Motor | Inverter |
| EAN code | 8017709344177 |
| UPC Code | 812895026429 |



Programs



| | | | |
|----------------------|-------------------|---------------|-----|
| N. of programmes | 6 | Super | Yes |
| Washing temperatures | 45, 50, 55, 65 °F | Regular | Yes |
| Delicate | Yes | Intensive 65° | Yes |
| Auto | Yes | Rinse | Yes |

Options



| | | | |
|------------|-----|---------------------------|----------------|
| Hi-Temp | Yes | Delay timer option | Up to 24 hours |
| Extra Fast | Yes | Extra dry option | Yes |
| Sanitize | Si | 1/2 load FlexiZone option | Yes |
| Silent | Si | | |

Baskets

| | | | |
|--------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour | Grey | Height adjustment of the upper basket | On two levels (5cm) |
| Basket components colour | Grey | Lower Basket | With 2 foldable racks |
| Handle | In plastic on upper and lower basket | Colour Inner Components | Grey |
| Upper Basket | With 2 foldable racks | Cutlery basket | Yes |


Technical Features



| | | | |
|-------------------------------|---|--|--------------------------|
| Width (mm) | 17 5/8 " | Washing system | Standard |
| Depth (mm) | 21 5/8 " | Turbidity sensor | Yes |
| Display type | LED display (3 digit) | Aquatest | |
| Product Height (mm) | 32 5/16 " | Drying system | Natural condenser drying |
| Controls | Electronic | Tube material | Stainless steel |
| Display | Delayed start, Programme time indicator | Filter | Stainless steel |
| Programme graphics | Written in EN | Concealed heating element | Yes |
| On/off indicator | Yes | Adjustable feet | 5cm, from 820 to 870 mm |
| Rinse aid indicator | Light | Back feet adjustable from front | Yes |
| End of cycle indicator | On display, with acoustic signal | Energy Star | |

Electrical Connection

| | | | |
|------------------------|--------|----------------------------------|----------------|
| Connected power | 1400 W | Type of connection | Single-phase |
| Current | 12 A | Power supply cable length | 116 " |
| Voltage | 120 V | Plug | (B) NEMA 5-15P |
| Frequency (Hz) | 60 Hz | | |

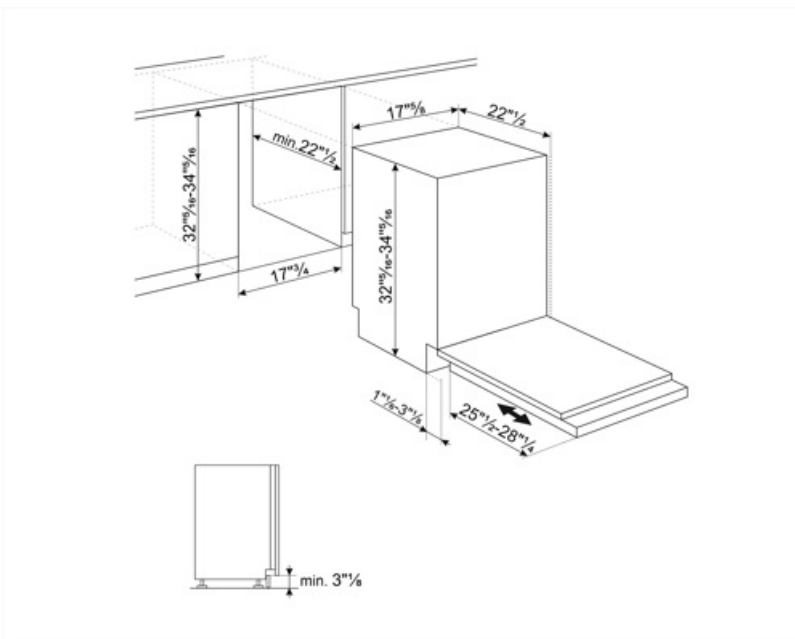

Compatible Accessories

KIT18SPRX



KITPL60B


Toe kick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60N



Toe kick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X















Toe kick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary

| | | | |
|--|--|---|--|
|  | The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water. |  | 82 cm high |
|  | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time. |  | FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |
|  | Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |
|  | PRG_RINSE_72dpi |  | PRG_STRONG_72dpi |
|  | EXTRA DRY This option adds a hot rinse cycle that ensures improved drying. |  | The Regular programme is for dishes with regular dirt, even with dried-on residues. |