

STU1822



Product Family	Dishwashers
Commercial width	45 cm
Commercial height	82 cm
Kitchen panel	Not supplied
N° baskets	2
Motor	Inverter
EAN code	8017709344177



Programs



N. of programmes	6	Regular	Yes
Washing temperatures	45, 50, 55, 65 °F	Intensive 65°	Yes
Auto	Yes	Rinse	Yes

Options



Delay timer option	Up to 24 hours	Extra dry option	Yes
--------------------	----------------	------------------	-----

Baskets

Basket colour	Grey	Height adjustment of the upper basket	On two levels (5cm)
Basket components colour	Grey	Lower Basket	With 2 foldable racks
Handle	In plastic on upper and lower basket	Colour Inner Components	Grey
Upper Basket	With 2 foldable racks	Cutlery basket	Yes

Technical Features




Width (mm)	17 5/8 "	End of cycle indicator	On display, with acoustic signal
Depth (mm)	21 5/8 "	Washing system	Standard

Display type	LED display (3 digit)	Turbidity sensor	Yes
Product Height (mm)	32 5/16 "	Aquatest	
Controls	Electronic	Tube material	Stainless steel
Display	Delayed start, Programme time indicator	Filter	Stainless steel
Programme graphics	Written in EN	Concealed heating element	Yes
On/off indicator	Yes	Adjustable feet	5cm, from 820 to 870 mm
Rinse aid indicator	Light	Back feet adjustable from front	Yes

Electrical Connection

Plug	(B) USA 120V	Frequency (Hz)	60 Hz
Connected power	1400 W	Type of connection	Single-phase
Current	12 A	Power supply cable length	116 "
Voltage	120 V		

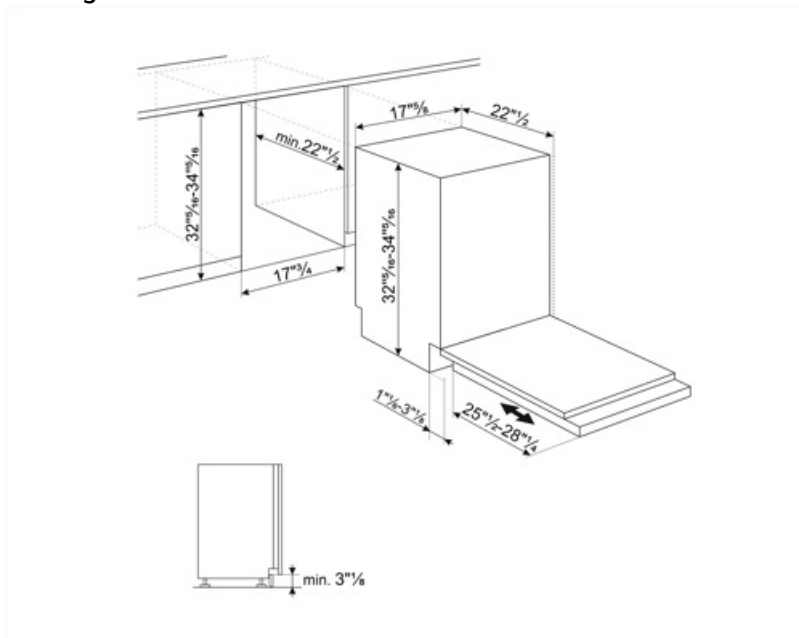

Compatible Accessories



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N









Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary

	The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.		82 cm high
	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.		Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.
	EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	PRG_RINSE_72dpi		The Regular programme is for dishes with regular dirt, even with dried-on residues.