

STU1822



Product family	Dishwashers
Commercial height	82 cm
Installation	Fully-Integrated
Kitchen panel	Not supplied
Nº baskets	2
Engine	Inverter
EAN code	8017709344177
UPC Code	812895026429



Programs



Number of programs	6	Super	Yes
Washing temperatures	45, 50, 55, 65 °F	Regular	Yes
Delicates	Yes	Intensive 150°F	Yes
Auto	Yes	Rinse	Yes

Options



Hi-Temp	Yes	Delay start	Up to 24 hours
Extra Fast	Yes	Extra-dry option	Yes
Sanitize	Si	FlexiZone half-load option	Yes
Silent	Si		

Baskets

Basket color	Gray	Upper basket height adjustment	On two levels (5cm)
Basket components finish	Gray	Lower basket	With 2 foldable racks
Handle	In plastic on upper and lower basket	Colour Inner Components	Gray
Upper basket	With 2 foldable racks	Cutlery basket	Yes


Technical Features



Width	17 5/8 "	End-of-cycle indicator	On display, with acoustic signal
Depth	21 5/8 "	Washing system	Standard
Display type	LED display (3 digits)	Turbidity sensor	Yes
Height	32 5/16 "	Aquatest	
Controls	Electronic	Drying system	Natural condensation drying
Display	Delay start, Program progress indicator	Tub material	Stainless steel
Program symbols	Writings in English	Filter	Stainless steel
On/off indicator	Yes	Concealed heating element	Yes
Rinse aid indicator	Light	Adjustable feet	2", from 32 1/4" to 34 1/4"
		Back feet adjustable from front	Yes

Electrical Connection

Connected power	1400 W	Connection type	Single-phase
Current	12 A	Power supply cable length	116 "
Voltage	120 V	Plug	(B) NEMA 5-15P
Frequency (Hz)	60 Hz		

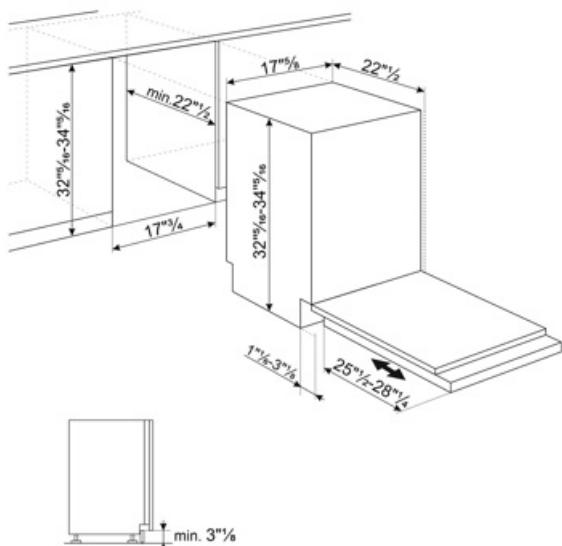

Compatible Accessories

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Inverter technology: The evolution of Smeg's dryers towards more intelligent and environmentally sustainable models has led to the choice of using Inverter technology with heat pumps, which reduces significantly energy consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



PRG_RINSE_72dpi



PRG_STRONG_72dpi



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



The Regular programme is for dishes with regular dirt, even with dried-on residues.