

STU1822





Product family Dishwashers

Width 18"
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied

N° baskets 2
Engine Inverter

EAN code 8017709344177



Programs











Number of programs6SuperYesWashing temperatures45, 50, 55, 65 °FRegularYesDelicatesYesIntensive 150 °FYesAutoYesRinseYes

Options







Hi-Temp Yes Delay start Up to 24 hours
Extra Fast Yes Extra-dry option Yes

Extra FastYesExtra-dry optionYesSanitizeSìFlexiZone half-loadYesSilentSìoption

Baskets

Basket color Gray Upper basket height On two levels (5cm)
Basket components Gray adjustment

finish Lower basket With 2 foldable racks

Handle In plastic on upper and Colour Inner Gray lower basket Components

Upper basketWith 2 foldable racksCutlery basketYes

Technical Features





 Width
 17 5/8 "

 Depth
 21 5/8 "

Display type LED display (3 digits)

Height 32 5/16 "
Controls Electronic

DisplayDelay start, Program progress indicator

Program symbols Writings in English
On/off indicator Yes
Rinse aid indicator Light

End-of-cycle indicator On display, with acoustic

signal

Washing system Standard
Turbidity sensor Yes

Aquatest
Drying system

Drying system Natural condensation

drying

Tub materialStainless steelFilterStainless steel

Concealed heating

element

Adjustable feet

Back feet adjustable

from front

2", from 32 1/4" to 34 1/4"

Yes

Yes

Electrical Connection


Plug (B) NEMA 5-15P
Connected power 1400 W
Current 12 A

Current 12 A Voltage 120 V Frequency (Hz)
Connection type
Power supply cable
length

60 Hz

Single-phase

116 "

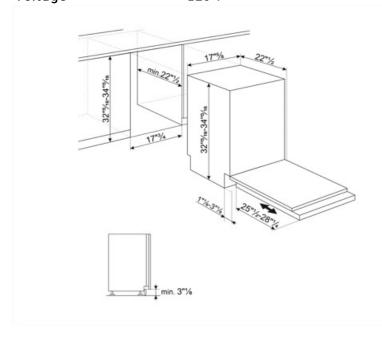



Compatible Accessories

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Inverter technology: The evolution of Smeg's driers towards more intelligent and environmentally sustainable models has led to the choice of using Inverter technology with heat pumps, which reduces significantly energy consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



PRG_RINSE_72dpi



PRG_STRONG_72dpi



•••



...