

STU2FABCR2





Product Family Dishwashers
Commercial height 82 cm

Installation Under counter built-in

N° baskets3, FlexiDuoMotorSingle phaseEAN code8017709303624



Programs













N. of programmes 10 Delicate Yes Washing temperatures 38, 45, 50, 55, 65, 70, 75 °F Auto Yes Soak Crystal & China Yes Express 27' Yes Eco express Yes Mix Yes Express 60' Yes Sterilise Yes Pots & Pans Yes

Options









Dry Assist option
Delay timer option
1/2 load FlexiZone

Yes Up to 9 hours

Yes

Professional option Intensive wash zone option

Special programs option Yes

Baskets

option



Basket components

colour

Upper Basket With 1 foldable rack

Glass holder

Height adjustment of the upper basket

Grey

Yes

On three levels (5 cm)

upper b

Largest loadable dish in 23,5 inches

upper basket

Lower Basket With 2 foldable racks

Largest loadable dish in 30,0 inches

lower basket

Cutlery basket Yes



Sliding Guides Extra Glide

Yes

Technical Features







Width (mm) Depth (mm) 21 7/16 "

Display type LED display (1 digit)

Product Height (mm) 32 3/16 " Display Delayed start Programme graphics **Symbols** On/off indicator Yes

Salt light indicator Rinse aid indicator

Acoustic signal End of cycle indicator Washing system Planetarium Third spray arm

Water softener

Turbidity sensor

Aquatest

23 9/16 "

Light Light

Single

With electronic setting

Yes

Flood protection system Total Acquastop 100°fH;58°dH Max water hardness

Natural condenser drying, Drying system

with Dry Assist automatic door opening system at the

end of the cycle Stainless steel

98 - 168 mm

Tub material Filter Stainless steel

Concealed heating Yes

element

Hinges Self balancing with fixed

hinges

Min. and max plinth

height

7cm, from 820 to 890 mm Adjustable feet

Additional gaskets Yes Yes Back cover Depth of dishwasher

with open door (mm)

Top cover

1146 mm

Metallic sheet

Electrical Connection

Connected power 1800 W Current 13 A Voltage 115 V Frequency (Hz) 60 Hz


Type of connection Power supply cable

length Plug

Single-phase 140 "

(A) USA e Messico



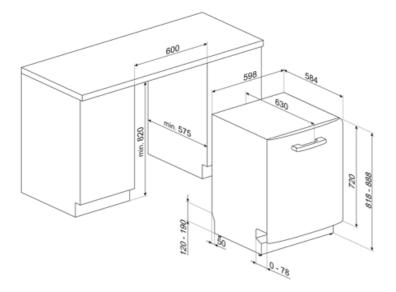



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Alternative products



STU2FABRD2

Colour: Red



STU2FABWH2

Colour: White



STU2FABBL2

Colour: Black



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



The Dry Assist option ensures optimal drying of the dishes by automatically opening the door at the end of the wash cycle. Reducing the rinse temperat



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.