

STU2FABWH2



| | |
|-------------------|---------------|
| Product family | Dishwashers |
| Commercial height | 82 cm |
| Installation | Under-Counter |
| N° baskets | 3, FlexiDuo |
| Motor | Single phase |
| EAN code | 8017709303617 |



Programs



| | | | |
|----------------------|-------------------------------|-----------------|-----|
| Number of programs | 10 | Delicates | Yes |
| Washing temperatures | 38, 45, 50, 55, 65, 70, 75 °F | Auto | Yes |
| Soak | Yes | Crystal & China | Yes |
| Express | Yes | Eco express | Yes |
| Mix | Yes | Express 60' | Yes |
| Sterilize | Yes | Pots & Pans | Yes |

Options



| | | | |
|-------------------|---------------|----------------------------|-----|
| Dry Assist option | Yes | FlexiZone half-load option | Yes |
| Delay start | Up to 9 hours | Special programs option | Yes |

Baskets



| | | | |
|--------------------------------|-----------------|---------------------------------------|-----------------------|
| Basket components finish | Gray | Largest loadable dish in upper basket | 23,5 inches |
| Upper basket | 1 foldable rack | Lower basket | With 2 foldable racks |
| Glass holder | Yes | Largest loadable dish in lower basket | 30,0 inches |
| Upper basket height adjustment | On 3 levels | Cutlery basket | Yes |

Sliding Guides Extra Yes
Glide

Technical Features




| | |
|------------------------|-------------------------|
| Width | 23 9/16 " |
| Depth | 21 7/16 " |
| Display type | LED display (1 digit) |
| Height | 32 3/16 " |
| Display | Delay start |
| Program symbols | Symbols |
| On/off indicator | Yes |
| Salt indicator | Light |
| Rinse aid indicator | Light |
| End-of-cycle indicator | Acoustic signal |
| Washing system | Planetarium |
| Third spray arm | Single |
| Water softener | With electronic setting |
| Turbidity sensor | Yes |
| Aquatest | |

| | |
|---|----------------------------------|
| Flood protection system | Total Aquastop |
| Max water hardness | 100°FH;58°dH |
| Drying system | Dry Assist |
| Tube material | Stainless steel |
| Filter | Stainless steel |
| Concealed heating element | Yes |
| Hinges | Self-balancing with fixed hinges |
| Min. and max plinth height | 3.9" - 6.6" |
| Adjustable feet | 2 3/4", from 32 1/4" to 35" |
| Additional gaskets | Yes |
| Back cover | Yes |
| Depth of dishwasher with open door (mm) | 1146 mm |
| Top cover | Metal sheet |
| Energy Star | Yes |


Electrical Connection

| | | | |
|-----------------|--------|-------------------|------------------|
| Connected power | 1800 W | Connection type | Single-phase |
| Current | 13 A | Power Cord Length | 140 " |
| Voltage | 115 V | Plug | (A) USA & Mexico |
| Frequency | 60 Hz | | |

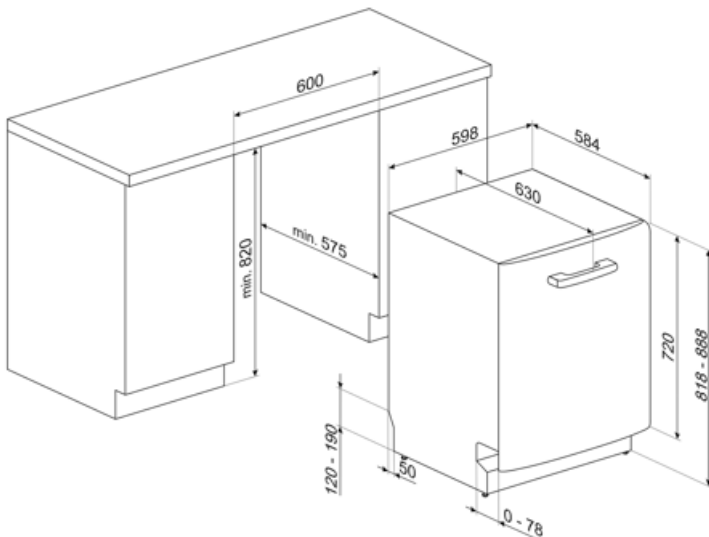

Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toe kick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60FABB



Toe kick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX



Toe kick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Alternative products



STU2FABCR2

Color: Cream



STU2FABRD2



















Color: Red



STU2FABBL2

Color: Black

Symbols glossary

| | |
|--|---|
|  <p>Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.</p> |  <p>COMM_HEIGHT_82_72dpi</p> |
|  <p>Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.</p> |  <p>Enersave: At the end of the drying cycle a special device slowly automatically opens the door a few centimeters, to ensure perfect drying and to save up to 20% of energy on some models.</p> |
|  <p>FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.</p> |  <p>FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.</p> |
|  <p>The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.</p> |  <p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p> |
|  <p>PLANETARIUM_WASHING_SYSTEM_72dpi</p> |  <p>Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.</p> |
|  <p>Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.</p> |  <p>Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.</p> |
|  <p>Soak programme: The soak programme provides a rinse to prevent dirt from drying.</p> |  <p>Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.</p> |
|  <p>The symbols show the number of plate settings of the dishwasher.</p> |  <p>Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.</p> |
|  <p>Allows you to enable additional programs when selected together with any wash cycle.</p> |  <p>STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.</p> |