

# STU8212



Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
N° baskets	2
EAN code	8017709303693



## Programs



N. of programmes	5	Delicate	Yes
Washing temperatures	45, 50, 65, 70 °F	Normal	Yes
Mix	Yes	Pots & Pans	Yes
1/2 load	Yes		

## Options



Delay timer option	3-6-9 hours	Intensive wash zone option
Extra dry option	Yes	

## Baskets

Basket colour	Grey	Lower Basket	With fixed racks
Upper Basket	With central fixed racks	Largest loadable dish in lower basket	35,0 inches
Height adjustment of the upper basket	On two levels, by extraction	Colour Inner Components	Blue
Largest loadable dish in upper basket	25,0 inches	Cutlery basket	13 place settings sliding


## Technical Features



<b>Width (mm)</b>	23 9/16 "	<b>Tub material</b>	Stainless steel
<b>Depth (mm)</b>	21 7/16 "	<b>Filter</b>	Stainless steel
<b>Product Height (mm)</b>	32 3/16 "	<b>Concealed heating element</b>	Yes
<b>Rinse aid indicator</b>	Light	<b>Hinges</b>	Self balancing with fixed hinges
<b>End of cycle indicator</b>	Acoustic signal	<b>Min. and max. frontal panel weight</b>	2 - 9 lbs
<b>Washing system</b>	Standard	<b>Min. and max plinth height</b>	100 - 228 mm
<b>Third spray arm</b>	Single	<b>Adjustable feet</b>	7cm, from 820 to 890 mm
<b>Flood protection system</b>	Single Acquastop	<b>Additional gaskets</b>	Yes
<b>Max water hardness</b>	100°FH;58°dH	<b>Back cover</b>	Yes
<b>Drying system</b>	Natural condenser drying		

## Electrical Connection

<b>Plug</b>	(A) USA e Messico	<b>Frequency (Hz)</b>	60 Hz
<b>Connected power</b>	1800 W	<b>Type of connection</b>	Single-phase
<b>Current</b>	13 A	<b>Power supply cable length</b>	140 "
<b>Voltage</b>	115 V		

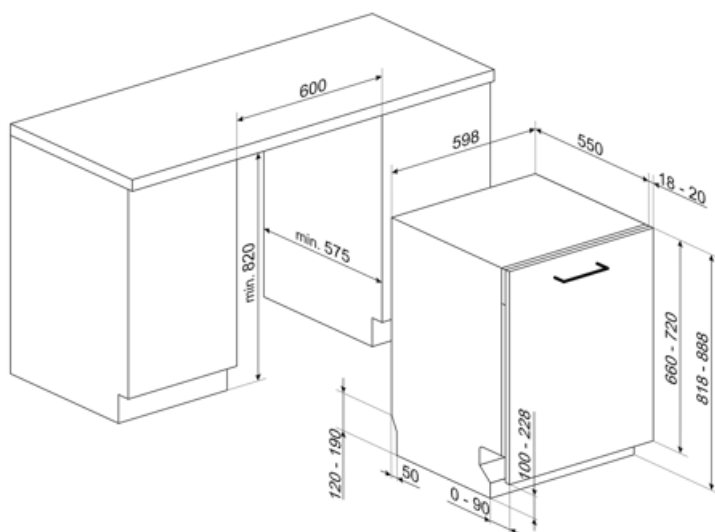

## Compatible Accessories



### KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.



### KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.



### KIT82CX



### KITPL60FABB

Toe kick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



### KITPL60FABN

Toe kick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



### KITPL60FABX











Toe kick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



### KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

## Symbols glossary

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		82 cm high
	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.		13 place settings: Number of place settings.
	System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.		EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.