STU8212



Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
N° baskets	2
EAN code	8017709303693

Programs

N. of programmes	5	**Delicate**	Yes
Washing temperatures	45, 50, 65, 70 °F	**Normal**	Yes
Mix	Yes	**Pots & Pans**	Yes
1/2 load	Yes		

Options

Delay timer option	3-6-9 hours	**Intensive wash zone option**	
Extra dry option	Yes		

Baskets

Basket colour	Grey	**Lower Basket**	With fixed racks
Upper Basket	With central fixed racks	**Largest loadable dish in lower basket**	35,0 inches
Height adjustment of the upper basket	On two levels, by extraction	**Colour Inner Components**	Blue
Largest loadable dish in upper basket	25,0 inches	**Cutlery basket**	13 place settings sliding

Technical Features


Width (mm)	23 9/16 "
Depth (mm)	21 7/16 "
Product Height (mm)	32 3/16 "
Rinse aid indicator	Light
End of cycle indicator	Acoustic signal
Washing system	Standard
Third spray arm	Single
Flood protection system	Single Acquastop
Max water hardness	100°fH;58°dH
Drying system	Natural condenser drying

Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with fixed hinges
Min. and max. frontal panel weight	2 - 9 lbs
Min. and max plinth height	100 - 228 mm
Adjustable feet	7cm, from 820 to 890 mm
Additional gaskets	Yes
Back cover	Yes
Energy Star	Yes

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency (Hz)	60 Hz

Type of connection	Single-phase
Power supply cable length	140 "
Plug	(A) USA e Messico

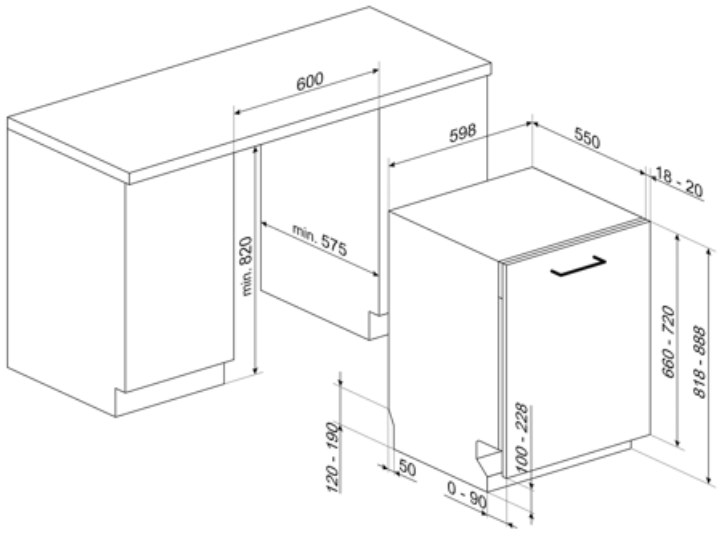

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.



KIT82CX



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



82 cm high



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



13 place settings: Number of place settings.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.