STU8212



Product family	Dishwasher
Width	24"
Commercial height	82 cm
Installation	Fully-Integrated
N° baskets	2
EAN code	8017709303693

Programs

Number of programs	5	**Delicates**	Yes
Washing temperatures	45, 50, 65, 70 °F	**Normal**	Yes
Mix	Yes	**Pots & Pans**	Yes
Daily (half load)	Yes		

Options

Delay start	3-6-9 hours	**Intensive washing zone option**	
Extra-dry option	Yes		

Baskets

Basket color	Gray	**Lower basket**	Fixed racks
Upper basket	Central fixed racks	**Largest loadable dish in lower basket**	35,0 inches
Upper basket height adjustment	On two height levels	**Colour Inner Components**	Blue
Largest loadable dish in upper basket	25,0 inches	**Cutlery basket**	13 place settings

Technical Features


Width	23 9/16 "
Depth	21 7/16 "
Height	32 3/16 "
Rinse aid indicator	Light
End-of-cycle indicator	Acoustic signal
Washing system	Standard
Third spray arm	Single
Flood protection system	Single Aquastop
Max water hardness	100°fH;58°dH
Drying system	Natural condensation drying

Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self-balancing with fixed hinges
Min. and max. frontal panel weight	4.4 - 19.8 lbs
Min. and max plinth height	4" - 9"
Adjustable feet	2 3/4", from 32 1/4" to 35"
Additional gaskets	Yes
Back cover	Yes
Energy Star	Yes

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency	60 Hz

Connection type	Single-phase
Power Cord Length	140 "
Plug	(A) USA & Mexico

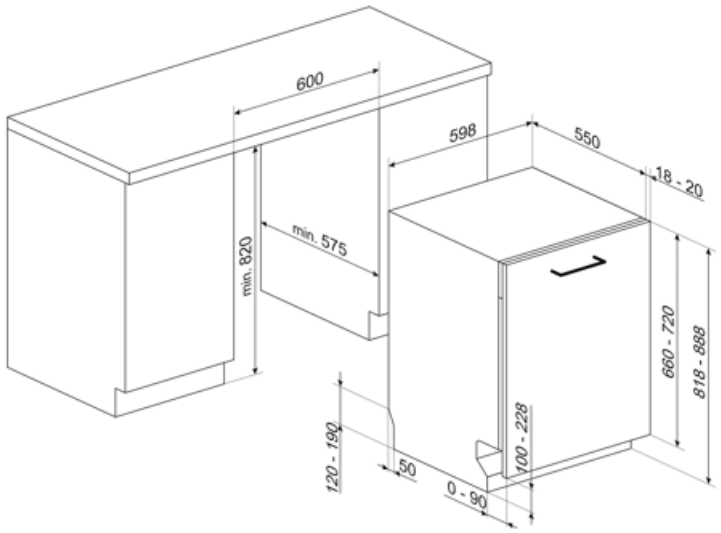

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.



KIT82CX



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.