STU8222

Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
N° baskets	2
EAN code	8017709303686



Programs

N. of programmes	10	**1/2 load**	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	**Delicate**	Yes
Soak	Yes	**Auto**	Yes
Express 27'	Yes	**Eco express**	Yes
Mix	Yes	**Express 60'**	Yes
Sterilise	Yes	**Pots & Pans**	Yes

Options

Delay timer option	3-6-9 hours	**Special programs option**	Yes
Intensive wash zone option			

Baskets

Basket colour	Grey	**Lower Basket**	With 2 foldable racks
Upper Basket	With 1 foldable rack	**Largest loadable dish in lower basket**	35,0 inches
Height adjustment of the upper basket	On three levels (5 cm)	**Colour Inner Components**	Blue
Sliding Guides Extra Glide	Yes		
Largest loadable dish in upper basket	25,0 inches	**Cutlery basket**	13 place settings sliding

Technical Features



Width (mm)	23 9/16 "
Depth (mm)	21 7/16 "
Product Height (mm)	32 3/16 "
Programme graphics	Symbols
Rinse aid indicator	Light
End of cycle indicator	Acoustic signal
Washing system	Orbital
Third spray arm	Single
Turbidity sensor Aquatest	Yes
Flood protection system	Total Acquastop
Max water hardness	100°fH;58°dH
Drying system	Natural condenser drying
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with fixed hinges
Min. and max. frontal panel weight	2 - 9 lbs
Min. and max plinth height	100 - 228 mm
Adjustable feet	7cm, from 820 to 890 mm
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1186 mm
Top cover	Metallic sheet
Energy Star	Yes


Performance / Energy Label - Reg. 2019



Airborne acoustical noise emissions	49 dB(A) re 1 pW

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency (Hz)	60 Hz
Type of connection	Single-phase
Power supply cable length	140 "
Plug	(A) USA e Messico

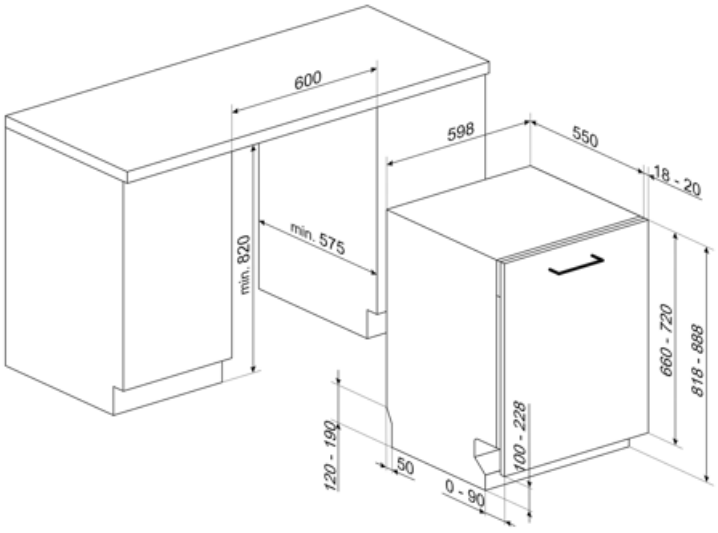
600
598
550
18 - 20
min. 820
min. 575
660 - 720
818 - 888
120 - 190
50
100 - 228
0 - 90

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.



KIT82CX

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX




Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



13 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.



82 cm high



The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Allows you to enable additional programs when selected together with any wash cycle.