

STU8222



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| N° baskets | 2 |
| EAN code | 8017709303686 |



Programs



| | | | |
|----------------------|-------------------------------|-------------|-----|
| N. of programmes | 10 | 1/2 load | Yes |
| Washing temperatures | 38, 45, 50, 55, 65, 70, 75 °F | Delicate | Yes |
| Soak | Yes | Auto | Yes |
| Express 27' | Yes | Eco express | Yes |
| Mix | Yes | Express 60' | Yes |
| Sterilise | Yes | Pots & Pans | Yes |

Options



| | | | |
|----------------------------|-------------|-------------------------|-----|
| Delay timer option | 3-6-9 hours | Special programs option | Yes |
| Intensive wash zone option | | | |

Baskets



| | | | |
|---------------------------------------|------------------------|---------------------------------------|---------------------------|
| Basket colour | Grey | Lower Basket | With 2 foldable racks |
| Upper Basket | With 1 foldable rack | Largest loadable dish in lower basket | 35,0 inches |
| Height adjustment of the upper basket | On three levels (5 cm) | Colour Inner Components | Blue |
| Sliding Guides Extra Glide | Yes | Cutlery basket | 13 place settings sliding |
| Largest loadable dish in upper basket | 25,0 inches | | |

Technical Features



| | | | |
|-------------------------|--------------------------|---|----------------------------------|
| Width (mm) | 23 9/16 " | Tub material | Stainless steel |
| Depth (mm) | 21 7/16 " | Filter | Stainless steel |
| Product Height (mm) | 32 3/16 " | Concealed heating element | Yes |
| Programme graphics | Symbols | Hinges | Self balancing with fixed hinges |
| Rinse aid indicator | Light | Min. and max. frontal panel weight | 2 - 9 lbs |
| End of cycle indicator | Acoustic signal | Min. and max plinth height | 100 - 228 mm |
| Washing system | Orbital | Adjustable feet | 7cm, from 820 to 890 mm |
| Third spray arm | Single | Additional gaskets | Yes |
| Turbidity sensor | Yes | Back cover | Yes |
| Aquatest | | Depth of dishwasher with open door (mm) | 1186 mm |
| Flood protection system | Total Acquastop | Top cover | Metallic sheet |
| Max water hardness | 100°FH;58°dH | | |
| Drying system | Natural condenser drying | | |


Performance / Energy Label - Reg. 2019



Airborne acoustical noise emissions 49 dB(A) re 1 pW

Electrical Connection

| | | | |
|-----------------|--------|---------------------------|-------------------|
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 13 A | Power supply cable length | 140 " |
| Voltage | 115 V | Plug | (A) USA e Messico |
| Frequency (Hz) | 60 Hz | | |

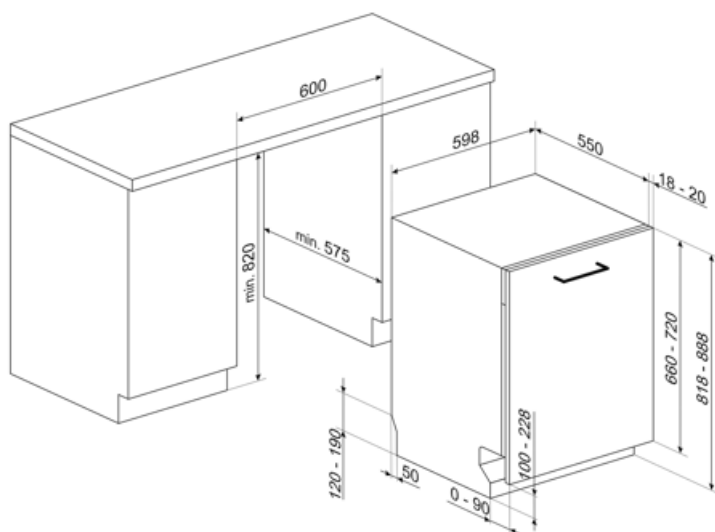

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.




KIT82CX



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX


















Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary

| | | | |
|--|--|---|--|
|  | The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water. |  | 82 cm high |
|  | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time. |  | The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |
|  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | 1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher. |
|  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation. |
|  | Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  | Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes. |  | STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles. |
|  | 13 place settings: Number of place settings. |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. | | |