STU8222



Product family	Dishwasher
Width	24"
Commercial height	82 cm
Installation	Fully-Integrated
N° baskets	2
EAN code	8017709303686

Programs

Number of programs	10	**Daily (half load)**	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	**Delicates**	Yes
Soak	Yes	**Auto**	Yes
Express	Yes	**Eco express**	Yes
Mix	Yes	**Express 60'**	Yes
Sterilize	Yes	**Pots & Pans**	Yes

Options

Delay start	3-6-9 hours	**Special programs option**	Yes
Intensive washing zone option			

Baskets

Basket color	Gray	**Lower basket**	With 2 foldable racks
Upper basket	1 foldable rack	**Largest loadable dish in lower basket**	35,0 inches
Upper basket height adjustment	On 3 levels	**Colour Inner Components**	Blue
Sliding Guides Extra Glide	Yes	**Cutlery basket**	13 place settings
Largest loadable dish in upper basket	25,0 inches		

Technical Features



Width	23 9/16 "
Depth	21 7/16 "
Height	32 3/16 "
Program symbols	Symbols
Rinse aid indicator	Light
End-of-cycle indicator	Acoustic signal
Washing system	Orbital
Third spray arm	Single
Turbidity sensor Aquatest	Yes
Flood protection system	Total Aquastop
Max water hardness	100°fH;58°dH
Drying system	Natural condensation drying

Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self-balancing with fixed hinges
Min. and max. frontal panel weight	4.4 - 19.8 lbs
Min. and max plinth height	4" - 9"
Adjustable feet	2 3/4", from 32 1/4" to 35"
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1186 mm
Top cover	Metal sheet
Energy Star	Yes

Performance / Energy Label




Airborne acoustical noise emissions (spinning phase)	49 dB(A) re 1 pW

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency	60 Hz

Connection type	Single-phase
Power Cord Length	140 "
Plug	(A) USA & Mexico

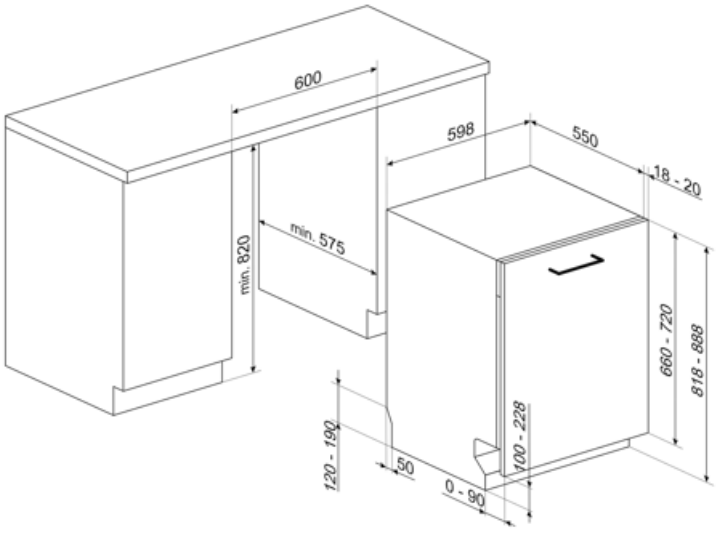
600
598
550
18 - 20
min. 820
min. 575
660 - 720
818 - 888
120 - 190
50
0 - 90
100 - 228

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.



KIT82CX

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.




KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Allows you to enable additional programs when selected together with any wash cycle.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



COMM_HEIGHT_82_72dpi



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.