

STU8222



| | |
|-------------------|------------------|
| Product family | Dishwashers |
| Width | 24" |
| Commercial height | 82 cm |
| Installation | Fully-Integrated |
| N° baskets | 2 |
| EAN code | 8017709303686 |



Programs



| | | | |
|----------------------|-------------------------------|-------------------|-----|
| Number of programs | 10 | Daily (half load) | Yes |
| Washing temperatures | 38, 45, 50, 55, 65, 70, 75 °F | Delicates | Yes |
| Soak | Yes | Auto | Yes |
| Express 27' | Yes | Eco express | Yes |
| Mix | Yes | Express 60' | Yes |
| Sterilize | Yes | Pots & Pans | Yes |

Options



| | | | |
|-------------------------------|-------------|-------------------------|-----|
| Delay start | 3-6-9 hours | Special programs option | Yes |
| Intensive washing zone option | | | |

Baskets



| | | | |
|---------------------------------------|-----------------|---------------------------------------|-----------------------|
| Basket color | Gray | Lower basket | With 2 foldable racks |
| Upper basket | 1 foldable rack | Largest loadable dish in lower basket | 35,0 inches |
| Upper basket height adjustment | On 3 levels | Colour Inner Components | Blue |
| Sliding Guides Extra Glide | Yes | Cutlery basket | 13 place settings |
| Largest loadable dish in upper basket | 25,0 inches | | |

Technical Features



| | | | |
|----------------------------------|-----------------------------|--|----------------------------------|
| Width | 23 9/16 " | Tube material | Stainless steel |
| Depth | 21 7/16 " | Filter | Stainless steel |
| Height | 32 3/16 " | Concealed heating element | Yes |
| Program symbols | Symbols | Hinges | Self-balancing with fixed hinges |
| Rinse aid indicator | Light | Min. and max. frontal panel weight | 4.4 - 19.8 lbs |
| End-of-cycle indicator | Acoustic signal | Min. and max plinth height | 4" - 9" |
| Washing system | Orbital | Adjustable feet | 2 3/4", from 32 1/4" to 35" |
| Third spray arm | Single | Additional gaskets | Yes |
| Turbidity sensor Aquatest | Yes | Back cover | Yes |
| Flood protection system | Total Aquastop | Depth of dishwasher with open door (mm) | 1186 mm |
| Max water hardness | 100°FH;58°dH | Top cover | Metal sheet |
| Drying system | Natural condensation drying | | |


Performance / Energy Label



Airborne acoustical noise emissions (spinning phase) 49 dB(A) re 1 pW

Electrical Connection

| | | | |
|------------------------|--------|----------------------------------|------------------|
| Connected power | 1800 W | Connection type | Single-phase |
| Current | 13 A | Power supply cable length | 140 " |
| Voltage | 115 V | Plug | (A) USA & Mexico |
| Frequency (Hz) | 60 Hz | | |

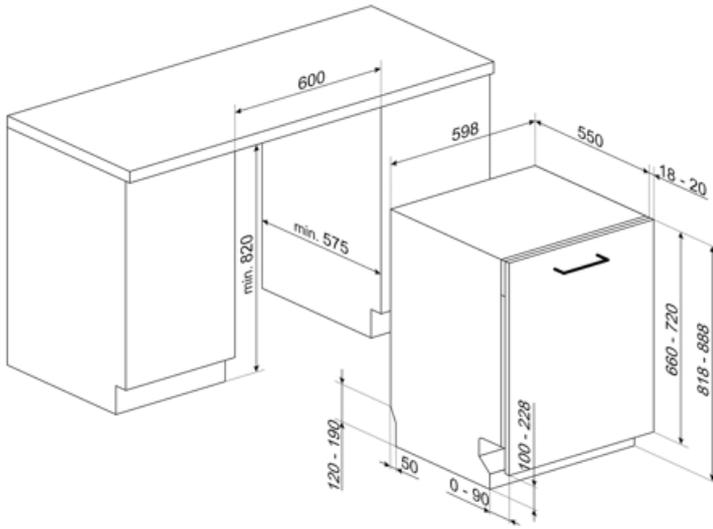

Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.




KIT82CX



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fitted on the fully integrated dishwashers.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

Symbols glossary

| | | | |
|--|---|---|--|
|  | Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy. |  | COMM_HEIGHT_82_72dpi |
|  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |  | The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |
|  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | 1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher. |
|  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use. |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |  | Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load. |
|  | The symbols show the number of plate settings of the dishwasher. |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. |  | Allows you to enable additional programs when selected together with any wash cycle. |
|  | STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles. | | |