

STU8612



Product Family Dishwashers Commercial width 60 cm

Commercial height 86 cm

Installation Fully-integrated built-in

N° baskets

EAN code 8017709303631



Programs







N. of programmes 5 Delicate Yes Washing temperatures 45, 50, 65, 70 °F Normal Yes Pots & Pans Yes Yes

1/2 load Yes

Options





Delay timer option 3-6-9 hours Intensive wash zone

option Extra dry option Yes

Baskets

Basket colour **Upper Basket**

Height adjustment of the upper basket

Largest loadable dish in 18,0 inches

upper basket

With central fixed racks On two levels, by extraction

Components

With fixed racks Lower Basket Largest loadable dish in 35,0 inches

lower basket Colour Inner

Blue

Cutlery basket Yes

Technical Features



SMEG SPA 2025-11-24



Width (mm) 23 9/16 " 21 5/8 " Depth (mm) Product Height (mm) 33 3/4 " Programme graphics Symbols Rinse aid indicator Light End of cycle indicator Acoustic signal

Standard Washing system Third spray arm Single

Flood protection system Single Acquastop Max water hardness 100°fH;58°dH

Natural condenser drying Drying system

Tub material Stainless steel Filter Stainless steel

Self balancing with fixed Hinges hinges

Min. and max. frontal 2 - 8 lbs panel weight

Min. and max plinth

height

Adjustable feet 7cm, from 860 to 930 mm

100 - 228 mm

Additional gaskets Yes Back cover Yes 1186 mm


Depth of dishwasher with open door (mm)

Top cover Metallic sheet

Electrical Connection

Frequency (Hz)

Type of connection Connected power 1800 W Single-phase Current 13 A Power supply cable 140 " length Voltage 115 V Plug (A) USA e Messico

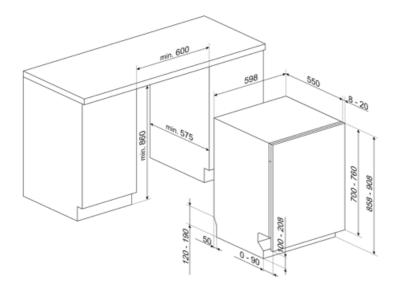

60 Hz

SMEG SPA 2025-11-24



Compatible Accessories



KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm Compatible with models with Flexifit and fixed fulcrum hinges.



KIT86VX

stainless steel panel with Victoria handle. Can be fittet on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



SMEG SPA 2025-11-24



Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



86 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



13 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.

SMEG SPA 2025-11-24