

# STU8612



Product family	Dishwashers
Width	24"
Commercial height	86 cm
Installation	Fully-Integrated
N° baskets	2
EAN code	8017709303631



## Programs



Number of programs	5	Delicates	Yes
Washing temperatures	45, 50, 65, 70 °F	Normal	Yes
Mix	Yes	Pots & Pans	Yes
Daily (half load)	Yes		

## Options



Delay start	3-6-9 hours	Intensive washing zone option	
Extra-dry option	Yes		

## Baskets

Basket color	Gray	Lower basket	Fixed racks
Upper basket	Central fixed racks	Largest loadable dish in lower basket	35,0 inches
Upper basket height adjustment	On two height levels	Colour Inner Components	Blue
Largest loadable dish in upper basket	18,0 inches	Cutlery basket	Yes


## Technical Features



<b>Width</b>	23 9/16 "	<b>Tub material</b>	Stainless steel
<b>Depth</b>	21 5/8 "	<b>Filter</b>	Stainless steel
<b>Height</b>	33 3/4 "	<b>Hinges</b>	Self-balancing with fixed hinges
<b>Program symbols</b>	Symbols	<b>Min. and max. frontal panel weight</b>	4.4 - 17.6 lbs
<b>Rinse aid indicator</b>	Light	<b>Min. and max plinth height</b>	4" - 9"
<b>End-of-cycle indicator</b>	Acoustic signal	<b>Adjustable feet</b>	2 3/4", from 33 7/8" to 36 5/8"
<b>Washing system</b>	Standard	<b>Additional gaskets</b>	Yes
<b>Third spray arm</b>	Single	<b>Back cover</b>	Yes
<b>Flood protection system</b>	Single Aquastop	<b>Depth of dishwasher with open door (mm)</b>	1186 mm
<b>Max water hardness</b>	100°FH;58°dH	<b>Top cover</b>	Metal sheet
<b>Drying system</b>	Natural condensation drying	<b>Energy Star</b>	Yes

## Electrical Connection

<b>Connected power</b>	1800 W	<b>Connection type</b>	Single-phase
<b>Current</b>	13 A	<b>Power Cord Length</b>	140 "
<b>Voltage</b>	115 V	<b>Plug</b>	(A) USA & Mexico
<b>Frequency</b>	60 Hz		

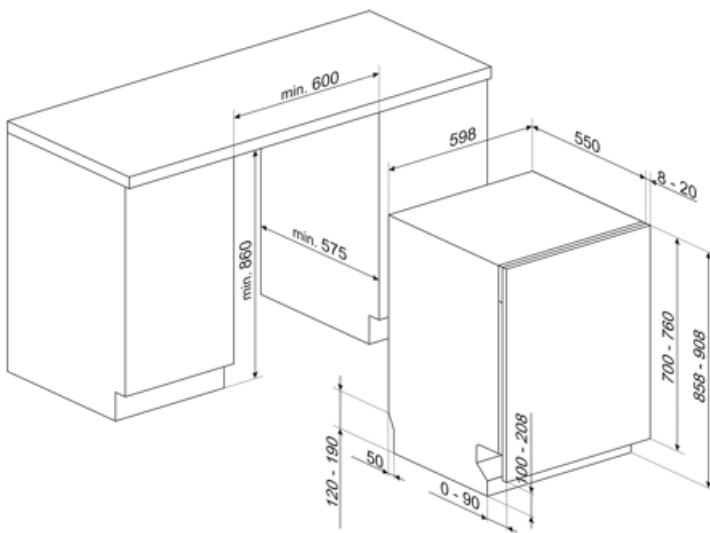

## Compatible Accessories



### KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm  
Compatible with models with Flexifit and fixed fulcrum hinges.



### KIT86VX

stainless steel panel with Victoria handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel

### KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



### KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.













### KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2



## Symbols glossary

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		COMM_HEIGHT_86_72dpi
	Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.		1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.		Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.
	The symbols show the number of plate settings of the dishwasher.		System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.