

STU8612



Product family Dishwashers

24" Width 86 cm Commercial height

Installation Fully-integrated built-in

N° baskets

EAN code 8017709303631



Yes

Yes

Yes

Programs







Number of programs **Delicates** 45, 50, 65, 70 °F Washing temperatures Normal

Yes

Daily (half load) Yes Pots & Pans

Options





3-6-9 hours Delay start

Extra-dry option Yes

Baskets

Basket color Gray

Upper basket Central fixed racks Upper basket height On two height levels

adjustment

Largest loadable dish in 18,0 inches

upper basket

Lower basket Fixed racks Largest loadable dish in 35,0 inches

lower basket

Colour Inner Blue

Components

Cutlery basket Yes

Technical Features



23 9/16 " **Tub** material Width Stainless steel

SMEG SPA 1/15/2025



21 5/8 " Depth Height 33 3/4 " Program symbols **Symbols** Rinse aid indicator Light **End-of-cycle indicator** Acoustic signal Washing system Standard

Third spray arm Single Flood protection system Single Aquastop 100°fH:58°dH Max water hardness Drying system Natural condensation

drying

115 V

Filter Stainless steel

Self-balancing with fixed Hinges

hinges

4" - 9"

Min. and max. frontal 4.4 - 17.6 lbs

panel weight

Min. and max plinth

height

Adjustable feet 2 3/4", from 33 7/8" to 36

5/8"

1186

Additional gaskets Yes Back cover Yes


Depth of dishwasher with open door (mm)

Top cover Metal sheet

Electrical Connection

Voltage

Plug (A) USA & Mexico Frequency (Hz) 60 Hz Connected power 1800 W Connection type Single-phase 140 " Current Power supply cable 13 A length

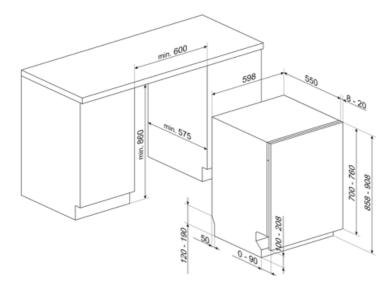

1/15/2025 **SMEG SPA**



Not included accessories



KIT86CX-1

KIT86X

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm Compatible with models with Flexifit and fixed fulcrum hinges.

stainless steel panel with holes for

Canali or Opera handle. Can be fittet on

with no Flexifit hinges. It is not possible

to install it on the models with stainless

the fully integrated dishwashers H86



KIT86VX

stainless steel panel with Victoria handle. Can be fittet on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

steel panel

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2



SMEG SPA 1/15/2025



Symbols glossary (TT)



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



COMM_HEIGHT_86_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



...



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.

SMEG SPA 1/15/2025