

STU8612X



| | |
|-------------------|------------------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 86 cm |
| Installation | Under counter built-in |
| N° baskets | 2 |
| Motor | Single phase |
| EAN code | 8017709303662 |



Programs / Functions



| | | | |
|----------------------|-------------------|-------------|-----|
| N. of programmes | 5 | Delicate | Yes |
| Washing temperatures | 45, 50, 65, 70 °F | Normal | Yes |
| Soak | Yes | Pots & Pans | Yes |
| Mix | Yes | | |

Options



| | | | |
|--------------------|---------------|---------------------------|-----|
| Delay timer option | Up to 9 hours | 1/2 load FlexiZone option | Yes |
| Extra dry option | Yes | | |

Baskets

| | | | |
|---------------------------------------|------------------------------|---------------------------------------|------------------|
| Basket colour | Grey | Lower Basket | With fixed racks |
| Upper Basket | With central fixed racks | Largest loadable dish in lower basket | 35,0 inches |
| Glass holder | Yes | Colour Inner Components | Blue |
| Height adjustment of the upper basket | On two levels, by extraction | Cutlery basket | Yes |
| Largest loadable dish in upper basket | 18,0 inches | | |


Technical Features



| | | | |
|-------------------------|-----------------------|---|----------------------------------|
| Width (mm) | 23 9/16 " | Drying system | Natural condenser drying |
| Depth (mm) | 21 5/8 " | Tube material | Stainless steel |
| Display type | LED display (1 digit) | Filter | Stainless steel |
| Product Height (mm) | 33 3/4 " | Hinges | Self balancing with fixed hinges |
| Display | Delayed start | Min. and max. frontal panel weight | 2 - 8 lbs |
| Programme graphics | Symbols | Min. and max plinth height | 100 - 228 mm |
| Rinse aid indicator | Light | Adjustable feet | 7cm, from 860 to 930 mm |
| End of cycle indicator | Acoustic signal | Additional gaskets | Yes |
| Washing system | Standard | Back cover | Yes |
| Third spray arm | Single | Depth of dishwasher with open door (mm) | 1186 |
| Flood protection system | Single Acquastop | Top cover | Metallic sheet |
| Max water hardness | 100°FH;58°dH | | |

Electrical Connection

| | | | |
|-----------------|-------------------|---------------------------|--------------|
| Plug | (A) USA e Messico | Frequency (Hz) | 60 Hz |
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 13 A | Power supply cable length | 140 " |
| Voltage | 115 V | | |

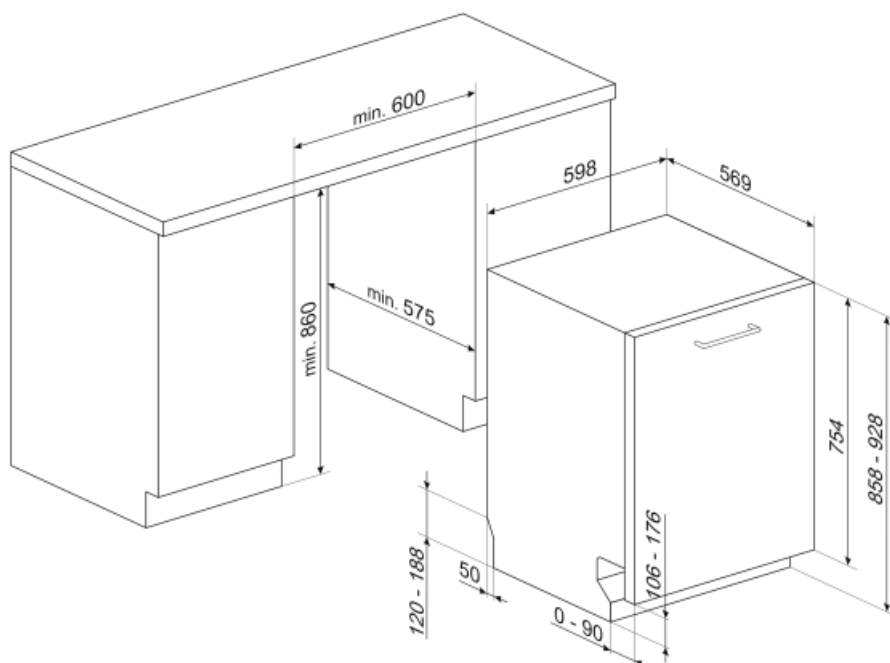

Not included accessories

KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX











Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary (TT)

| | | | |
|--|--|---|--|
|  | Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance. |  | 86 cm high |
|  | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time. |  | FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |
|  | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation. |  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  | 13 place settings: Number of place settings. |  | EXTRA DRY This option adds a hot rinse cycle that ensures improved drying. |