

# STU8612X



Product family	Dishwashers
Width	24"
Commercial height	86 cm
Installation	Under counter built-in
N° baskets	2
EAN code	8017709303662



## Programs



Number of programs	5	Delicates	Yes
Washing temperatures	45, 50, 65, 70 °F	Normal	Yes
Soak	Yes	Pots & Pans	Yes
Mix	Yes		

## Options



Delay start	Up to 9 hours	FlexiZone half-load option	Yes
Extra-dry option	Yes		

## Baskets

Basket color	Gray	Lower basket	Fixed racks
Upper basket	Central fixed racks	Largest loadable dish in lower basket	35,0 inches
Glass holder	Yes	Colour Inner Components	Blue
Upper basket height adjustment	On two height levels	Cutlery basket	Yes
Largest loadable dish in upper basket	18,0 inches		


## Technical Features



<b>Width</b>	23 9/16 "	<b>Drying system</b>	Natural condensation drying
<b>Depth</b>	21 5/8 "	<b>Tub material</b>	Stainless steel
<b>Display type</b>	LED display (1 digit)	<b>Filter</b>	Stainless steel
<b>Height</b>	33 3/4 "	<b>Hinges</b>	Self-balancing with fixed hinges
<b>Display</b>	Delay start	<b>Min. and max. frontal panel weight</b>	4.4 - 17.6 lbs
<b>Program symbols</b>	Symbols	<b>Min. and max plinth height</b>	4" - 9"
<b>Rinse aid indicator</b>	Light	<b>Adjustable feet</b>	2 3/4", from 33 7/8" to 36 5/8"
<b>End-of-cycle indicator</b>	Acoustic signal	<b>Additional gaskets</b>	Yes
<b>Washing system</b>	Standard	<b>Back cover</b>	Yes
<b>Third spray arm</b>	Single	<b>Depth of dishwasher with open door (mm)</b>	1186
<b>Flood protection system</b>	Single Aquastop	<b>Top cover</b>	Metal sheet
<b>Max water hardness</b>	100°FH;58°dH		

## Electrical Connection

<b>Plug</b>	(A) USA & Mexico	<b>Frequency (Hz)</b>	60 Hz
<b>Connected power</b>	1800 W	<b>Connection type</b>	Single-phase
<b>Current</b>	13 A	<b>Power supply cable length</b>	140 "
<b>Voltage</b>	115 V		

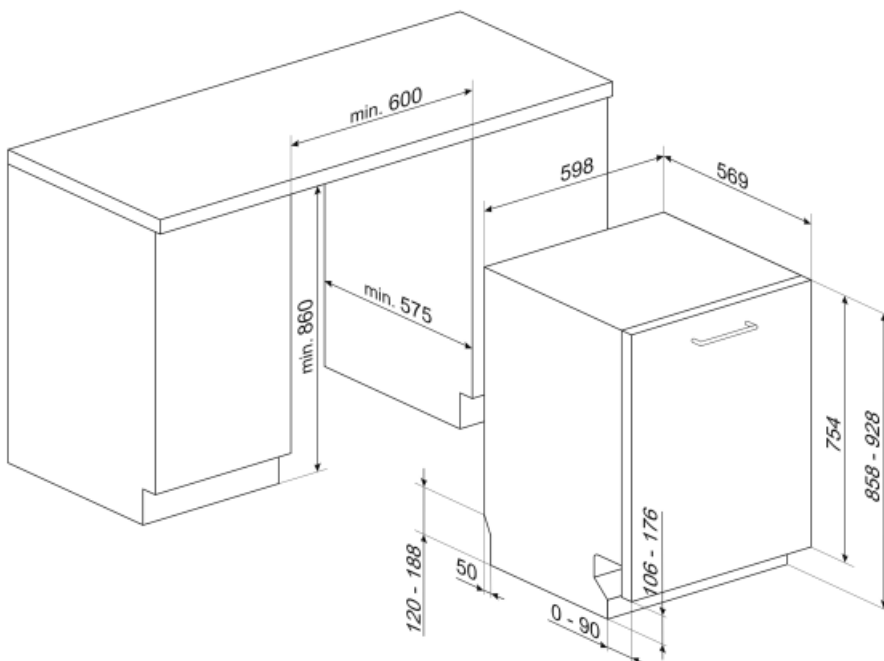

---

## Not included accessories

---

### KITPL60FABB



Toe kick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPL60FABN



Toe kick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPL60FABX













Toe kick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary (TT)

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		COMM_HEIGHT_86_72dpi
	Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.		FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.
	Noise Level: Excellent insulation and special devices keep noise to a minimum.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.		Soak programme: The soak programme provides a rinse to prevent dirt from drying.
	The symbols show the number of plate settings of the dishwasher.		...