STU8612X



Product family	Dishwasher
Width	24"
Commercial height	86 cm
Installation	Under-Counter
N° baskets	2
EAN code	8017709303662

Programs

Number of programs	5	**Delicates**	Yes
Washing temperatures	45, 50, 65, 70 °F	**Normal**	Yes
Soak	Yes	**Pots & Pans**	Yes
Mix	Yes		

Options

Delay start	Up to 9 hours	**FlexiZone half-load option**	Yes
Extra-dry option	Yes		

Baskets

Basket color	Gray	**Lower basket**	Fixed racks
Upper basket	Central fixed racks	**Largest loadable dish in lower basket**	35,0 inches
Glass holder	Yes	**Colour Inner Components**	Blue
Upper basket height adjustment	On two height levels	**Cutlery basket**	Yes
Largest loadable dish in upper basket	18,0 inches		

Technical Features


Width	23 9/16 "
Depth	21 5/8 "
Display type	LED display (1 digit)
Height	33 3/4 "
Display	Delay start
Program symbols	Symbols
Rinse aid indicator	Light
End-of-cycle indicator	Acoustic signal
Washing system	Standard
Third spray arm	Single
Flood protection system	Single Aquastop
Max water hardness	100°fH;58°dH

Drying system	Natural condensation drying
Tub material	Stainless steel
Filter	Stainless steel
Hinges	Self-balancing with fixed hinges
Min. and max. frontal panel weight	4.4 - 17.6 lbs
Min. and max plinth height	4" - 9"
Adjustable feet	2 3/4", from 33 7/8" to 36 5/8"
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1186 mm
Top cover	Metal sheet
Energy Star	Yes

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency	60 Hz

Connection type	Single-phase
Power Cord Length	140 "
Plug	(A) USA & Mexico

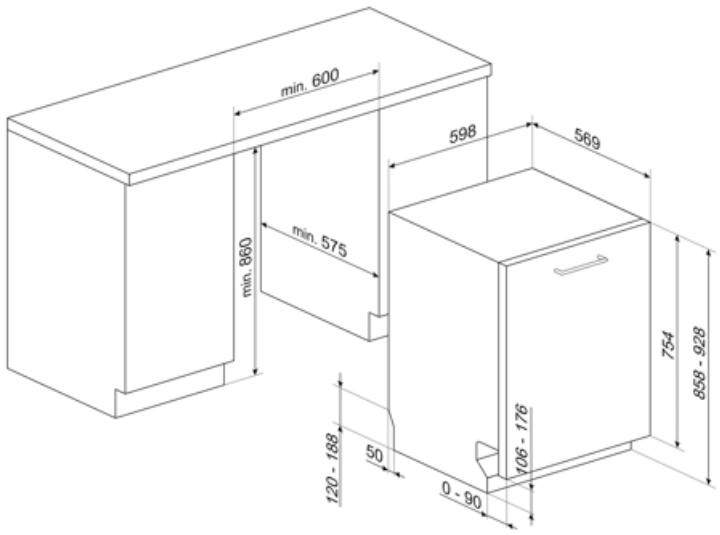

Compatible Accessories

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



COMM_HEIGHT_86_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



The symbols show the number of plate settings of the dishwasher.