

STU8623



Product family

Dishwashers

Width

24"

Commercial height

86 cm

Installation

Fully-Integrated

Nº baskets

3, FlexiDuo

EAN code

8017709303648



Programs



Number of programs

10

Delicates

Yes

Washing temperatures

38, 45, 50, 55, 65, 70, 75 °F

Normal

Yes

Soak

Yes

Crystal & China

Yes

Express 27'

Yes

Eco express

Yes

Mix

Yes

Express 60'

Yes

Sterilize

Yes

Pots & Pans

Yes

Options



Dry Assist option

Yes

FlexiZone half-load

Yes

Delay start

Up to 9 hours

option

Special programs option

Yes

Baskets



Basket color

Gray

Lower basket

With 2 foldable racks

Upper basket

1 foldable rack

Largest loadable dish in

35,0 inches

Upper basket height
adjustment

On 3 levels

lower basket

Blue

Sliding Guides Extra
Glide

Yes

Colour Inner
Components

Largest loadable dish in
upper basket

18,0 inches

Cutlery basket

Yes


Technical Features



Width	23 9/16 "	Max water hardness	100°fH;58°dH
Depth	21 5/8 "	Drying system	Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
Display type	LED display (3 digits)		
Height	33 3/4 "		
Display	Delay start, Program progress indicator, Time-to-end indicator	Tub material	Stainless steel
Program symbols	Symbols	Filter	Stainless steel
Salt indicator	Light	Concealed heating element	Yes
Rinse aid indicator	Light	Hinges	Self-balancing with variable hinges
End-of-cycle indicator	Light on display, with acoustic signal	Min. and max. frontal panel weight	4.4 - 19.8 lbs
Washing system	Orbital	Min. and max plinth height	4" - 9"
Third spray arm	Single	Adjustable feet	2 3/4", from 33 7/8" to 36 5/8"
Water softener	With electronic setting	Additional gaskets	Yes
Flood protection system	Single Aquastop	Back cover	Yes
		Depth of dishwasher with open door (mm)	1186 mm
		Top cover	Metal sheet

Electrical Connection

Connected power	1800 W	Connection type	Single-phase
Current	13 A	Power supply cable length	140 "
Voltage	115 V	Plug	(A) USA & Mexico
Frequency (Hz)	60 Hz		

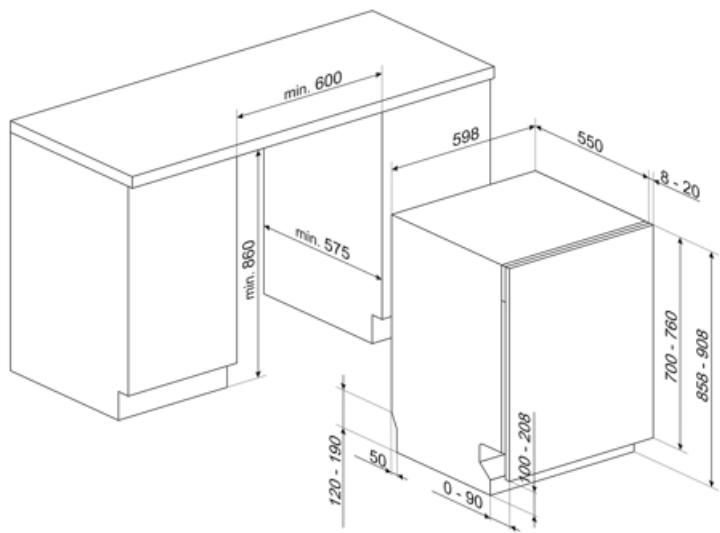

Compatible Accessories




KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm
Compatible with models with Flexifit and fixed fulcrum hinges.



KIT86VX

stainless steel panel with Victoria handle. Can be fitted on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.



COMM_HEIGHT_86_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Enersave: At the end of the drying cycle a special device slowly automatically opens the door a few centimeters, to ensure perfect drying and to save up to 20% of energy on some models.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



...



...