

STU8623X


Product Family

| | |
|-------------------|------------------------|
| Commercial width | 60 cm |
| Commercial height | 86 cm |
| Installation | Under counter built-in |
| Nº baskets | 3, FlexiDuo |
| EAN code | 8017709303679 |



Programs



| | | | |
|----------------------|-------------------------------|-----------------|-----|
| N. of programmes | 10 | Delicate | Yes |
| Washing temperatures | 38, 45, 50, 55, 65, 70, 75 °F | Normal | Yes |
| Soak | Yes | Crystal & China | Yes |
| Express 27' | Yes | Eco express | Yes |
| Mix | Yes | Express 60' | Yes |
| Sterilise | Yes | Pots & Pans | Yes |

Options



| | | | |
|--------------------|----------------|---------------------------|-----|
| Dry Assist option | Yes | 1/2 load FlexiZone option | Yes |
| Delay timer option | Up to 24 hours | Special programs option | Yes |

Baskets



| | | | |
|---------------------------------------|------------------------|---------------------------------------|-----------------------|
| Basket colour | Grey | Largest loadable dish in upper basket | 18,0 inches |
| Upper Basket | With 1 foldable rack | Lower Basket | With 2 foldable racks |
| Glass holder | Yes | Largest loadable dish in lower basket | 35,0 inches |
| Height adjustment of the upper basket | On three levels (5 cm) | Colour Inner Components | Blue |
| Sliding Guides Extra Glide | Yes | | |

Cutlery basket

Yes


Technical Features



| | | | |
|-------------------------|---|---|---|
| Width (mm) | 23 9/16 " | Max water hardness | 100°fH;58°dH |
| Depth (mm) | 21 5/8 " | Drying system | Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle |
| Display type | LED display (3 digit) | Tub material | Stainless steel |
| Product Height (mm) | 33 3/4 " | Filter | Stainless steel |
| Display | Delayed start, Programme time indicator, Time to end indication | Hinges | Self balancing with variable hinges |
| Programme graphics | Symbols | Min. and max. frontal panel weight | 2 - 8 lbs |
| Salt light indicator | Light | Min. and max plinth height | 100 - 228 mm |
| Rinse aid indicator | Light | Adjustable feet | 7cm, from 860 to 930 mm |
| End of cycle indicator | Acoustic signal | Additional gaskets | Yes |
| Washing system | Orbital | Back cover | Yes |
| Third spray arm | Single | Depth of dishwasher with open door (mm) | 1186 mm |
| Water softener | With electronic setting | Adjustable plinth | By height and depth |
| Flood protection system | Single Acquastop | Top cover | Metallic sheet |


Electrical Connection

| | | | |
|-----------------|--------|---------------------------|-------------------|
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 13 A | Power supply cable length | 140 " |
| Voltage | 115 V | Plug | (A) USA e Messico |
| Frequency (Hz) | 60 Hz | | |

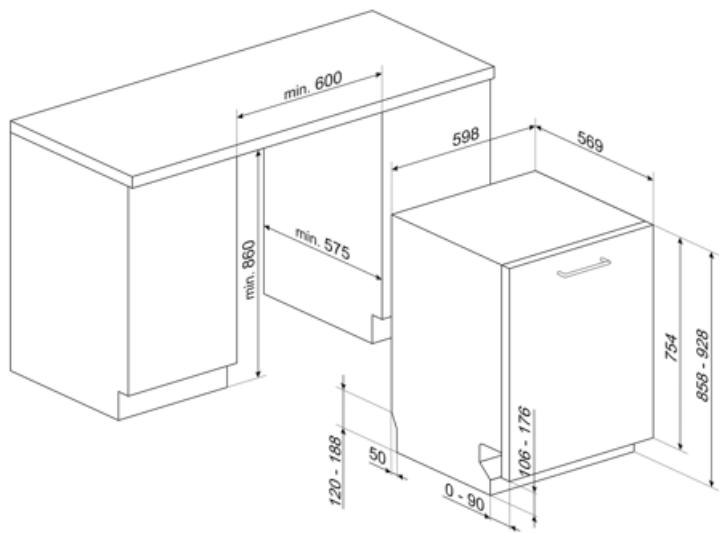

Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Allows you to enable additional programs when selected together with any wash cycle.



86 cm high



The Dry Assist option ensures optimal drying of the dishes by automatically opening the door at the end of the wash cycle. Reducing the rinse temperat



FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



13 place settings: Number of place settings.



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.