STU8633



Product family	Dishwasher
Width	24"
Commercial height	86 cm
Installation	Fully-Integrated
N° baskets	3, FlexiDuo
EAN code	8017709303655

Programs

Number of programs	10+1	**Daily (half load)**	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	**Delicates**	Yes
Soak	Yes	**Auto**	Yes
Express	Yes	**Crystal & China**	Yes
Mix	Yes	**Eco express**	Yes
Self Clean	Yes	**Pots & Pans**	Yes
Sterilize	Yes		

Options

Dry Assist option	Yes	**Intensive washing zone option**	
Delay start	Up to 24 hours	**Special programs option**	Yes

Baskets

Basket color	Gray	**Lower basket**	With 4 foldable racks
Upper basket	3 foldable racks	**Largest loadable dish in lower basket**	35,0 inches
Upper basket height adjustment	On 3 levels	**Colour Inner Components**	Blue
Sliding Guides Extra Glide	Yes	**Cutlery basket**	Yes

Largest loadable dish in upper basket	18,0 inches

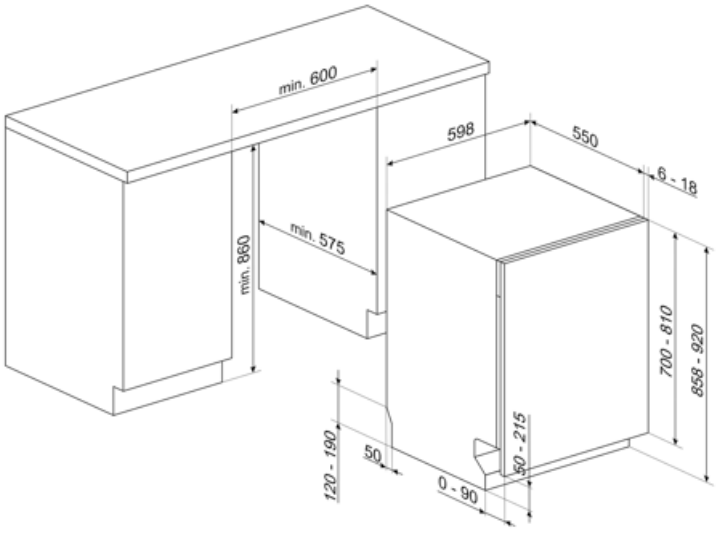
Technical Features



Width	23 9/16 "
Depth	21 5/8 "
Display type	LED display (3 digits)
Height	33 3/4 "
Display	Delay start, Program progress indicator, Time-to-end indicator
Program symbols	Symbols
Salt indicator	Light
Rinse aid indicator	Light
End-of-cycle indicator	ActiveLight
Washing system	Planetarium
Third spray arm	Single
Water softener	With electronic setting
Turbidity sensor Aquatest	Yes
Flood protection system	Total Aquastop
Max water hardness	100°fH;58°dH
Drying system	Dry Assist
Internal lighting	White LED
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self-balancing, Sliding, FLEXIFIT
Min. and max. frontal panel weight	4.4 - 22 lbs
Min. and max plinth height	50 - 215 mm
Adjustable feet	2 3/4", from 33 7/8" to 36 5/8"
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1186 mm
Top cover	Metal sheet
Energy Star	Yes

Electrical Connection

Connected power	1800 W
Current	13 A
Voltage	115 V
Frequency	60 Hz
Connection type	Single-phase
Power Cord Length	140 "
Plug	(A) USA & Mexico



min. 600
598
550
6 - 18
min. 575
min. 860
700 - 810
858 - 920
120 - 190
50
50 - 215
0 - 90

Compatible Accessories



KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm Compatible with models with Flexifit and fixed fulcrum hinges.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



KITFLEXI



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



COMM_HEIGHT_86_72dpi



Enersave: At the end of the drying cycle a special device slowly automatically opens the door a few centimeters, to ensure perfect drying and to save up to 20% of energy on some models.



Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Allows you to enable additional programs when selected together with any wash cycle.



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



PLANETARIUM_WASHING_SYSTEM_72dpi



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.