# SWT262TAUS

| | |
|---|---|
| **Type** | Fresh Water System Dishwasher |
| **Crockery** | Crockery; Glasses; Cutlery |
| **Wash pump** | Standard |
| **Power connection** | 400 V 3N~ / 12 A / 7 kW / 50 Hz |
| **Product dimensions WxDxH** | 600x600x850 mm |

## Distribution

| | |
|---|---|
| **Industries** | Care facilities |

## Aesthetics

| | |
|---|---|
| **Led color** | Orange |

## Technical Features

| | |
|---|---|
| **Wash pump flow** | 400 L / min |
| **Min. water connection temperature** | 8°C |
| **Minimum water consumption per cycle** | 10 l |
| **Max. inlet temperature** | 60°C |
| **Max water hardness** | 40°f - 22°dH |
| **Detergent load** | 1,5 l/h |
| **Rinse load** | 0,4 l/h |
| **Depth with open door** | 1200 mm |
| **Max dish height lowe basket** | 290 mm |
| **Max dish diameter upper basket** | 240 mm |

## Programs

| | |
|---|---|
| **Programs** | 7 automatic programs |
| **Program table** | Thermodisinfection dishwasher |
| **Preferred program setting** | Yes |
| **Repeat Function** | Yes |

| | |
|---|---|
| **Regeneration and complete drain cycle** | Yes |
| **Rinse temperature (max)** | 93 °C |
| **Maximum wash cycle duration with thermal disinfection** | 34 min |
| **Grade of lethality of thermal disinfection (A0)** | A0 = 6.000 (93° C / 5') - A0 = 12.000 (93° C / 10') |
| **Maximum wash cycle duration** | 8 min |
| **Maximum place settings capacity** | 12 |
| **Maximum place settings capacity/hour** | 90 |

## Electrical Connection

| | | | |
|---|---|---|---|
| **Tank heating element power** | 6400 W | **Electrical connection option** | 230 V 3~ / 19 A / 7 kW / 50 Hz; 220 V~ / 12 A / 2,8 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz |
| **Wash pump power** | 400 W | | |
| **Default connection** | 7000 W | **Plug** | No |

## Interface

| | | | |
|---|---|---|---|
| **Display** | 4 digit | **Detergent missing alert** | Yes |
| **On/Off button** | Yes | **Cycle progress alert** | Yes |
| **Salt alert** | Yes | **End-cycle alert** | Yes |
| **Rinse aid missing alert** | Yes | **Manual diagnostic** | Yes |

## Construction

| | | | |
|---|---|---|---|
| **Tank** | Deep drawn | **Rack guides** | Embossed |
| **Tank material** | Stainless steel AISI 304 | **Filter** | 3-stages filter system |
| **Back panel** | Galvanized | **Condensatore** | Yes |
| **Upper washing system** | One washing and one single rinse spray arms, stainless steel | **Rumorosità** | Lpa 51,7 dBA |
| | | **Automatic opening door** | Yes |
| | | **Adjustable feet** | Yes |
| **Lower washing system** | One washing and one single rinse spray arms, stainless steel | **Drain max. height** | 1000 mm |
| | | **Power cable length** | 150 cm |
| **Balanced door** | Yes | | |
| **Tank filter** | Stainless steel | | |
| **Door gasket** | On 3 sides | | |

## Accessories Included

| | | | |
|---|---|---|---|
| **Water supply pipe** | In acciaio Watermark | **Drain pipe** | Yes - 2m |

## Equipments

| | | | |
|---|---|---|---|
| **Drain pump** | Yes | **Break tank** | Yes |

| | | | |
|---|---|---|---|
| **Detergent and rinse dispender on the door** | Yes | **Door lock** | Yes |
| **Automatic incorporated softener** | Yes | **Detergent (red) hose length** | 2,2 m |
| **Wash pump soft start system** | Yes | **Rinse aid (blue) hose length** | 2,2 m |
| **Cycle counter** | Yes | | |

## Logistic Information

| | | | |
|---|---|---|---|
| **EAN code** | 8017709286392 | **Net weight** | 76.000 kg |
| **Packed product dimensions (WxDxH)** | 660x790x1050 mm | **Gross weight (kg)** | 84.000 kg |

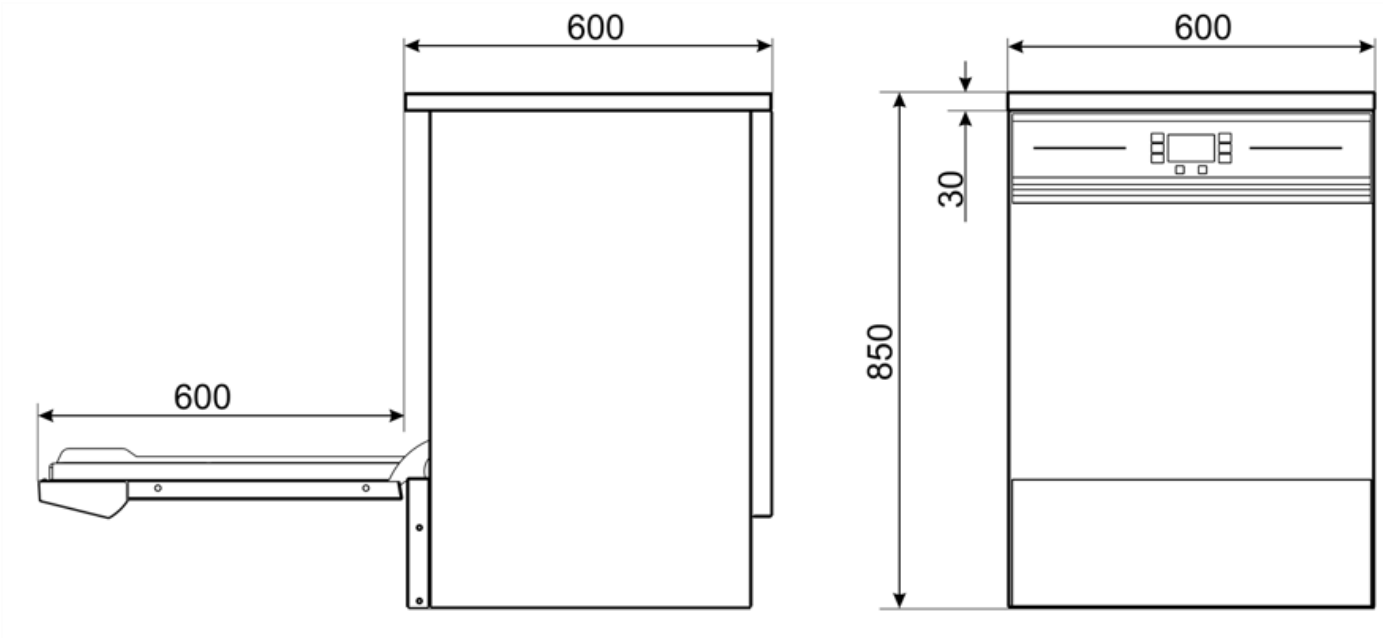

## Compatible Accessories

**AS4060**

Underframe for Fresh water system dishwashers

**B6040L**

Underframe for Fresh water system dishwashers

**KSLR260**

Probe level kit

**KSP**

Kit steam protector for SWT



**PB50D01**

Basket made of polypylene for 18 plates 500x500

**PHOOS02**

Basket in polypropylene for cutlery with 6 compartments

**STNBIN**

Closing plint for SWT models

**T6040**

Underframe for Fresh water system dishwashers

**TOP60I**

Upper cover for models SWT when removing built-in panel

## Symbols glossary

Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

# Benefit (TT)

### Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

### Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### Chemical dispenser on the door

Optimised space and simplified maintenance

The detergent and rinse aid dispenser positioned on the door optimises the internal space of the machine, reducing clutter and keeping the work area tidy. Additionally, it provides easy access for refills and maintenance without the need to open the main body of the machine.

### SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers. The design of the surfaces, with rounded corners in the tank and moulded basket guides, prevents dirt accumulation and makes cleaning the machine easier. Additionally, the moulded base directs any residue towards the filter.

**Moulded tank**

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.