

# SWT262TAUS

<b>Family</b>	Dishwasher
<b>Subfamily</b>	Dishwasher with thermal disinfection
<b>Type</b>	Fresh Water System Dishwasher
<b>Crockery</b>	Crockery; Glasses; Cutlery
<b>Wash pump</b>	Standard
<b>Power connection</b>	400 V 3N~ / 12 A / 7 kW / 50 Hz
<b>Product dimensions WxDxH</b>	600x600x850 mm



## Distribution

<b>Industries</b>	Care facilities
-------------------	-----------------

## Aesthetics

<b>Led color</b>	Orange
------------------	--------

## Technical Features

<b>Wash pump flow</b>	400 L / min	<b>Detergent load</b>	1,5 l/h
<b>Min. water connection temperature</b>	8°C	<b>Rinse load</b>	0,4 l/h
<b>Minimum water consumption per cycle</b>	10 l	<b>Depth with open door</b>	1200 mm
<b>Max. inlet temperature</b>	60°C	<b>Max dish height lower basket</b>	290 mm
<b>Max water hardness</b>	40°f - 22°dH	<b>Max dish diameter upper basket</b>	240 mm

## Programs

<b>Programs</b>	7 automatic programs
<b>Program table</b>	Thermodisinfection dishwasher
<b>Preferred program setting</b>	Yes
<b>Repeat Function</b>	Yes
<b>Regeneration and complete drain cycle</b>	Yes
<b>Rinse temperature (max)</b>	93 °C
<b>Maximum wash cycle duration with thermal disinfection</b>	34 min

<b>Grade of lethality of thermal disinfection (AI)</b>	AI = 6.000 (93° C / 5') - AI = 12.000 (93° C / 10')
<b>Maximum wash cycle duration</b>	8 min
<b>Maximum place settings capacity</b>	12
<b>Maximum place settings capacity/hour</b>	90

## Electrical Connection

<b>Tank heating element power</b>	6400 W	<b>Electrical connection option</b>	230 V 3~ / 19 A / 7 kW / 50 Hz; 220 V~ / 12 A / 2,8 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz
<b>Wash pump power</b>	400 W	<b>Plug</b>	No
<b>Default connection</b>	7000 W		

## Interface

<b>Display</b>	4 digit	<b>Detergent missing alert</b>	Yes
<b>On/Off button</b>	Yes	<b>Cycle progress alert</b>	Yes
<b>Salt alert</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Rinse aid missing alert</b>	Yes	<b>Manual diagnostic</b>	Yes

## Construction

<b>Tank</b>	Deep drawn	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Filter</b>	3-stages filter system
<b>Back panel</b>	Galvanized	<b>Condensatore</b>	Yes
<b>Upper washing system</b>	One washing and one single rinse spray arms, stainless steel	<b>Rumorosità</b>	Lpa 51,7 dBA
<b>Lower washing system</b>	One washing and one single rinse spray arms, stainless steel	<b>Automatic opening door</b>	Yes
<b>Balanced door</b>	Yes	<b>Adjustable feet</b>	Yes
<b>Tank filter</b>	Stainless steel	<b>Drain max. height</b>	1000 mm
<b>Door gasket</b>	On 3 sides		

## Accessories Included

<b>Water supply pipe</b>	In acciaio Watermark	<b>Drain pipe</b>	Yes - 2m
--------------------------	----------------------	-------------------	----------

## Equipments


			
<b>Drain pump</b>	Yes	<b>Break tank</b>	Yes
<b>Detergent and rinse dispenser on the door</b>	Yes	<b>Door lock</b>	Yes
<b>Automatic incorporated softener</b>	Yes	<b>Detergent (red) hose length</b>	2,2 m

Wash pump soft start system Yes  
Cycle counter Yes

Rinse aid (blue) hose length 2,2 m

## Logistic Information

EAN code 8017709286392 Net weight 76,000 kg  
Packed product dimensions (WxDxH) 1050x660x790 mm Gross weight (kg) 84,000 kg

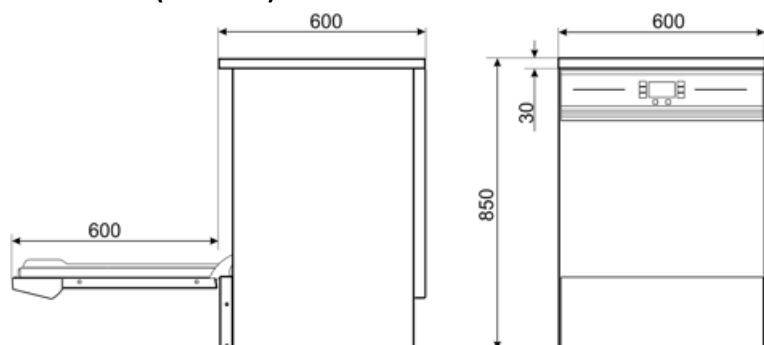

## Compatible Accessories

### AS4060

Underframe for Fresh water system dishwashers




### B6040L

Underframe for Fresh water system dishwashers




### KSLR260

Probe level kit



### KSP

Kit steam protector for SWT




### PB50D01

Basket made of polypylene for 18 plates 500x500



### PHOOS02

Basket in polypropylene for cutlery with 6 compartments



### STNBIN

Closing plint for SWT models



### T6040

Underframe for Fresh water system dishwashers



### TOP60I

Upper cover for models SWT when removing built-in panel

---

## Symbols glossary

---



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

## Benefit (TT)

---

### Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

### Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### Chemical dispenser on the door

Optimised space and simplified maintenance

The detergent and rinse aid dispenser positioned on the door optimises the internal space of the machine, reducing clutter and keeping the work area tidy. Additionally, it provides easy access for refills and maintenance without the need to open the main body of the machine.

### SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers. The design of the surfaces, with rounded corners in the tank and moulded basket guides, prevents dirt accumulation and makes cleaning the machine easier. Additionally, the moulded base directs any residue towards the filter.

### **Moulded tank**

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.