

SWT264D

Família	Máquina de lavar louça profissional
Subfamília	Máquina de lavar louça com desinfecção térmica
Tipo	Máquinas de lavar louça com sistema de água limpa
Louça	Louça; Copos; Talheres
Bomba de lavagem	Standard
Ligação energética	400 V 3N~ / 12 A / 7 kW / 50 Hz
Dimensões do produto (LxPxX)	600x600x850 mm



Mercado

Indústrias	Estabelecimentos de Cuidados
-------------------	------------------------------

Design

Cor dos LEDs	Laranja
---------------------	---------

Especificações técnicas

Fluxo da bomba de lavagem	400 L / min	Carga de enxaguamento	0,4 l/h
Temperatura pré-definida de ligação da água	5°C	Profundidade com porta aberta	1200 mm
Temperatura máxima de entrada:	60°C	Altura máxima do cesto inferior	290 mm
Dureza máxima da água	40°f - 22°dH	Diâmetro máximo de prato para o cesto superior	240 mm
Carga de detergente	1,5 l/h		

Programas

Programas	7 automatic programs
Tabela de programas	Thermodisinfection dishwasher
Configuração de programa preferida	Sim
Função repetição	Sim
Regeneration and complete drain cycle	Sim

Maximum load of dishes per cycle	70
Temperatura de enxaguamento (máx.)	93 °C
Maximum wash cycle duration with thermal disinfection	34 min
Grade of lethality of thermal disinfection (AI)	AI = 6.000 (93° C / 5') - AI = 12.000 (93° C / 10')
Maximum wash cycle duration	8 min
Maximum place settings capacity	12
Maximum place settings capacity/hour	90

Ligação elétrica

Potência do elemento de aquecimento do tanque	6400 W	Ligação eléctrica opcional	230 V 3~ / 19 A / 7 kW / 50 Hz; 220 V~ / 12 A / 2,8 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz
Potência da bomba de lavagem	400 W	Ficha eléctrica	Não
Ligação pré-definida	6800 W		

Interface

Display	4 digit	Alerta de falta de detergente	Sim
Luz indicadora On/Off	Sim	Indicador da fase do programa	Sim
Luz indicadora de falta de sal	Sim	Indicador de fim do programa	Sim
Alerta de falta de abrillantador	Sim	Diagnóstico manual	Sim

ESPECIFICAÇÕES TÉCNICAS

Cuba	Profundo	Guias dos cestos	Embutidas
Material da cuba	Aço inox AISI 304	Filtro	3-stage filter system
Painel traseiro	Porta galvanizada	Condensador	Sim
Sistema de lavagem superior	One wash and one single rinse spray arms, stainless steel	Ruído	LpA<70 dB(A)
Sistema de lavagem inferior	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.	Porta de abertura automática	Sim
Balanced door	Sim	Pés ajustáveis	Sim
Filtro da cuba	Aço inox	Altura max. de drenagem	1000 mm
Junta da porta	Em 3 lados		

Acessórios incluídos

Mangueira de abastecimento de água	Sim - 2m	Mangueira de drenagem	Sim - 2m
------------------------------------	----------	-----------------------	----------


Equipamentos



Drain pump	Sim	Contador de ciclos	Sim
Dispensador peristáltico de detergente	Controlo eletrónico	Tanque de Ruptura	Sim
Dispensador peristáltico de abrillantador	Controlo eletrónico	Tranca da porta	Sim
Sonda de nível químico	Yes, with optional kit KSL260	Comprimento da mangueira de detergente (vermelha)	2,2 m
Amaciador automático incorporado	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2 m
Sistema de arranque suave da bomba de lavagem	Sim		

Dados de logística

Código EAN	8017709281335	Peso líquido (kg)	76,000 kg
Dimensões do produto embalado (LxPxA)	660x790x1050 mm	Peso bruto (kg)	84,000 kg

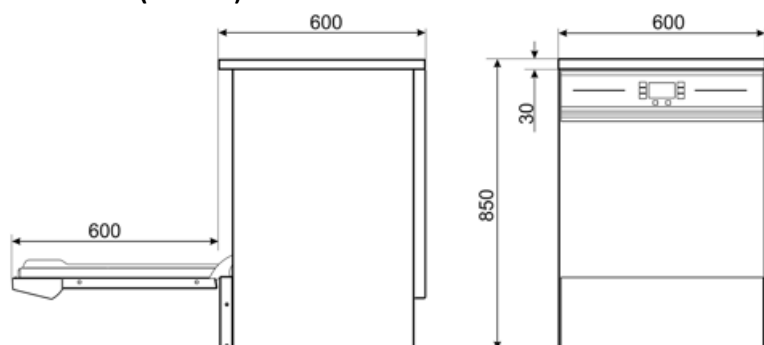

Acessórios Compatíveis

AS4060

Kit Aquastop

KSL260

Probe level kit for detergent and rinse aid H320mm




KSP

Stainless steel kit steam protector



PB50D01

Polypropylene basket for 18 plates
Ø250 mm max, dim.(WxDxH)
500x500x105 mm



STNBIN

Stainless steel front closing plinth



TOP60I

Copper cover kit when removing built-in panel



B6040L

Stainless steel closed underframe with push opening, dim. (WxDxH)
600x530x430 mm



KSLR260

Adaptor for PB50D01 and PB50G02 basket



LB16SWT

Stainless steel basket for 16 bottles



PHOOS02

6 compartment polypropylene basket for cutlery



T6040

Stainless steel frame stand, dim.
600x530x400 mm



Symbols glossary



Bloqueio de comandos: opção que permite bloquear os comandos. Muito útil para proteger as crianças.

Benefit (TT)

Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.