

SWT264M

Family Professional dishwasher

Subfamily Dishwasher with thermal disinfection

Type Washer-disinfectors
Crockery Crockery; Glasses; Cutlery

Wash pump Standard

Power connection 230 V 3~ / 30 A / 7,0 kW / 50 Hz

Product dimensions (WxDxH) 600x600x850 mm



Target

Industries Care facilities

Aesthetics

Led color Orange

Technical Features

Wash pump flow 400 L/min Depth with open door 1200 mm Min. water connection 5°C Max dish diameter 240 mm

temperature upper basket

Max. inlet temperature 60°C Max dish height lower 290 mm

Max water hardness 65°f - 36°dH basket

Programs

Programs 7 automatic programs

Program table Thermodisinfection dishwasher

Preferred program setting

Repeat Function

Regeneration and complete drain cycle

Rinse temperature (max)

Yes

Yes

93 °C

Maximum wash cycle duration with thermal 34 min

disinfection

Grade of lethality of thermal disinfection (All) $All = 6.000 (93^{\circ} C / 5') - All = 12.000 (93^{\circ} C / 10')$

Maximum wash cycle duration 8 min



Maximum place settings capacity 12
Maximum place settings capacity/hour 90

Electrical Connection

Tank heating element

power

Wash pump power

6400 W

400 W

Default connection

6800 W

Interface

Display 4 digit
On/Off button Yes
Salt alert Yes
Rinse aid missing alert Yes

Detergent missing alert Yes
Cycle progress alert Yes
End-cycle alert Yes
Manual diagnostic Yes

Construction

Tank Deep drawn

Tank material Stainless steel AISI 304

Back panel Galvanized

Upper wash system One wash and one single

rinse spray arms, stainless

steel

Lower wash system One wash and one single

rinse spray arms, stainless

steel

Balanced door Yes

Tank filter Stainless steel

Door gasketOn 3 sidesRack guidesEmbossed

Filter 3-stage filter system

Noise LpA<70 dB(A)

Automatic opening door Yes Adjustable feet Yes

Drain max. height 1000 mm

Accessories included

Water supply hose Yes - 2 m Drain hose Yes - 2 m

Equipments

ß

Drain pump Yes


Detergent and rinse Yes

dispender on the door

Automatic built softener Yes

Break tank Door lock Yes Yes



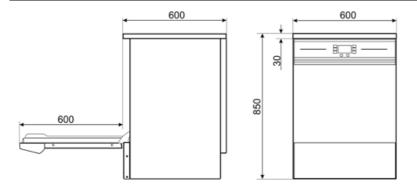



Compatible Accessories

AS4060

Kit Aquastop



B6040L

Stainless steel closed underframe with push opening, dim. (WxDxH) 600x530x430 mm

KSL260

Probe level kit for detergent and rinse



Adaptor for PB50D01 and PB50G02 basket



KSP

Stainless steel kit steam protector



LB16SWT

Stainless steel basket for 16 bottles



PB50D01

Polypropylene basket for 18 plates Ø250 mm max, dim.(WxDxH) 500x500x105 mm



PHOOS02

6 compartment polypropylene basket for cutlery



STNBIN

Stainless steel front closing plinth



T6040

Stainless steel frame stand, dim. 600x530x400 mm



TOP60I

Copper cover kit when removing built-in panel



Symbols glossary



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



THERMODESINFECTION A0=60



HTR RINSING SYSTEM



THERMO DISINFECTION



Benefit (TT)

Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Chemical dispenser on the door

Optimised space and simplified maintenance

The detergent and rinse aid dispenser positioned on the door optimises the internal space of the machine, reducing clutter and keeping the work area tidy. Additionally, it provides easy access for refills and maintenance without the need to open the main body of the machine.

SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.