# SWT264X

| | |
|---|---|
| **Tipo** | Máquinas de lavar louça com sistema de água limpa |
| **Louça** | Louça; Copos; Talheres |
| **Bomba de lavagem** | Standard |
| **Ligação energética** | 400 V 3N~ / 12 A / 7 kW / 50 Hz |
| **Dimensões do produto (LxPxA)** | 600x600x850 mm |



## Mercado

| | |
|---|---|
| **Indústrias** | Estabelecimentos de Cuidados |

## Design

| | |
|---|---|
| **Cor dos LEDs** | Laranja |

## Especificações técnicas

| | |
|---|---|
| **Fluxo da bomba de lavagem** | 400 L / min |
| **Temperatura pré-definida de ligação da água** | 5°C |
| **Temperatura máxima de entrada:** | 60°C |
| **Dureza máxima da água** | 40°f - 22°dH |
| **Carga de detergente** | 1,5 l/h |
| **Carga de enxaguamento** | 0,4 l/h |
| **Profundidade com porta aberta** | 1200 mm |
| **Altura máxima do cesto inferior** | 290 mm |
| **Diâmetro máximo de prato para o cesto superior** | 240 mm |

## Programas

| | |
|---|---|
| **Programas** | 7 automatic programs |
| **Tabela de programas** | Thermodisinfection dishwasher with drying |
| **Configuração de programa preferida** | Sim |
| **Função repetição** | Sim |
| **Regeneration and complete drain cycle** | Sim |

| | |
|---|---|
| **Temperatura de enxaguamento (máx.)** | 93 °C |
| **Maximum wash cycle duration with thermal disinfection** | 34 min |
| **Grade of lethality of thermal disinfection (A0)** | A0 = 6.000 (93° C / 5') - A0 = 12.000 (93° C / 10') |
| **Maximum wash cycle duration** | 8 min |
| **Maximum place settings capacity** | 12 |
| **Maximum place settings capacity/hour** | 90 |

## Ligação elétrica

| | |
|---|---|
| **Potência do elemento de aquecimento do tanque** | 6400 W |
| **Potência da bomba de lavagem** | 400 W |
| **Ligação pré-definida** | 6800 W |
| **Ligação eléctrica opcional** | 230 V 3~ / 19 A / 7 kW / 50 Hz; 220 V~ / 12 A / 2,8 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz |
| **Potential equalisation** | Yes |
| **Ficha elétrica** | Não |

## Interface

| | |
|---|---|
| **Display** | 4 digit |
| **Luz indicadora On/Off** | Sim |
| **Luz indicadora de falta de sal** | Sim |
| **Alerta de falta de abrilhantador** | Sim |
| **Alerta de falta de detergente** | Sim |
| **Indicador da fase do programa** | Sim |
| **Indicador de fim do programa** | Sim |
| **Diagnóstico manual** | Sim |

## ESPECIFICAÇÕES TÉCNICAS

| | |
|---|---|
| **Cuba** | Profundo |
| **Material da cuba** | Aço inox AISI 304 |
| **Painel traseiro** | Porta galvanizada |
| **Sistema de lavagem superior** | One wash and one single rinse spray arms, stainless steel |
| **Sistema de lavagem inferior** | Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável. |
| **Balanced door** | Sim |
| **Filtro da cuba** | Aço inox |
| **Junta da porta** | Em 3 lados |
| **Guias dos cestos** | Embutidas |
| **Filtro** | 3-stage filter system |
| **Condensador** | Sim |
| **Ruído** | LpA<70 dB(A) |
| **Pés ajustáveis** | Sim |
| **Altura max. de drenagem** | 1000 mm |
| **Power cable length** | 150 cm |

## Acessórios incluídos


| | |
|---|---|
| **Mangueira de abastecimento de água** | Sim - 2m |
| **Mangueira de drenagem** | Sim - 2m |

## Equipamentos

| | | | |
|---|---|---|---|
| **Drain pump** | Sim | **Sensor de condutividade** | Sim |
| **Dispensadores de detergente e abrilhantador na porta** | Sim | **Tanque de Ruptura** | Sim |
| | | **Tranca da porta** | Sim |
| **Amaciador automático incorporado** | Sim | **Comprimento da mangueira de detergente (vermelha)** | 2,2 m |
| **Sistema de secagem forçada** | Sim | | |
| **Sistema de arranque suave da bomba de lavagem** | Sim | **Comprimento da mangueira de enxaguamento (azul)** | 2,2 m |

## Dados de logística

| | | | |
|---|---|---|---|
| **Código EAN** | 8017709282073 | **Peso líquido (kg)** | 76,000 kg |
| **Dimensões do produto embalado (LxPxA)** | 660x790x1050 mm | **Peso bruto (kg)** | 84,000 kg |

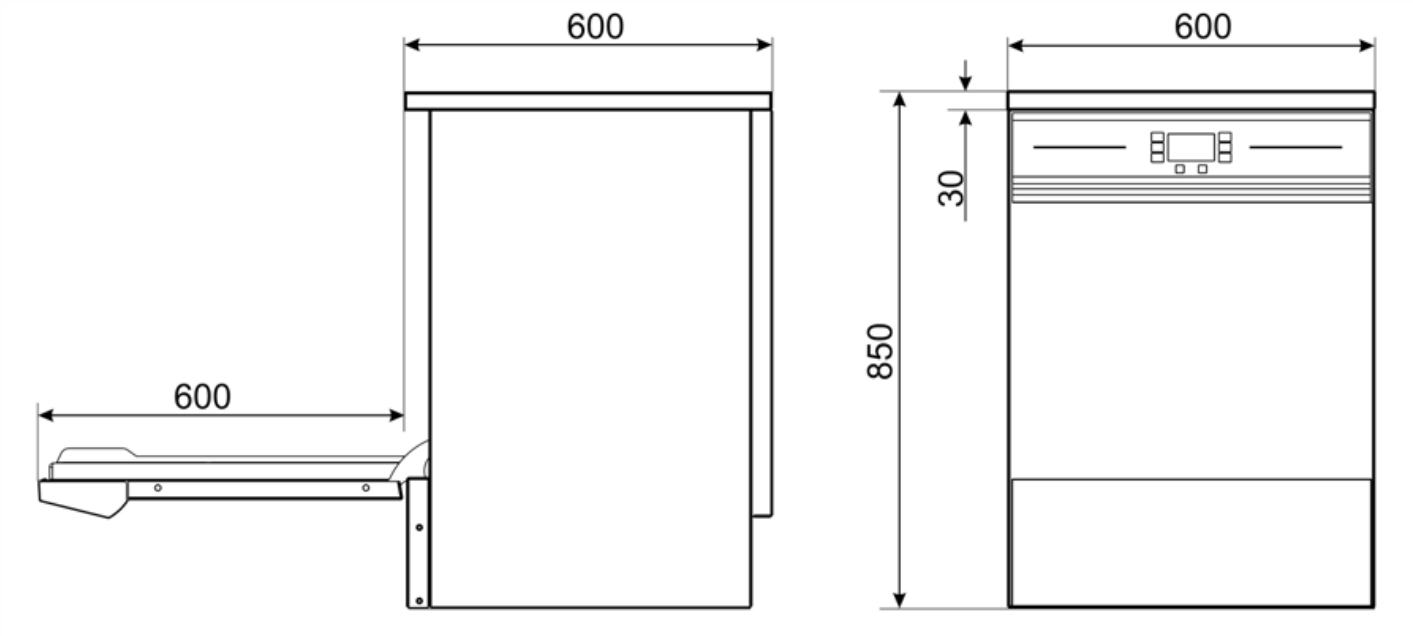

## Acessórios Compatíveis

**AS4060**

Kit Aquastop

**B6040L**



Stainless steel closed underframe with push opening, dim. (WxDxH) 600x530x430 mm

**KSL260**



Probe level kit for detergent and rinse aid H320mm

**KSLR260**




Adaptor for PB50D01 and PB50G02 basket

**KSP**




Stainless steel kit steam protector

**LB16SWT**



Stainless steel basket for 16 bottles

**PB50D01**



Polypropylene basket for 18 plates Ø250 mm max, dim.(WxDxH) 500x500x105 mm

**PHOOS02**



6 compartment polypropylene basket for cutlery

**STNBIN**



Stainless steel front closing plinth

**T6040**



Stainless steel frame stand, dim. 600x530x400 mm

**TOP60I**



Copper cover kit when removing buiilt-in panel

## Symbols glossary



Bloqueio de comandos: opção que permite bloquear os comandos. Muito útil para proteger as crianças.

# Benefit (TT)

### Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

### Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

### Drying system

Dishes always dry, ready to be used without any waiting

The integrated forced drying system ensures, at the end of the cycle, perfectly dry dishes ready for use, eliminating any trace of moisture and guaranteeing optimal results in a short time.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### Chemical dispenser on the door

Optimised space and simplified maintenance

The detergent and rinse aid dispenser positioned on the door optimises the internal space of the machine, reducing clutter and keeping the work area tidy. Additionally, it provides easy access for refills and maintenance without the need to open the main body of the machine.

## SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers.

## Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.