

SWT264XLA

Family	Professional dishwasher
Subfamily	Washer-disinfectors
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7 kW / 50 Hz



Target

Solutions	Coffee shops/Wine bars; Food retail; Health and care; Offices; Catering and Institutions
-----------	---

Aesthetics

Series	Thermal disinfection dishwasher	Led color	Orange
--------	------------------------------------	-----------	--------

Technical Features

Wash pump flow	400 L / min	Rinse load	0,4 l/h
Min. water connection temperature	5°C	Depth with open door	1200 mm
Max. inlet temperature	60°C	Max dish diameter upper basket	240 mm
Max water hardness	65°f - 36°dH	Max dish height lower basket	290 mm
Detergent load	1,5 l/h	Product dimensions WxDxH	600x600x850 mm

Programs

Programs	7 automatic programs
Program table	Thermidisinfection dishwasher with drying
Preferred program setting	Yes
Repeat Function	Yes

Regeneration and complete drain cycle	Yes
Rinse temperature (max)	93 °C
Maximum wash cycle duration with thermal disinfection	34 min.
Grade of lethality of thermal disinfection (AII)	AII = 6.000 (93° C / 5') - AII = 12.000 (93° C / 10')
Maximum wash cycle duration	8 min.
Maximum place settings capacity	12
Maximum place settings capacity/hour	90

Electrical Connection

Plug	Not present	Default connection	6800 W
Tank heating element power	6400 W	Optional electrical connection	230 V 3~ / 19 A / 7 kW / 50 Hz; 220 V~ / 12 A / 2,8 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz
Wash pump power	400 W		

Interface

Display	4 digit	Detergent missing alert	Yes
On/Off button	Yes	Cycle progress alert	Yes
Salt alert	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes

Construction

Tank	Deep drawn	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Filter	3-stage filter system
Back panel	Galvanized	Aquastop system	Yes
Upper wash system	One wash and one single rinse spray arms, stainless steel	Condensatore	Yes
		Noise	LpA<70 dB(A)
Lower wash system	One wash and one single rinse spray arms, stainless steel	Adjustable feet	Yes
		Drain max. height	1000 mm
Balanced door	Yes		
Tank filter	Stainless steel		
Door gasket	On 3 sides		

Accessories included

Water supply hose	Yes - 2m	Drain hose	Yes - 2m
-------------------	----------	------------	----------


Equipments

			
Drain pump	Yes	Wash pump soft start system	Yes

Peristaltic detergent dispenser	Electronic control	Conductivity sensor	Si
		Break tank	Yes
Peristaltic rinse-aid dispenser	Electronic control	Door lock	Yes
Chemicals level probe	Yes	Detergent (red) hose lenght	2,2m
Automatic built softener	Yes	Rinse aid (blue) hose lenght	2,2m
Forced drying system	Yes		

Logistic Information

Width packed product	660 mm	Packed product dimensions	1050X660X790
Depth packed product	790 mm	Net weight	74,000 kg
Height packed product	1050 mm	Gross weight (kg)	86,000

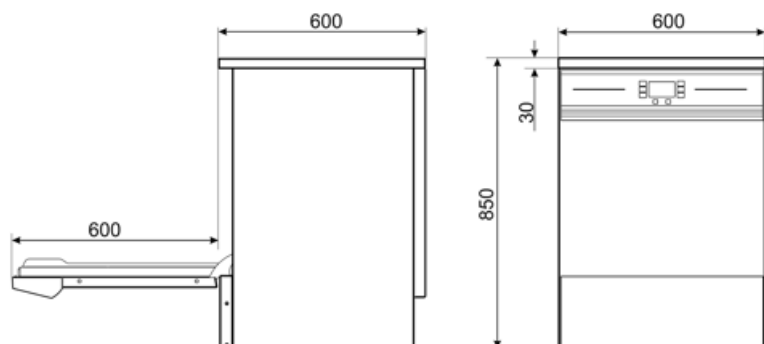

Compatible Accessories



B6040L

Closed underframe with push opening,
dim. (WxDxH) 600x530x430 mm

KSP

Kit steam protector for SWT



PHOOS02

6 compartment polypropylene basket for
cutlery




T6040

Underframe for SWT dishwashers
600x530x400 mm



KSLR260

Adaptor for PB50D01 basket



PB50D01

Polypropylene basket for 18 plates
Ø250 mm, dim. (WxDxH)
500x500x105 mm

STNBIN

Raised base for SWT models

TOP60I

Upper cover for SWT when removing
built-in panel

Symbols glossary



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



THERMODESINFECTION A0=60



HTR RINSING SYSTEM



THERMO DISINFECTION

Benefit (TT)

Door lock

Maximum safety during the thermodisinfection cycle

The door lock system prevents opening during the thermodisinfection cycle, ensuring the process runs smoothly and safely, avoiding any accidental interruptions that could compromise the effectiveness of the treatment and preventing the risk of contamination.

Repeat cycle

The Repeat function reduces consumption by reusing the water from the final rinse

The Repeat function allows the clean water from the final rinse to be reused for the next wash cycle. This feature not only reduces water consumption but also enhances process efficiency, shortening wash times without compromising hygiene or cleaning quality.

Drying system

Dishes always dry, ready to be used without any waiting

The integrated forced drying system ensures, at the end of the cycle, perfectly dry dishes ready for use, eliminating any trace of moisture and guaranteeing optimal results in a short time.

Level probes

Greater efficiency through continuous monitoring of chemicals

The connection of the level probes for the chemicals ensures constant monitoring of the detergent and rinse aid levels, preventing the risk of sudden depletion of the products. This feature enhances the machine's efficiency, reducing waste and maximising the use of consumables, with benefits for operational costs and quality.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

SWT

Designed to ensure the highest standards of hygiene and cleanliness

These appliances are designed to ensure high standards of hygiene and cleanliness. The thermodisinfection programmes with a 93°C rinse achieve A0 levels of up to 12000, which cannot be reached by traditional professional dishwashers.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

The tank, featuring rounded corners and integrated basket guides, is designed to prevent dirt build-up and make cleaning the machine quick and easy. The moulded base also helps direct any residue towards the filter, ensuring high levels of hygiene and consistently thorough cleaning.