

TR93IBL

Cooker size N. of cavities with energy label Cavity heat source Hob type Type of main oven Type of second oven Cleaning system main oven EAN code Energy efficiency class Energy efficiency class, second cavity 90x60 cm 2 Electric Induction Thermo-ventilated Vapor Clean 8017709196790 A B



Aesthetics

Aesthetics Design Colour Command panel finish Logo Logo position Upstand Hob colour Control knobs	Victoria Victoria Black Enamelled metal assembled 50's Upstand+ Command panel Yes Black enamel Smeg Victoria	Controls colour No. of controls Serigraphy colour Display Door Glass type Handle Handle Colour Plinth	Stainless steel 9 Silver electronic 5 buttons With frame Black Smeg Victoria Brushed stainless steel Anthracite
Programs / Funct No. of cooking functions Traditional cooking func		8	
Static	Circulaire		(circulaire + bottom + upper +
ECO ECO Fan grill (large)	Small grill 🛞 Fan assisted		Large grill



Other functions



Defrost by time

Cleaning functions



Vapor Clean

Programs / Functions Auxiliary Oven

Cooking functions cavity 2 Traditional cooking functions, cavity 2 1

Circulaire

Programme / Functions Third Oven

No. of functions	third	oven
Oven light		

1
:0:
×.

Full grill

Hob technical features



Total no. of cook zones 5

Front left - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 18.0 cm Rear left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Central - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 27.0 cm

Rear right - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 18.0 cm

Front right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Induction - single
Automatic switch off Yes

when overheat Automatic pan detection

Yes

Minimum pan diameterYesindicationSelected zone indicatorYes

Main Oven Technical Features

💷 🗵 🚑 💭			
No. of lights	1	Removable inner door	Yes
Fan number	1	Total no. of door glasses	3
Net volume of the cavity	61 litres	No.of thermo-reflective	1
Gross volume, 1st cavity	701	door glasses	
		Safety Thermostat	Yes
Cavity material	Easy clean enamel	Usable cavity space	316x460x412 mm
Shelf positions	4	dimensions (HxWxD)	



Type of shelves Light type Light power Cooking time setting Door opening Removable door Full glass inner door Metal racks Halogen 40 W Start and Stop Side opening Yes Yes

Temperature control	Electro-mechanical
Lower heating element	1200 W
power	
Upper heating element -	1000 W
Power	
Grill elememt	1700 W
Large grill - Power	2700 W
Circular heating element	2000 W
- Power	
Grill type	Electric
Tilting grill	Yes

Options Main Oven

Timer	Yes	Minimum Temperature	50 °C
End of cooking acoustic alarm	Yes	Maximum temperature	260 °C

Second Oven Technical Features

<u>5211</u> 🖳 🐖 💭			
Net volume of the	62 litres	Full glass inner door	Yes
second cavity		Removable inner door	Yes
Gross volume, 2nd	69 I	No. total door glasses	2
cavity		No. thermo-reflective	1
Cavity material	Easy clean enamel	door glasses	
Shelf positions	9	Safety Thermostat	Yes
Type of shelves	Metal racks	Cooling system	Tangential
No. of lights	1	Usable cavity space	605x275x370 mm
Light type	Halogen	dimensions (HxWxD)	
Light power	40 W	Temperature control	Electro-mechanical
Door opening	Side opening	Circular heating element	2500 W
Removable door	Yes	- Power	
		Grill type	Electric

Options Auxiliary Oven

2

Metal racks

Minimum Temperature	50 °C	Maximum temperature	245 °C
Third Oven Techn	ical Features		
500 📃 🔁 🔊 💭			
Net volume, 3rd cavity	361	Removable inner door	Yes
Gross volume, 3rd	41 I	No. total door glasses	3
cavity		No. of thermo-reflective	1
Cavity material	Easy clean enamel	door glasses	

Safety Thermostat

Cooling system

Yes

Tangential

Shelf positions

Type of shelves



No. of lights Light type	1 Halogen	Usable cavity space dimensions (HxWxD)	169x440x443 mm
Light power	40 W	Temperature control Large grill - Power	Electro-mechanical 2700 W
Door opening Removable door	Flap down Yes	Grill type	Electric
Full glass inner door	Yes	Tilting grill	Yes

Options Third Oven

Minimum Temperature	50 °C	Maximum temperature	260 °C
Accessories inclu	ded for Main Oven	& Hob	

Rack with back and side	2	Grill mesh	1
stop		Telescopic Guide rails,	1
40mm deep tray	1	partial Extraction	

Accessories included for Secondary Oven

Chrome shelf with back stop	4	Plate rack/warmer	1


Accessories included for Third Oven

Rack with back and side 1	40mm deep tray	1
stop		

Electrical Connection

Max Power Draw Current	19400 W 52 A	Power supply cable length	150 cm
Voltage	220-240 V	Frequency	50/60 Hz 5 poles
Voltage 2 (V)	380-415 V	Terminal block	








Not included accessories

AIRFRY



GTP

Partially extractable telescopic guides (1 level) Extraction: 300 mm Material: Stainless steel AISI 430 polished



BNP608T

Teflon-coated tray, 8mm depth, to be placed on the grid



KIT1TR9N

Splashback, 90x75 cm suitable for TR9 Victoria cookers, black



SFLK1 Child lock

PRTX

Refractary pizza stone with handles. D=35cm Not suitable for microwave ovens. Suitable for gas ovens, to be put on the griddle.

GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

BN620-1

Enamelled tray, 20mm deep



SCRP

Induction and ceramic hobs and teppanyaki scraper

BBQ

Double sided plate BBQ. Suitable for recreating succulent and crispy dishes in the oven with the typical taste of grilled cooking. The ribbed side is particularly suitable for meats and cheeses. The smooth side for fish, seafood and vegetables.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



KITH93

Height extension kit (950 mm), suitable for TR93 cookers

STONE



Rectangular refractory stone. Ideal for cooking pizzas with the same results as a typical wood-fired oven. Can also be used for baking bread, focaccias and other recipes such as pies, flans or biscuits Dimensions:L42 x H1,8 x P37,5 cm.

PALPZ

Pizza shovel with fold away handle width: 315mm length : 325mm







GTT



Totally extractable telescopic guides (1 level) Extraction: 433 mm Material: Stainless steel AISI 430 polished

BN640

Enamelled tray, 40mm deep




SMOLD



Set of 7 silicone moulds for ice creams, ice lollies, pralines, ice cubes or to portion food. Usable from -60°C to +230°C

.se•smeg

Symbols glossary

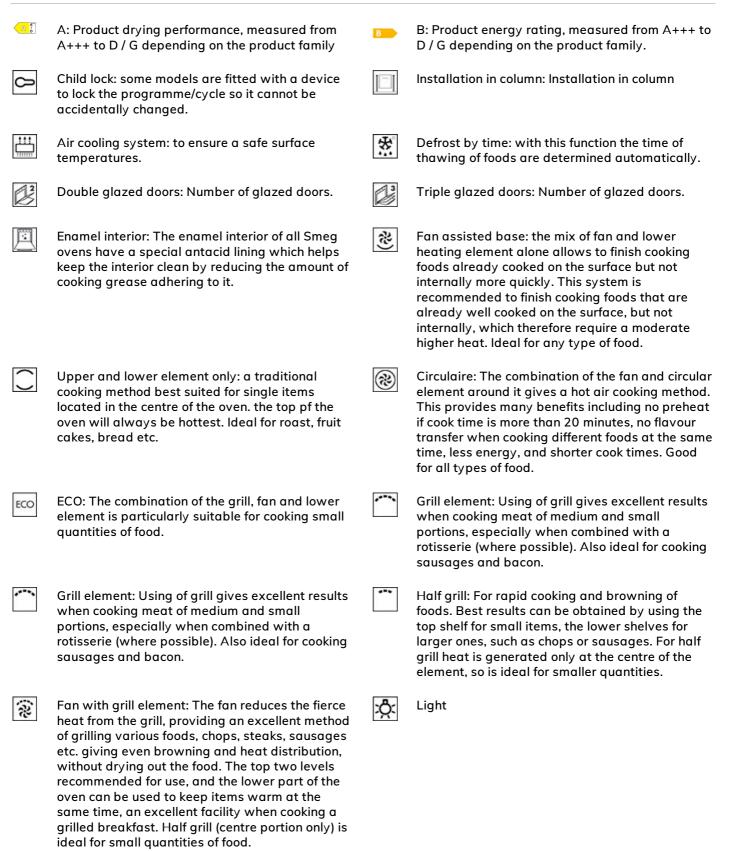

ssesseg

	Circulaire with upper and lower elements: The use of the fan with both elements allows food to be cooked quickly and effectively, ideal for large joints that require thorough cooking. It offers a similar result to rotisserie, moving the heat around the food, instead of moving the food itself, enabling any size or shape to be cooked.	STOP ℃∓	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
() ()	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.	旦	All glass inner door: All glass inner door, a single flat surface which is simple to keep clean.
H	The inner door glass: can be removed with a few quick movements for cleaning.	0	Side lights: Two opposing side lights increase visibility inside the oven.
	Warming up: An option for dish warming and keeping the prepared meals hot.	.2	The oven cavity has 2 different cooking levels.
.4	The oven cavity has 4 different cooking levels.	.9	The oven cavity has 9 different cooking levels.
	Telescopic rails: allow you to pull out the dish and check it without having to remove it from the oven entirely.	ŝ	Electronic control: Allows you to maintain temperature inside the oven with the precision 2- 3 ° C. This enables to cook meals that are very sensitive to temperature changes, such as cakes, souffles, puddings.
	Tilting grill: the tilting grill can be easily unhooked to move the heating element and clean the roof of the appliance in one simple step.	۷	Vapor Clean: a simple cleaning function using steam to loosen deposits in the oven cavity.
36 It	The capacity indicates the amount of usable space in the oven cavity in litres.	61 R	The capacity indicates the amount of usable space in the oven cavity in litres.
62 lt	The capacity indicates the amount of usable space in the oven cavity in litres.		



Benefit

True-convection

The best cooking performances guaranteed by ventilated circular flow.

Multiple fans and heating elements guarantee the perfect aerodynamic heat flow, allowing homogeneous and quicker cooking inside the cavity.

Induction hob

Induction offers fast cooking and precise temperature control

Through the use of suitable cookware, induction is easy to use and maintain, safe and responsive

Vapor Clean

By inserting water into a recess at the bottom of the cavity, steam is generated, which softens the residue and facilitates its removal

By inserting water into a recess at the bottom of the cavity, steam is generated, which softens the residue and facilitates its removal.

Single turbine

The oven has a fan equipped with a circular heating element allowing cooking with rotating heat

Isothermic Cavity

The best cooking performance at the highest energy efficiency

Multilevel halogen light

Internal halogen lighting on different levels guarantees excellent visibility

Buttons control

Easy and intuitive timer setting with a simple buttons

Telescopic guides

Easy extraction and safe insertion of trays into the oven thanks to telescopic guides

Adjustable height

Cooker top flushed with the working area thanks to adjustable feet

Removalble inner glass

Internal door glasses are easily removable for complete cleaning

Multilevel cooking

Several cooking levels allow maximum flexibility of use



Cold door

During any function, the external door glass is cold, avoiding any risk of burns

AirFry (AIRFRY optional accessory)

Lighter and tastier food thanks to airfry basket

BBQ (optional accessory)

Barbeque cooking directly in the oven with the double-sided grill

Pizza stone (optional accessory)

Baking with refractory stone for soft and crispy pizza and yeast products (STONE optional accessory)