

UD526DS

Family	Professional dishwasher
Subfamily	Traywasher
Basket dimensions	500x500 mm
Panel	Topline
Filter	5-stages filter system
Rinse pump H.T.R. system	Yes
Usable load height	400 mm
Power connection	400 V 3N~ / 12 A / 6,7 kW / 50 Hz
Depth with open door	1020 mm
Product dimensions WxDxH	600x675x822 mm



Target

Solutions	Bakery/Pastry making; Frozen bakery industry; Food retail; Other food industry; QSR
-----------	--

Aesthetics

Series	Topline	Led color	White
Control panel	touch screen		

Functions



Functionality	A0 = 30; A0 = 60; GN 1/1 trays washing; 5-stage filter; HTR; Door clearance 400mm
---------------	--

Programs

Programs	13 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle

Program specifications

Boiler 85°C / Vasca 70°C - 45'20"; Boiler 85°C / Vasca 70°C - 50'20"; Boiler 71°C/Tank 60°C - 50"; Boiler 71°C/Tank 60°C - 60"; Boiler 85°C/Tank 60°C - 1'10"; Boiler 85°C/Tank 60°C - 2'; Boiler 85°C/Tank 60°C - 4'; Boiler 71°C/Tank 60°C - 1'10"; Boiler 71°C/Tank 60°C - 2'10"; Boiler 85°C/Tank 60°C - 4'10"; Boiler 24°C/Tank 60°C - 4'; Boiler 85°C/Tank 60°C - 7'10"

Drain and self cleaning cycle

Yes

Maximum basket/hour

72

Maximum dishes/hour

1296

Interface

Display TFT

On/Off button Yes

Salt alert Yes

Rinse aid missing alert Yes

Detergent missing alert Yes

Cycle progress alert Yes

End-cycle alert Yes

Manual diagnostic Yes

Construction

Tank Deep drawn
Construction Double wall
Tank material Stainless steel AISI 304
Back panel Galvanized
Door Double wall
Balanced door Yes
Tank filter Stainless steel
Washing spray arm 2 in stainless steel
Rinse spray arm 2 in stainless steel

Door gasket On 3 sides
Rack guides Embossed
Tank capacity 11 l
Boiler capacity 6,5 l
Protection class IPX4
Adjustable feet Yes
Net weight 70,000 kg
Drain max. height 600 mm

Technical Features

Tank heating element 2000 W
Boiler heating element 6000 W
Washing pump 700 W
Default connection 6700 W
Water cycle consumption 3,2 l

Warm water connection 8°C
Max temperature inlet water 60°C
Max water hardness 54°F - 30°dH
Inlet pressure 100-600 kPa

Electrical Connection

Plug Not present


Optional electrical connection 230 V 3~ / 19 A / 6,7 kW / 50 Hz; 230 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 16 A / 3,7 kW / 50 Hz; 230 V~ / 21 A / 4,7 kW / 50 Hz

Equipments

Drain pump	Yes	Rinse load	0,4 l/h
Peristaltic detergent doser	Electronic control	Cycle counter	Yes
Peristaltic rinse-aid doser	Electronic control	Break tank	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Automatic incorporated softener	Yes	Trays washing option GN1/1 530x325mm	Yes
Thermostop system	Yes	Water supply pipe diameter	DN15 - ½"
Soft Start system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Stand-by system	Yes	Detergent (red) hose lenght	2,2m
Automatic start	Yes, default OFF	Rinse aid (blue) hose lenght	2,2m
Detergent load	1,5 l/h		

Accessories Included

Dish basket	1x PB50D01	Tray basket	1x WB50T03
Cutlery basket	1x PHOOS02	Water supply hose	Yes - 2m
Flat basket	1x PB50G01	Drain hose	Yes - 2m

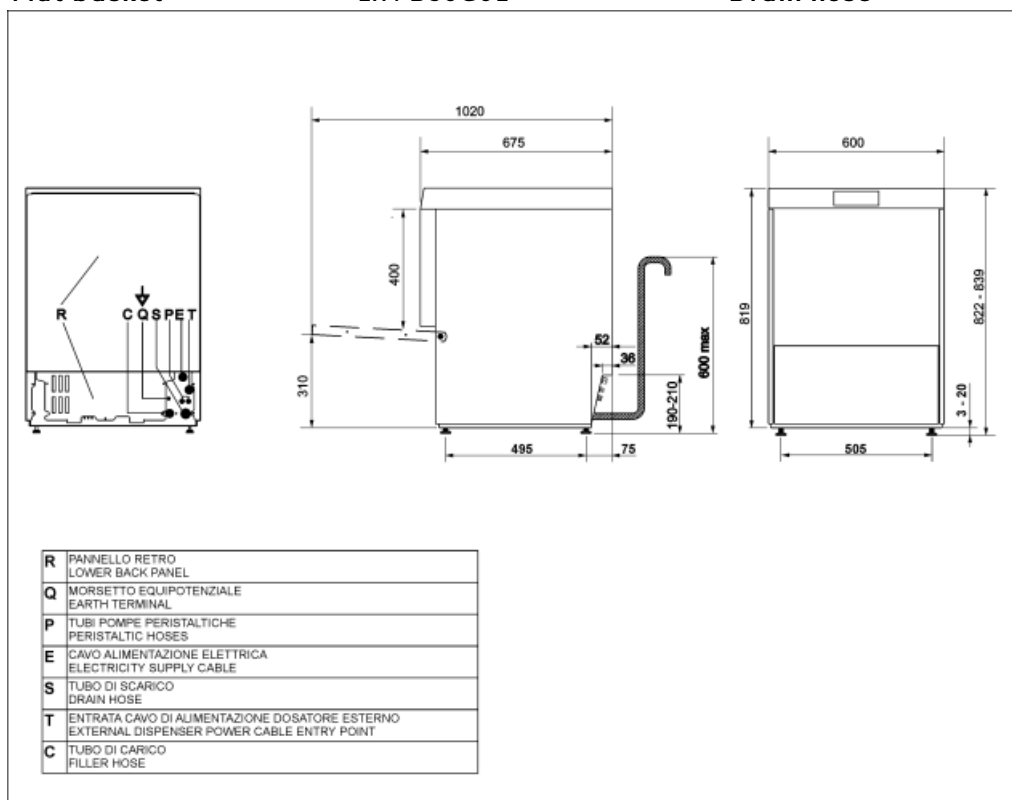

Not included accessories

WB50PG5

Wire basket for no. 25 plastic glasses with flat bottom, 500x500x260 mm

WH00S01

Wire insert for 12 small dishes

PHOOS01

Polypropylene single basket for cutlery

WB50G01

Universal wire basket with flat bottom, 500x500x123 mm

WB50G02

Wire basket for 90 mm diameter max glasses with sloped bottom, 500x500x170 mm

PB50G01

Universal polypropylene basket, 500x500x100 mm

PHOOS02

6 compartments polypropylene basket for cutlery

WB50G03

Wire basket for 72 mm diameter glasses with inclined bottom, 500x500x235 mm

KITSONLIV

Probe level kit for double wall models

WB60T03

Wire basket for 5 trays dim.600x400 mm, 600x500 mm

WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, 500x500 mm

PB50D01

Polypylene basket for 18 plates, 500x500x105 mm

KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for dishwashers and glasswashers 500 double wall

WB50G04




Wire basket for glasses 135 mm diameter max, with sloped bottom, 500x500x170 mm

WB50D01

Wire basket for 18 dishes 250 mm max. diameter or self service trays, 500x500 mm

WS5

Underframe for glasswashers 500mm



Symbols glossary (TT)



THERMODESINFECTION A0=30



THERMODESINFECTION A0=60



SUITABLE FOR GASTRONORM TRAY



HTR RINSING SYSTEM



5 STAGE FILTER



MAX. USABLE HEIGHT 400mm