

UDA515-1

Family	Dishwasher
Subfamily	Undercounter Dishwasher
Basket dimensions	500x500 mm
Panel	Easyline 2016
Filter	5-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Simultaneous heating	Yes
Usable load height	415 mm
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Depth with open door	1020 mm
Product dimensions WxDxH	600x600x820 mm



Aesthetics

Control panel	Electronic	Led color	Green
---------------	------------	-----------	-------

Functions



Functionality	GN 1/1 trays washing; 5-stage filter; HTR; Door clearance 415mm
---------------	---

Programs

Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 85°C/Tank 60°C-60"; Boiler 71°C/Tank 60°C-1'20"; Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-3'; Boiler 71°C/Tank 60°C-2'10"; Boiler 85°C/Tank 60°C-4'10"
Drain and self cleaning cycle	Yes
Maximum basket/hour	51
Maximum dishes/hour	918

Interface

Display	8 digit	Detergent missing alert	Yes
Number of buttons	5	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes

Construction

Tank Construction	Deep drawn Double wall	Rinse spray arm	Stainless steel
Tank material	Stainless steel AISI 304	Door gasket	On 3 sides
Back panel	Galvanized	Rack guides	Embossed
Door	Double wall	Tank capacity	11 l
Balanced door	Yes	Boiler capacity	6 l
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	Stainless steel	Net weight	60,000 kg
		Drain max. height	600 mm

Technical Features

Tank heating element	2000 W	Water inlet	8°C
Boiler heating element	6100 W	Max temperature inlet water	60°C
Washing pump	700 W	Max water hardness	12°F - 7°dH
Default connection	7300 W	Water inlet	Cold 15°C
Water cycle consumption	3,2 l		

Electrical Connection


Electrical connection option	230 V 3~ / 15 A / 5,2 kW / 50 Hz; 220 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 13 A / 2,9 kW / 50 Hz; 230 V~ / 17 A / 3,7 kW / 50 Hz
------------------------------	--

Equipments

Drain pump	Yes	Break tank	Yes
Peristaltic detergent doser	Yes, electronic control	Partial renewal of water in the tank and built-in drain pump	Si
Peristaltic rinse-aid doser	Yes, electronic control	Trays washing option GN1/1 530x325mm	Yes
Chemicals level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Default chemicals dosing unit of measure	gr/lit	Drain supply pipe diameter	21,5 mm
Boiler thermostop	Yes default ON	Peristaltic detergent doser	Yes, manual
Stand-by system	Yes	Peristaltic detergent doser	Yes, manual
Automatic start	Yes, default OFF		

Accessories Included

Dish basket	PB50D01	Water supply pipe	Yes - 2m
-------------	---------	-------------------	----------

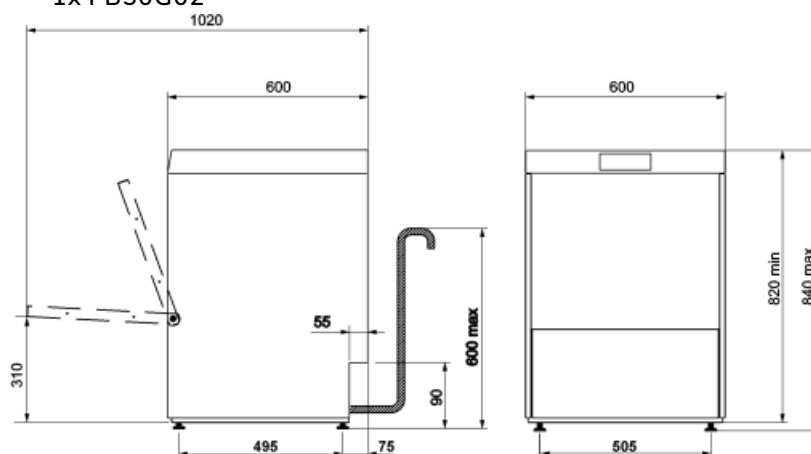

Not included accessories



KITSONLIV
Probe level kit



PHOOS01
Single basket in polypropylene for cutlery



WB50G01
Universal wire basket with flat bottom 500x500



KITDETKCC500
Kit for detergent (1l) and rinse storage (1l) for dishwashers 500x500



WB50G04
Wire basket for glasses with inclined bottom 500x500



WB50G03
Wire basket for glasses with inclined bottom 500x500



WH00S01
Wire insert for 12 small dishes



WB50T02
Wire basket for 5 trays 600x500



WB50G02
Wire basket for glasses with inclined bottom 500x500



PB50G01
Universal basket in polypropylene 500x500



PHOOS02
Basket in polypropylene for cutlery with 6 compartments



WS5
Underframe for glasswashers 500mm

Symbols glossary (TT)



...



...



...



5 STAGE FILTER