

UG400DMR

Família	Máquina de lavar louça profissional
Subfamília	Undercounter glasswashers
Line	Ecoline a pulsanti
Dimensões do cesto	Diâmetro 400 mm
Wash pump	Standard



Acessórios incluídos

Cesto para talheres	1x PHOOS01	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	2x RB40G01	Outros cestos e acessórios	1x RB40A3
Mangueira de abastecimento de água	Sim - 1,5m		

Mercado

Soluções	Bares/ Coffee shops/ Wine bars
----------	--------------------------------

Programas

Programs	2 automatic programs; Self-cleaning programs
Program specifications	Caldeira 85°C/Cuba 60°C - 2'30"; Caldeira 85°C/Cuba 60°C - 1'30"
Numero máximo de cestos/hora	40

Interface

Numero de botões	4	Luz indicadora On/Off	Sim
------------------	---	-----------------------	-----

ESPECIFICAÇÕES TÉCNICAS

Tank	Pofundo	Guias dos cestos	Embutidas
Tipologia	Parede dupla parcial		

Material da cuba	Aço Inox AISI 304	Hood elevation system	Manual
Painel traseiro	Porta galvanizada	Filter	5-stage filter system
Sistema de lavagem superior	One wash and one split rinse spray arms, stainless steel	Capacidade da cuba	7 l
Sistema de lavagem inferior	One wash and one combined rinse spray arms, stainless steel and plastic	Capacidade da caldeira	4,5 l
Filtro da cuba	Plástico	Classe de Proteção	IPX4
Junta da porta	Apenas para cima	Adjustable feet	Sim
		Altura max. de drenagem	600 mm

Especificações técnicas


Tank heating element power	2000 W	Dureza máxima da água	12°F - 7°dH
Boiler heating element power	2700 W	Pressão de entrada	2,5-6 bar / 250-600 kPa
Wash pump power	290 W	Carga de detergente	1,5 l/h
Ligação pré-definida	3000 W	Carga de enxaguamento	0,4 l/h
Water consumption per cycle	3 l	Altura de carga operável	309 mm
Temperatura pré-definida de ligação da água	5°C	Profundidade com porta aberta	882 mm
Max. inlet temperature	60°C	Dimensões de produto LxPxA:	440x530x670 mm

Ligação elétrica

Ficha elétrica	(F;E) Schuko	Ligação energética	230 V~ / 13 A / 3,0 kW / 50 Hz
-----------------------	--------------	---------------------------	--------------------------------

Equipamentos

Bomba de drenagem	Sim	Wash pump soft start system	Sim
Peristaltic detergent dispenser	Manual	Renovação parcial da água na cuba e bomba de drenagem integrada	Sim
Peristaltic rinse-aid dispenser	Manual	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Unidade de medida da dosagem de produtos químicos	gr/lt	Ø do tubo de drenagem	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Comprimento da mangueira de detergente (vermelha)	2,2m
Wash tank Thermostop system	Yes	Comprimento da mangueira de enxaguamento (azul)	2,2m

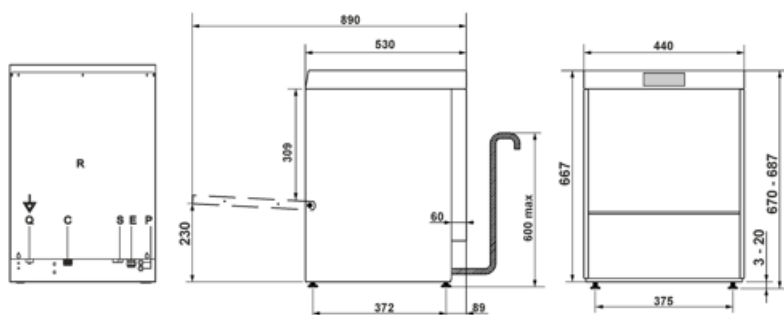

R	Pannello retro	Lower back panel
Q	Morsetto equipotenziale	Earth terminal
C	Tubo di carico	Filler hose
S	Tubo di scarico	Drain hose
P	Tubi pompe peristaltiche	Peristaltic hoses
E	Cavo alimentazione elettrica	Electricity supply cable

Acessórios Compatíveis



KITRB40G01

Kit of 2 wire round baskets and adaptor for Ecoline



PHOOS01

Polypropylene single basket for cutlery



PHOGR4

Glass insert for 400x400 mm basket



PHOOS02

6 compartment polypropylene basket for cutlery



RB40A3

Adapter for round basket for all glasswasher models 460 mm wide



RB40G01

Universal wire basket with flat bottom, dim. (ØxH) 400x140 mm



WB40D01

Wire basket for 8 dishes Ø315 mm, dim. 400x400 mm



WB40G01

Universal wire basket with flat bottom, dim (WxDxH) 400x400x120 mm



WB40G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 400x400x168 mm



WB40G03

Sloped bottom 3 compartments wire basket for glasses Ø120 mm max, dim. (WxDxH) 400x400x168 mm



WB40PG4

Wire basket for plastic glasses, dim. (WxDxH) 400x400x210 mm



WH00S01

Wire insert for 12 small dishes



WS4

Stainless steel underframe for glasswashers, dim. (WxDxH) 495x530x490 mm

Symbols glossary



4 STAND FILTER



MAX.USABLE HEIGHT 309mm

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Partial double-skin

Optimised thermal and acoustic insulation

The Ecoline undercounter dishwashers are equipped with a partial double-skin structure that optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Round basket

Versatile solution for bars and cafés

This machine is equipped with a round basket designed to fit perfectly into the sinks of bars, cafés, and bistros, offering maximum versatility for all types of workspaces. Thanks to its compact and functional design, it integrates seamlessly into professional environments, optimising washing operations without compromising efficiency. Ideal for those looking for a practical solution that adapts to varying space requirements.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.