

UG405D

Familie	Afwasmachine
Subfamilie	Undercounter glasswashers
Korf afmetingen	400x400 mm
Rinse pump	HTR system



Meegeleverde accessoires

Bestek mand	PHOOS01	Toevoerslang	Ja - 1,5m
Vlakke korf	2x PB40G01	Afvoerpip	Ja - 2,2m

Target

Solutions	Coffee shops/Wine bars
-----------	------------------------

Programs

Program specifications	8- 85°C / 60°C - 2' 30"; 10- 85°C / 60°C - 4'; 5- 85°C / 60°C - 1' 30"
Max korven/uur	40

Interface

Aantal knoppen	5	Handmatige diagnose	Ja
Aan/uit knop	Ja		

Construction

Tank	With printed base	Korf geleiders	Reliëf
Construction	Enkelwandig	Filter	5-stages filter system
Tank materiaal	Roestvrij staal AISI 304	Tank volume	8 l
Achterwand	Gegalvaniseerd	Boiler volume	4 l
		Protection class	IPX4

Tank filter	Kunststof	Maximale hoogte water afvoer	600 mm
Deur pakking	Alleen boven		

Technische specificaties


Tank heating element power	2000 W	Maximale water hardheid	12°f - 7°dH
Boiler heating element power	4300 W	Water invoer	Koud 15°C
Washing pump power	290 W	Peristaltische naspoelpomp	Ja, handmatig
Standaard aansluiting	4600 W	Peristaltische naspoelpomp	Ja, handmatig
Electrische aansluiting	2,3 l	Bruikbare ruimte in hoogte	330 mm
Water invoer	Koud 15°C	Diepte open deur	882 mm
Maximale temperatuur water invoer	60°C	Product dimensions	440x530x710 mm
		WxDxH	

Elektrische aansluiting

Electrische aansluiting	400 V 3N~ / 10 A / 4,6 kW / 50 Hz	Electronische aansluiting	230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 21 A / 4,6 kW / 50 Hz
--------------------------------	-----------------------------------	----------------------------------	---

Equipments

Peristaltische zeppomp	Ja, electronisch geregeld	Breaktank	Ja
Peristaltische naspoelpomp	Ja, electronisch geregeld	Partial renewal of water in the tank and built-in drain pump	Ja
Chemie dosering	gr/lt	Diameter toevoerslang	Ja - 1,5m
Boiler thermostop	Yes - default	Diameter afvoerslang	Ja - 2,2m
Soft Start system	Ja	Peristaltische zeppomp	handmatig
Automatische start	Ja, standaard uitgeschakeld	Peristaltische zeppomp	handmatig
Cycle counter	Ja		

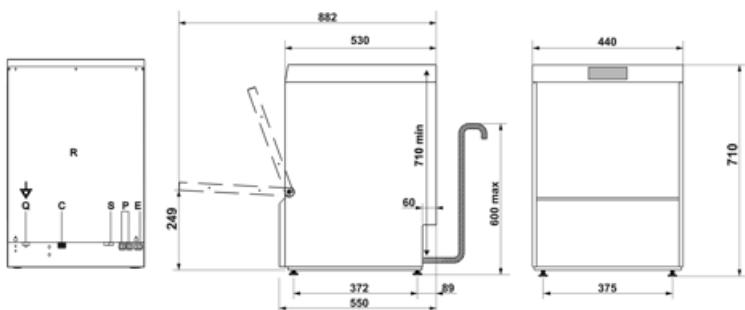

O	MORSETTO EQUIVOLONTIALE EARTH TERMINAL
E	CAVO DI ALIMENTAZIONE ELETTRICA POWER SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

Compatibile Accessoires

KITRB40G01

Kit of 2 wire round baskets and adaptor
for Ecoline



PHOOS02

6 compartments polypropylene basket
for cutlery



WH00S01

Wire insert for 12 small dishes



PHOOS01

Polypropylene single basket for
cutlery

RB40A3

Adapter for round basket for single
wall models

WS4

Stainless steel underframe for
glasswashers, dim. (WxDxH)
495x530x490 mm

Symbols glossary



HTR RINSING SYSTEM



5 STAGE FILTER



MAX.USABLE HEIGHT 330mm

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.