

# UG405DR

Product Family	Dishwasher
Subfamily	Undercounter glasswashers
Basket dimensions	Diameter 400 mm
Rinse pump	HTR system



## Accessories Included

Cutlery basket	PHOOS01	Drain pipe	Yes - 2m
Flat basket	2x RB40G01	Other basket and accessory	1x RB40A3
Water supply pipe	Yes - 1.5m		

## Target

Potential users	Bars/Cafes
-----------------	------------

## Programmes

Program specifications	Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C-4'; Boiler 85°C/Tank 60°C-1'30"
Maximum baskets/hour	40

## Interface

Number of buttons	5	Manual diagnostics	Yes
On/off indicator	Yes		

## Construction

Tank	With printed base	Rack guides	Embossed
Construction	Single skinned	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	8 l
Back panel	Galvanized	Boiler capacity	4 l

<b>Door</b>	Double skinned	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Plastic	<b>Drain max. height</b>	600 mm
<b>Door gasket</b>	Top only		

## Technical Features


<b>Tank heating element power</b>	2000 W	<b>Max water hardness</b>	12°f - 7°dH
<b>Boiler heating element power</b>	4300 W	<b>Water inlet pressure</b>	1-6 bar / 100-600 kPa
<b>Washing pump power</b>	290 W	<b>Detergent flow rate</b>	1.5 l/h
<b>Default connection</b>	4600 W	<b>Rinse aid flow rate</b>	0.4 l/h
<b>Water consumption per cycle</b>	2,3 l	<b>Usable load height</b>	330 mm
<b>Warm water connection</b>	Cold 15°C	<b>Depth with door open</b>	882 mm
<b>Inlet water maximum temperature</b>	60°C	<b>Dimensions</b>	440x530x710 mm

## Electrical Connection

<b>Default power supply</b>	400 V 3N~ / 10 A / 4,6 kW / 50 Hz	<b>Electrical connection options</b>	230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 21 A / 4,6 kW / 50 Hz
-----------------------------	-----------------------------------	--------------------------------------	---

## Equipment

<b>Peristaltic detergent pump</b>	Yes, electronic control	<b>Break tank</b>	Yes
<b>Peristaltic rinse aid pump</b>	Yes, electronic control	<b>Partial water exchange in the wash tank via built-in drain pump</b>	Yes
<b>Chemical dosing</b>	gr/lit	<b>Water supply pipe diameter</b>	16 mm
<b>Boiler thermostat</b>	Yes - default	<b>Drain supply pipe diameter</b>	21.5 mm
<b>Soft Start</b>	Yes	<b>Detergent (red) hose length</b>	Yes, manual
<b>Automatic start</b>	Yes	<b>Rinse aid (blue) hose length</b>	Yes, manual
<b>Cycle counter</b>	Yes		

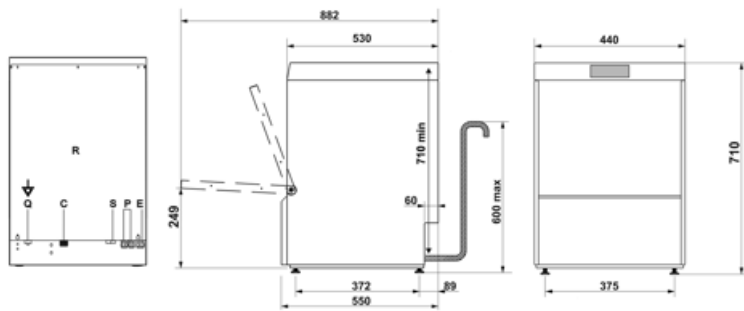

O	MORSETTO EDIVPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

---

## Not included accessories

---

**KITRB40G01**

Adapter for round basket



**PHOOS01**

Single basket in polypropylene for cutlery



**PHOOS02**

Basket in polypropylene for cutlery with 6 compartments

**RB40A3**

Adapter for round basket



**WH00S01**

Wire insert for 12 small dishes



**WS4**

Underframe for glasswasher 400mm

