

# UG405DR

<b>Familie</b>	Afwasmaschine
<b>Subfamilie</b>	Undercounter glasswashers
<b>Korf afmetingen</b>	Diameter 400 mm
<b>Rinse pump</b>	HTR system



## Meegeleverde accessoires

<b>Bestek mand</b>	PHOOS01	<b>Afvoerpijp</b>	Ja - 2,2m
<b>Vlakke korf</b>	2x RB40G01	<b>Korven en accessoires</b>	1x RB40A3
<b>Toevoerslang</b>	Ja - 1,5m		

## Target

<b>Solutions</b>	Coffee shops/Wine bars
------------------	------------------------

## Programs

<b>Program specifications</b>	8- 85°C / 60°C - 2' 30"; 10- 85°C / 60°C - 4'; 5- 85°C / 60°C - 1' 30"
<b>Max korven/uur</b>	40

## Interface

<b>Aantal knoppen</b>	5	<b>Handmatige diagnose</b>	Ja
<b>Aan/uit knop</b>	Ja		

## Construction

<b>Tank</b>	With printed base	<b>Korf geleiders</b>	Reliëf
<b>Construction</b>	Enkelwandig	<b>Filter</b>	5-stages filter system
<b>Tank materiaal</b>	Roestvrij staal AISA 304	<b>Tank volume</b>	8 l
<b>Achterwand</b>	Gegalvaniseerd	<b>Boiler volume</b>	4 l

<b>Deur</b>	Dubbelwandig	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Kunststof	<b>Maximale hoogte water afvoer</b>	600 mm
<b>Deur pakking</b>	Alleen boven		

## Technische specificaties


<b>Tank heating element power</b>	2000 W	<b>Maximale water hardheid</b>	12°f - 7°dH
<b>Boiler heating element power</b>	4300 W	<b>Water invoer</b>	Koud 15°C
<b>Washing pump power</b>	290 W	<b>Peristaltische naspoelpomp</b>	Ja, handmatig
<b>Standaard aansluiting</b>	4600 W	<b>Peristaltische naspoelpomp</b>	Ja, handmatig
<b>Electrische aansluiting</b>	2,3 l	<b>Bruikbare ruimte in hoogte</b>	330 mm
<b>Water invoer</b>	Koud 15°C	<b>Diepte open deur</b>	882 mm
<b>Maximale temperatuur water invoer</b>	60°C	<b>Product dimensions WxDxH</b>	440x530x710 mm

## Elektrische aansluiting

<b>Electrische aansluiting</b>	400 V 3N~ / 10 A / 4,6 kW / 50 Hz	<b>Electronische aansluiting</b>	230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 21 A / 4,6 kW / 50 Hz
--------------------------------	-----------------------------------	----------------------------------	---

## Equipments

<b>Peristaltische zeppomp</b>	Ja, elektronisch geregeld	<b>Breaktank</b>	Ja
<b>Peristaltische naspoelpomp</b>	Ja, elektronisch geregeld	<b>Partial renewal of water in the tank and built-in drain pump</b>	Ja
<b>Chemie dosering</b>	gr/lt	<b>Diameter toevoerslang</b>	Ja - 1,5m
<b>Boiler thermostop</b>	Yes - default	<b>Diameter afvoerslang</b>	Ja - 2,2m
<b>Soft Start system</b>	Ja	<b>Peristaltische zeppomp</b>	handmatig
<b>Automatische start</b>	Ja, standaard uitgeschakeld	<b>Peristaltische zeppomp</b>	handmatig
<b>Cycle counter</b>	Ja		

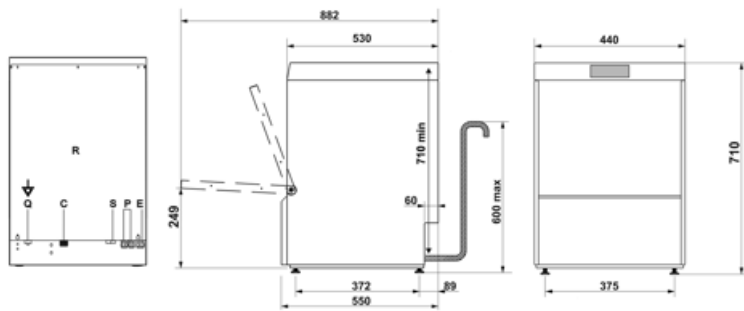

O	MORSETTO EDIVPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

---

## Accessoires niet inbegrepen

---

### KITRB40G01

Kit of 2 wire round baskets and adaptor for Ecoline



### PHOOS01

Polypropylene single basket for cutlery



### PHOOS02

6 compartments polypropylene basket for cutlery

### RB40A3

Adapter for round basket for single wall models and 460 mm glasswashers



### WH00S01

Wire insert for 12 small dishes



### WS4

Underframe for glasswasher 400, 495x530x490 mm

