

UG405DSR

| | |
|-----------------|---------------------------|
| Produktfamilie | Gewerbspülmaschine |
| Unterkategorie | Undercounter glasswashers |
| Korbabmessungen | Ø 400 mm |
| Rinse pump | HTR system |



Serienzubehör

| | | | |
|--|------------|--------------------------------------|-----------|
| Besteckkorb | 1x PHOOS01 | Schlauchlänge - Abwasseranschluss | 2,0 m |
| Universalkorb | 2x RB40G01 | Andere Körbe und Zubehör | 1x RB40A3 |
| Schlauchlänge - Frischwasseranschluss | 1,5 m | | |

Einsatzbereich

| | |
|----------------|--------------|
| Einsatzbereich | Bars/Kaffees |
|----------------|--------------|

Programme

| | |
|-----------------------------------|---|
| Spülprogramme | Tank 60°C/Boiler 85°C - 2'30"; Tank 60°C/Boiler 85°C - 4'00"; Tank 60°C/Boiler 85°C - 1'30" |
| Max. theroretische Korbleistung/h | 40 |

Bedienblende

| | | | |
|-------------------|----|--|----|
| Anzahl der Tasten | 5 | Autodiagnostik-System mit Fehlercodeanzeige | Ja |
| EIN/AUS-Taste | Ja | | |

Konstruktion

| | | | |
|------|--------------------|-------------|-------------|
| Tank | Tiefgezogener Tank | Korbführung | Tiefgezogen |
|------|--------------------|-------------|-------------|

| | | | |
|-------------------------------------|---------------------------------------|---|--------|
| Gehäuse | Einwandig aus Edelstahl nach AISI 304 | Ablaufpumpe mit 3-Stufenfiltersystem und Sedimentsammler | Ja |
| Material Wassertank Rückwand | Edelstahl nach AISI 304 Verzinkt | Kapazität Wassertank | 8 l |
| Laugenfiltration | Kunststoff | Boilervolumen | 4 l |
| Türsteckdichtung | Oben | Spritschutzklasse | IPX4 |
| | | Max. Abflusshöhe | 600 mm |

Technische Eigenschaften


| | | | |
|-------------------------------------|--------|---|----------------|
| Tank heating element power | 2000 W | Max. Wasserhärtegrad | 54°f - 30°dH |
| Boiler heating element power | 4300 W | Min. Wasserzulauftemperatur | 15°C |
| Wash pump power | 290 W | Peristaltischer Klarspülerdosierer | Ja, manuell |
| Anschlusswert | 4600 W | Peristaltischer Klarspülerdosierer | Ja, manuell |
| Water consumption per cycle | 2,3 l | Max. Nutzhöhe | 330 mm |
| Min. Wasserzulauftemperatur | 15°C | Max. Tiefe bei Türöffnung | 882 mm |
| Max. inlet temperature | 60°C | Abmessungen | 440x530x710 mm |

Elektrischer Anschluss

| | | | |
|----------------------|-----------------------------------|--------------------------------------|---|
| Anschlusswert | 400 V 3N~ / 10 A / 4,6 kW / 50 Hz | Alternative Elektroanschlüsse | 230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 21 A / 4,6 kW / 50 Hz |
|----------------------|-----------------------------------|--------------------------------------|---|

Zubehör

| | | | |
|--|---------------------------------------|--|------------------------|
| Peristaltic detergent dispenser | Elektronisch einstell- und entlüftbar | Zykluszähler | Ja |
| Peristaltic rinse-aid dispenser | Elektronisch einstell- und entlüftbar | Break Tank | Ja |
| Einstellbare Dosiermenge an Reiniger/Klarspüler | g/l | Automatisches Teiltankwasserwechselsystem | Ja |
| Permanenter Wasserenthärter, elektronisch einstellbar | Ja | Durchmesser Zulaufschlauch | DN 15 - G ¾" Anschluss |
| Rinse boiler Thermostop system | Yes - default | Durchmesser Ablaufschlauch | DN 20 - G ¾" Anschluss |
| Wash pump soft start system | Ja | Peristaltischer Reinigerdosierer | Ja, manuell |
| Option for auto daily switch on | Zuschaltbar | Peristaltischer Reinigerdosierer | Ja, manuell |

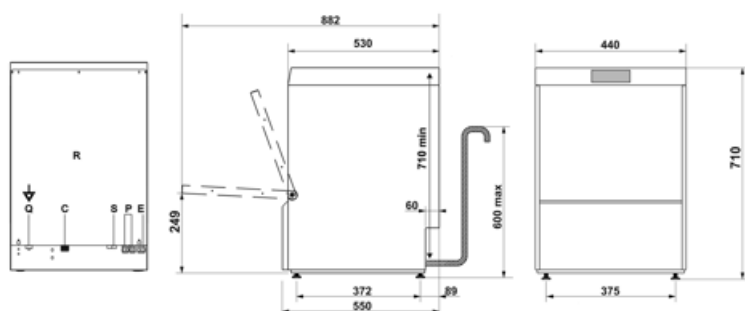

| | |
|---|--|
| O | MORSETTO EDIVPOTENZIALE EARTH TERMINAL |
| E | CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE |
| C | TUBO DI CARICO FILLER HOSE |
| P | TUBI POMPE PERISTALTICHE PERISTALTIC HOSES |
| T | ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT |
| S | TUBO DI SCARICO DRAIN HOSE |
| R | PANNELLO RETRO LOWER BACK PANEL |

Kompatibel Zubehör

KITRB40G01

Kit für 3 Rundkörbe und Adapter für Ecoline



PHOOS02

Besteckkorb, mit 6 Fächern



WH00S01

Einsatz für Tassen mit geneigtem Boden



PHOOS01

Besteckköcher

RB40A3

Adapter für Rundkorb nur für einwandige Modelle 460mm geeignet



WS4

Unterbau für Gläserpüler 400
495x530x490mm



Symbols glossary



HTR-System (Drucksteigerung)



5-Stufen-Filter



Maximale Einschubhöhe 330mm

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Round basket

Versatile solution for bars and cafés

This machine is equipped with a round basket designed to fit perfectly into the sinks of bars, cafés, and bistros, offering maximum versatility for all types of workspaces. Thanks to its compact and functional design, it integrates seamlessly into professional environments, optimising washing operations without compromising efficiency. Ideal for those looking for a practical solution that adapts to varying space requirements.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.