

UG405DSR

| | |
|--------------------------------|---------------------------|
| Familia | Lavavajillas |
| Subfamilia | Undercounter glasswashers |
| Dimensiones de la cesta | Diámetro 400 mm |
| Rinse pump | HTR system |



Equipo accesorios incluidos

| | | | |
|--------------------------------------|------------|----------------------------------|-----------|
| Cesta de cubiertos | PHOOS01 | Tubo de desagüe | Si - 2m |
| Cesta plana | 2x RB40G01 | Otras cestas y accesorios | 1x RB40A3 |
| Tubería de suministro de agua | Si - 1,5m | | |

Distribución

| | |
|-----------------------------|------------------------|
| Usuarios potenciales | Cafeterías - Vinotecas |
|-----------------------------|------------------------|

Programas

| | |
|----------------------------|--|
| Programas | 8- 85°C / 60°C - 2' 30"; 10- 85°C / 60°C - 4'; 5- 85°C / 60°C - 1' 30" |
| Máximo cesto / hora | 40 |

Interface

| | | | |
|--------------------------|----|---------------------------|----|
| Número de botones | 5 | Diagnóstico manual | Sí |
| Botón ON/OFF | Sí | | |

Construcción

| | | | |
|--------------------------------|---------------------------|-----------------------------|------------|
| Cuba | Con base impresa | Guías de estante | En relieve |
| Construcción de la cuba | Mono pared | Bomba de desagüe | Sí |
| Material de la cuba | Acero inoxidable AISI 304 | Capacidad de la cuba | 8 l |

| | | | |
|---------------------------|-------------|-----------------------------|--------|
| Panel trasero | Galvanizado | Volumen del calderín | 4 l |
| Filtro de la cuba | Plástico | Clase de protección | IPX4 |
| Junta de la puerta | Sólo arriba | Profundidad de carga | 600 mm |

Características técnicas


| | | | |
|-------------------------------------|-----------|---|----------------|
| Tank heating element power | 2000 W | Dureza máxima del agua | 54°f - 30°dH |
| Boiler heating element power | 4300 W | Entrada de agua | Frío 15°C |
| Wash pump power | 290 W | Dosificador de detergente peristáltico | Si, manual |
| Conexión por defecto | 4600 W | Dosificador de detergente peristáltico | Si, manual |
| Water consumption per cycle | 2,3 l | Altura útil de carga | 330 mm |
| Entrada de agua | Frío 15°C | Profundidad puerta abierta | 882 mm |
| Max. inlet temperature | 60°C | Product dimensions WxDxH | 440x530x710 mm |

Conexión eléctrica

| | | | |
|---------------------------|----------------------------------|-------------------------------------|---|
| Conexión eléctrica | 400 V 3N~ / 10 A / 4,6 kW /50 Hz | Opción de conexión eléctrica | 230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 21 A / 4,6 kW / 50 Hz |
|---------------------------|----------------------------------|-------------------------------------|---|

Equipamiento

| | | | |
|---|-----------------------------|--|------------|
| Peristaltic detergent dispenser | Si, control electrónico | Contador de ciclos | Sí |
| Peristaltic rinse-aid dispenser | Si, control electrónico | Tanque de rotura | Sí |
| Dosificación de productos químicos | gr/lt | Renovación parcial del agua en el tanque e incorporación bomba de drenaje | Sí |
| Descalcificador incorporado | Sí | Diámetro del tubo de entrada de agua | Si - 1,5m |
| Rinse boiler Thermostop system | Yes - default | Diámetro del tubo de desagüe | Si - 2m |
| Wash pump soft start system | Sí | Dosificador de detergente peristáltico | Si, manual |
| Option for auto daily switch on | Si, por defecto desactivado | Dosificador de detergente peristáltico | Si, manual |

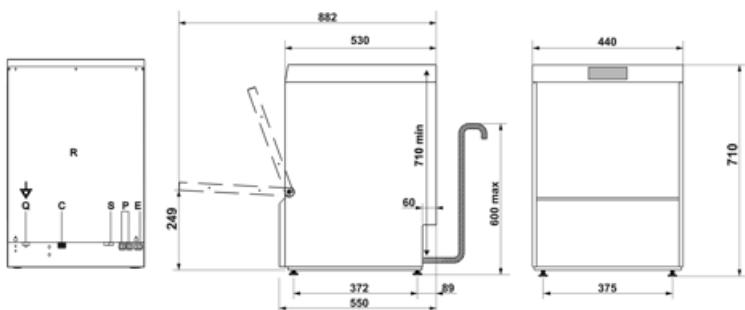

| | |
|---|--|
| O | MORSETTO EQUIVOLONTIALE EARTH TERMINAL |
| E | CAVO DI ALIMENTAZIONE ELETTRICA POWER CABLE |
| C | TUBO DI CARICO FILLER HOSE |
| P | TUBI POMPE PERISTALTICHE PERISTALTIC HOSES |
| T | ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT |
| S | TUBO DI SCARICO DRAIN HOSE |
| R | PANNELLO RETRO LOWER BACK PANEL |

Accesories Compatible

KITRB40G01

Kit of 2 wire round baskets and adaptor
for Ecoline



PHOOS01



PHOOS02



WH00S01



RB40A3



Adapter for round basket for single
wall models



WS4

Estructura inferior para lavavasos
400, 495x530x490 mm

Symbols glossary



HTR RINSING SYSTEM



5 STAGE FILTER



MAX.USABLE HEIGHT 330mm

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Round basket

Versatile solution for bars and cafés

This machine is equipped with a round basket designed to fit perfectly into the sinks of bars, cafés, and bistros, offering maximum versatility for all types of workspaces. Thanks to its compact and functional design, it integrates seamlessly into professional environments, optimising washing operations without compromising efficiency. Ideal for those looking for a practical solution that adapts to varying space requirements.



Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.