

# UG405DUK

Product Family	Dishwasher
Subfamily	Undercounter glasswasher
Basket dimensions	400x400 mm
Panel	Ecoline 2016
Filter	4-stages filter system
Rinse pump with H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	330 mm
Default power supply	230 V~ / 12 A / 2,6 kW / 50 Hz
Depth with door open	882 mm
Dimensions	440x530x710 mm



## Target

Potential users	Bars/Cafes
-----------------	------------

## Aesthetics

Series	Ecoline	Control Panel	Electronic
--------	---------	---------------	------------

## Functions



Functions	5-stage filter; HTR; Door clearance 330mm
-----------	---

## Programmes

Programs	3 automatic programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C-4'
Drain and self cleaning cycle	Yes
Maximum baskets/hour	40

## Interface

Number of buttons	5	Manual diagnostics	Yes
-------------------	---	--------------------	-----

On/off indicator Yes

## Construction

Tank Construction	With printed base Single skinned	Rinse arm	Plastic
Tank material	Stainless steel AISI 304	Door gasket	Top only
Back panel	Galvanized	Rack guides	Embossed
Door	Double skinned	Wash tank capacity	8 l
Counter balanced door	Yes	Boiler capacity	4 l
Tank filter	Plastic	Protection class	IPX4
Wash arm	Stainless steel AISI 304	Net weight (kg)	40,000 kg
		Drain max. height	600 mm

## Technical Features

Tank heating element	2000 W	Warm water connection	Cold 15°C
Boiler heating element	2300 W	Inlet water maximum temperature	60°C
Wash pump	290 W	Max water hardness	12°F - 7°dH
Default connection	2600 W	Water inlet pressure	1-6 bar / 100-600 kPa
Water consumption per cycle	2,3 l		

## Electrical Connection


Plug Not present

## Equipment

Drain pump	Yes	Detergent flow rate	1.5 l/h
Peristaltic detergent pump	Yes, electronic control	Rinse aid flow rate	0.4 l/h
Peristaltic rinse aid pump	Yes, electronic control	Cycle counter	Yes
Chemical dosing	gr/lt	Break tank	Yes
Boiler thermostop	Yes	Partial water exchange in the wash tank via built-in drain pump	Yes
Soft Start	Yes	Water supply pipe diameter	16 mm
Automatic start	Yes	Drain supply pipe diameter	21.5 mm

## Accessories Included

Cutlery basket	PHOOS01	Water supply pipe	Yes - 1.5m
Flat basket	2x PB40G01	Drain pipe	Yes - 2m

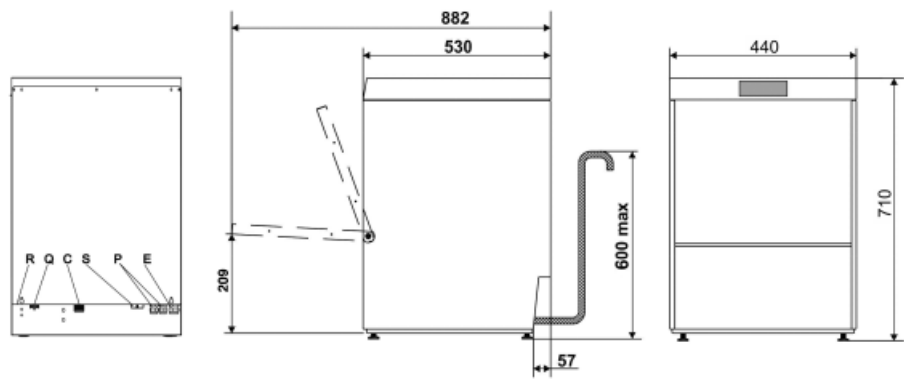

O	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

## Symbols glossary

---



HTR rinsing system



5 STAGE FILTER



MAX.USABLE HEIGHT 330mm