

UG425D

Familie	Afwasmachine
Subfamilie	Undercounter glasswashers
Korf afmetingen	400x400 mm
Rinse pump	HTR system
Washing pump	Standard



Meegeleverde accessoires

Glazen korf	WB40G02	Toevoerslang	Ja - 1,5m
Bestek mand	PHOOS01	Afvoerpijp	Ja - 2,2m
Vlakke korf	WB40G01		

Target

Solutions	Coffee shops/Wine bars; Restaurants/Pubs
-----------	---

Programs

Programs	8 automatic programs; 1 fully customizable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	19- 24°C / 60°C - 4'; 1- 71 ° C / 60 ° C - 50"; 2- 71°C / 60°C - 60"; 12- 71°C / 60°C - 1' 10"; 13- 71°C / 60°C - 2' 10"; 18- 85°C / 60°C - 1' 10"; 7- 85°C / 60°C - 2'; 10- 85°C / 60°C - 4'
Max korven/uur	72
Maximale vaat/uur	1152
Maximale glazen/uur	960

Interface

Display	TFT	Melding, geen zeep	Ja
Aantal knoppen	5		

Aan/uit knop	Ja	Programma verloop melding	Ja
Naglans spoelmiddel leeg melding	Ja	Einde-cyclus melding	Ja
		Handmatige diagnose	Ja

Construction

Tank Construction	Deep drawn Double wall	Korf geleiders	Reliëf
Tank materiaal	Roestvrij staal AISA 304	Hood elevation system	Manual
Achterwand	Gegalvaniseerd	Filter	5-stages filter system
Deur	Dubbelwandig	Tank volume	7 l
Gebalanceerde deur	Ja	Boiler volume	4 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Noise	Lpa 56 dBA
Lower washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	Roestvrij staal	Adjustable feet	Ja
Deur pakking	Aan 3 zijden	Maximale hoogte water afvoer	600 mm

Technische specificaties

Tank heating element power	2000 W	Water invoer	Koud 15°C
Boiler heating element power	4500 W	Peristaltische naspoelpomp	Ja, handmatig
Washing pump power	290 W	Peristaltische naspoelpomp	Ja, handmatig
Standaard aansluiting	4800 W	Bruikbare ruimte in hoogte	315 mm
Electrische aansluiting	2,3 l	Diepte open deur	930 mm
Water invoer	5°C	Maximale diameter vaat	300 mm
Maximale temperatuur water invoer	60°C	Maximale glas hoogte	300 mm
Maximale water hardheid	12°f - 7°dH	Product dimensions WxDxH	460x600x705 mm


Elektrische aansluiting

Electrische aansluiting	400 V 3N~ / 10 A / 4,8 kW / 50 Hz	Electronische aansluiting	230 V 3~ / 13 A / 4,8 kW / 50 Hz; 230 V~ / 11 A / 2,5 kW / 50 Hz; 230 V~ / 10 A / 2,3 kW / 50 Hz; 230 V~ / 15 A / 3,3 kW / 50 Hz; 230 V~ / 21 A / 4,8 kW / 50 Hz
-------------------------	-----------------------------------	---------------------------	--

Equipments

Afvoerpomp	Ja	Automatische start	Ja, standaard uitgeschakeld
Peristaltische zeppomp	Ja, elektronisch geregeld		

Peristaltische naspoelpomp	Ja, elektronisch geregeld	Breaktank	Ja
Chemie niveau probe	Ja, optioneel KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Ja
Boiler thermostop	Yes - default	Diameter toevoerslang	DN10 - 3/8"
Tank thermostop	Yes	Diameter afvoerslang	Ja - 2,2m
Soft Start system	Ja	Peristaltische zeppomp	handmatig
Stand-by system	Ja	Peristaltische zeppomp	handmatig

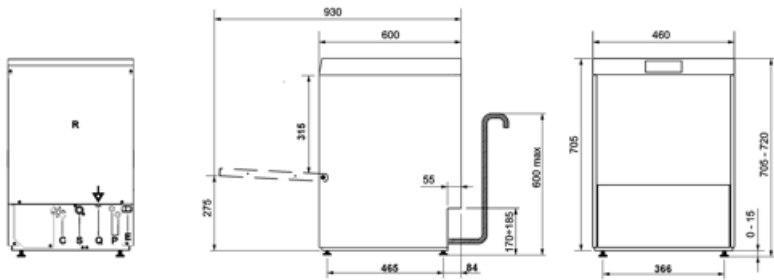

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Accessoires niet inbegrepen



KITDETKCC400

Kit for detergent (1l) and rinse aid (1l) storage for glasswasher 400 double wall



PHOGR4

Glass basket for 400x400 glasswashers



PHOOS02

6 compartments polypropylene basket for cutlery



RB40A3

Adapter for round basket for single wall models and 460 mm glasswashers



WB40D01

Wire basket for 16 dishes max diameter 315 mm, 400x400 mm



WB40G02

Sloped bottom 4 compartments wire basket for max 90 mm diameter glasses, 400x400x168 mm



WB40PG4

Wire basket for plastic glasses with flat bottom, 400x400x210 mm



WS4

Underframe for glasswasher 400, 495x530x490 mm



KITSONLIV

Probe level kit for double wall models



PHOOS01

Polypropylene single basket for cutlery



RB40A2

Adapter for round basket for double wall models



RB40G01

Universal wire basket with flat bottom, Ø 400 mm, h 140 mm



WB40G01

Universal wire basket with flat bottom, 400x400x120 mm

WB40G03

Sloped bottom 3 compartments wire basket for max 120 mm diameter glasses, 400x400x168 mm



WH00S01

Wire insert for 12 small dishes