

UG515DSL-1

Family	Professional dishwasher
Subfamily	Undercounter Glasswasher
Basket dimensions	500x500 mm
Panel	Easyline
Filter	5-stages filter system
Rinse pump H.T.R. system	Yes
Usable load height	300 mm
Power connection	400 V 3N~ / 12 A / 6,7 kW / 50 Hz
Depth with open door	925 mm
Maximum dishes diameter	300 mm
Product dimensions WxDxH	600x600x722 mm



Target

Solutions	Coffee shops/Wine bars
-----------	------------------------

Aesthetics

Series	Easyline	Led color	Green
Control panel	electronic		

Functions



Functionality	5-stage filter; HTR; Door clearance 300mm
---------------	---

Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 71°C/Tank 60°C - 1'20"; Boiler 85°C/Tank 60°C - 1'10"; Boiler 85°C/Tank 60°C - 1'30"; Boiler 85°C/Tank 60°C - 2'; Boiler 85°C/Tank 60°C - 3'; Boiler 71°C/Tank 60°C - 2'10"; Boiler 85°C/Tank 60°C - 4'10"
Drain and self cleaning cycle	Yes
Maximum basket/hour	51
Maximum dishes/hour	1080

Interface

Display	8 digit	Detergent missing alert	Yes
Number of buttons	5	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Salt alert	Yes	Manual diagnostic	Yes
Rinse aid missing alert	Yes		

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Construction	Double wall	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6.5 l
Door	Double wall	Noise	Lpa 56,5 dBA
Balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	2 in stainless steel	Net weight	59.000 kg
Rinse spray arm	2 in stainless steel	Drain max. height	600 mm

Technical Features

Tank heating element	2000 W	Warm water connection	8°C
Boiler heating element	6000 W	Max temperature inlet water	60°C
Washing pump	290 W		
Default connection	4800 W	Max water hardness	54°F - 30°dH
Water cycle consumption	3,2 l	Inlet pressure	100-600 kPa

Electrical Connection

Plug	Not present	Optional electrical connection	230 V 3~ / 21 A / 7,3 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz (NC); 230 V~ / 20 A / 4,5 kW / 50 Hz (NC); 230 V~ / 22 A / 5,0 kW / 50 Hz
------	-------------	--------------------------------	--


Equipments

Drain pump	Yes	Detergent load	1,5 l/h
Peristaltic detergent doser	Electronic control	Rinse load	0,4 l/h
Peristaltic rinse-aid doser	Electronic control	Cycle counter	Yes
		Partial renewal of water in the tank and built-in drain pump	Yes

Automatic incorporated softener	Yes	Water supply pipe diameter	DN15 - ½"
Thermostop system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Soft Start system	Yes	Detergent (red) hose lenght	2,2m
Stand-by system	Yes	Rinse aid (blue) hose lenght	2,2m
Automatic start	Yes, default OFF		

Accessories Included

Flat basket	1x WB50G02	Drain hose	Yes - 2m
Water supply hose	Yes - 1,5m		

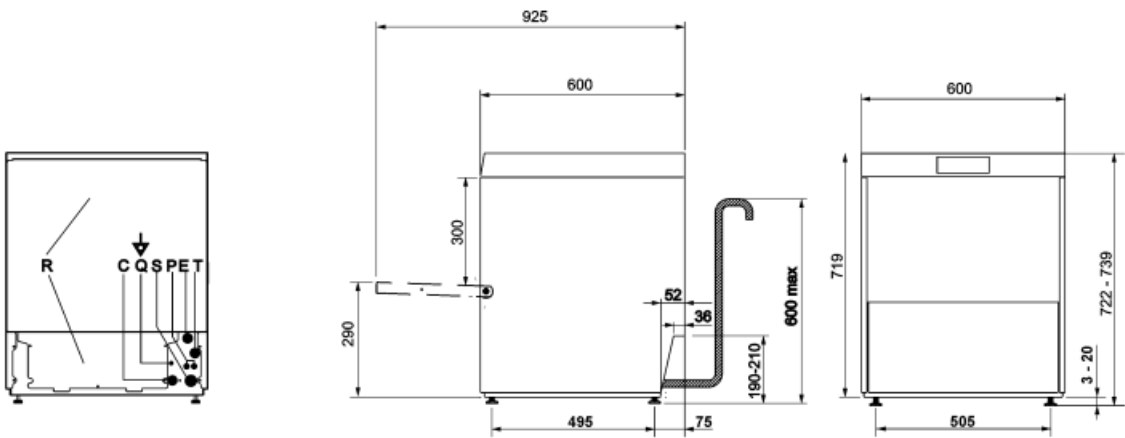

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories

WB50PG5

Wire basket for no. 25 plastic glasses with flat bottom, 500x500x260 mm


WH00S01

Wire insert for 12 small dishes



PB50D01

Polypylene basket for 18 plates, 500x500x105 mm



WS5

Underframe for glasswahsers 500mm



KITSONLIV

Probe level kit for double wall models



PHOOS01

Polypropylene single basket for cutlery



PHOOS02

6 compartments polypropylene basket for cutlery



Symbols glossary (TT)



HTR RINSING SYSTEM



MAX. LOAD HEIGHT 300mm



5 STAGE FILTER