UKU8C082DE



Product Family	Refrigerator
Installation	Built-in
Category	Under counter
Built-in niche	82 - 87
Reference width	Until 60 cm
Reference height	Until 100 cm
Cooling type	Static
Defrost	Manual
Hinge type	Door on door
Hinge position	Right
Reversible door	Yes
EAN code	8017709337018

Aesthetics

Aesthetic	Universale	**Side material**	Steel
Colour	White	**Side colour**	White
Design	Flat	**Logo**	Silk screen
Material	Metal sheet	**Display**	LED
Handle type	Fixed	**Display position**	Interno (cella frigo)
Logo colour	Black		

Refrigerator compartment features

Number of compartments	1	**Crisper Cover**	Yes
Compartment types	Fruit and vegetable compartment	**Type of crisper/vegetable drawers cover**	Glass
No. of adjustable shelves	2	**No. of lights refrigerator compartment**	1
Number of fruit and vegetables drawers	1	**Internal light in fridge**	Yes
Shelves material	Glass	**Type of internal light (fridge)**	LED
Type of crisper/vegetable drawers cover	Standard		

Refrigerator Inner Door

		No. of bottle shelves	1

No. of door shelves with transparent cover	1	**Bottle shelves with wire support**	Yes
Adjustable door shelves with wire support	Yes		

Other Refrigerator features

Accessories	Egg tray

Freezer compartment features

Internal freezer compartment	Yes

Other technical features

Type of temperature control	Electronic
No. of compressors	1
Refrigerant gas type	R600a
Refrigerant Quantity (g)	32 g
Max weight door panel (fridge)	31 kg
Foam agent	Cyclopentane

Performance / Energy Label - Reg. 2019




Annual energy consumption	148 kWh/a	**Airborne acoustical noise emissions**	38 dB(A) re 1 pW
Energy efficiency class	E	**Temperature Rise Time**	8,20 h
Airborne acoustical noise emission class	C	**4 star - Freezing capacity**	3,1 kg/24h
Total net volume	110 l	**Climate class**	SN, N, ST, T
Sum of the volumes of the frozen compartment(s)	16 l	**EEI**	100 %
Sum of the volumes of the chill compartment(s) and the unfrozen compartment(s)	94 l		

Electrical Connection

Electrical connection rating	110 W	**Frequency (Hz)**	50 Hz
Current	0,9 A	**Power supply cable length**	240 cm
Voltage (V)	230-240 V	**Plug**	(G) UK e Singapore

Logistic Information

Width	596 mm	**Height**	819 mm
Width of the built-in niche	600 mm	**Height of the built-in niche**	820 mm
Depth without handle	547 mm	**Product width with maximum doors opening**	777 mm
Depth of the built-in niche	550 mm		

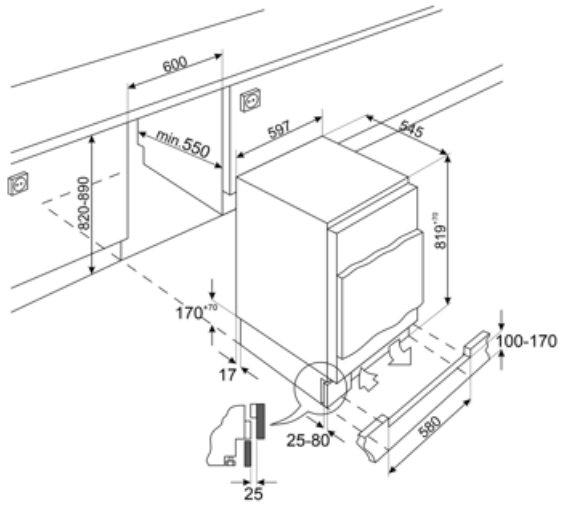

Symbols glossary



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



LED interior lighting: is a more energy efficient and long lasting way of illuminating the interior of the appliance.



Built-in niche



Energy efficiency class E