

# UW5757D

Product Family	Dishwasher
Subfamily	Utensil dishwasher
Line	Utensil washer
Basket dimensions	570x570 mm
Rinse pump	HTR system
Wash pump	Standard
Default power supply	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz



## Accessories Included

Cutlery basket	1 x WH00S02	Water supply pipe	Yes - 2,5m
Flat basket	WB5757G01	Drain pipe	Yes - 2m

## Target

Potential users	Hotels; Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools; QSR
-----------------	--

## Programmes

Program table	Utensil washer
Utensil washer programs	1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
Maximum baskets/hour	30

## Interface

Display	4 digit	On/off indicator	Yes
Number of buttons	3		

## Construction

<b>Tank</b>	With printed base	<b>Rack guides</b>	Welded
<b>Construction</b>	Single skinned	<b>Filter</b>	2-stages filter system
<b>Tank material</b>	Stainless steel AISI 304	<b>Wash tank capacity</b>	36 l
<b>Back panel</b>	Galvanized	<b>Boiler capacity</b>	12 l
<b>Upper washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Lower washing system</b>	A 3-arms washing and one split rinse spray arms, stainless steel	<b>Adjustable feet</b>	Yes
<b>Tank filter</b>	Stainless steel	<b>Drain max. height</b>	800 mm

## Technical Features

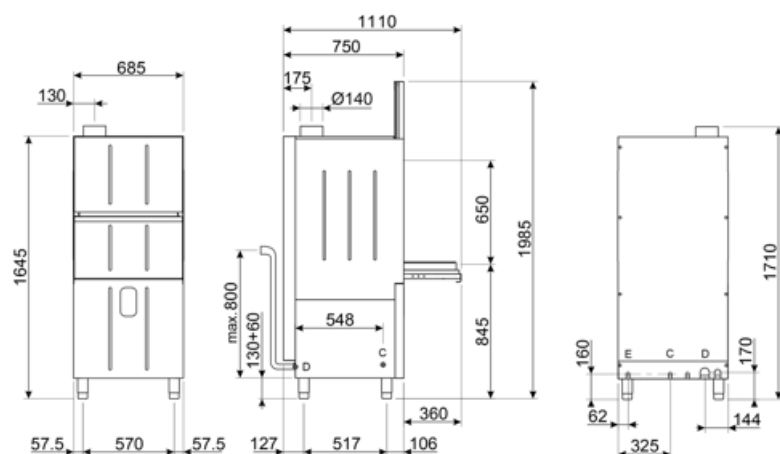
<b>Trays washing option</b>	Yes	<b>Rinse aid flow rate</b>	0.4 l/h
<b>Water consumption per cycle</b>	5 l	<b>Usable load height</b>	650 mm
<b>Minimum water consumption per cycle</b>	1,8 l	<b>Height with door open</b>	1985 mm
<b>Warm water connection</b>	8°C	<b>Depth with door open</b>	1110 mm
<b>Max. inlet temperature</b>	60°C	<b>Maximum height with no-basket washing</b>	650 mm
<b>Max water hardness</b>	12°F - 7°dH	<b>Dimensions</b>	685x750x1710 mm
<b>Detergent flow rate</b>	1.5 l/h		

## Electrical Connection

<b>Tank heating element power</b>	4500 W	<b>Default connection</b>	9000 W
<b>Boiler heating element power</b>	7500 W	<b>Electrical connection options</b>	230 V 3~ / 39,5 A / 9,0 kW / 50 Hz
<b>UW wash pump power</b>	1600W		

## Equipment

<b>Peristaltic detergent dispenser</b>	Yes, manual	<b>Water supply pipe diameter</b>	16 mm
<b>Peristaltic rinse-aid dispenser</b>	Yes, manual	<b>Drain supply pipe diameter</b>	21.5 mm
<b>Rinse boiler Thermostop system</b>	Yes - default	<b>Detergent (red) hose length</b>	Yes, manual
<b>Wash pump soft start system</b>	Yes	<b>Rinse aid (blue) hose length</b>	Yes, manual
<b>Break tank</b>	Yes		




D = SCARICO 1 1/2", VIDANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DESAGÉE 1 1/2", CIBB 1 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАПОР ВОДЫ 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ÉLECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

## Compatible Accessories

---

**WB5757G01**

Universal basket with flat bottom for  
utensilwasher

**WB5757T01**


Stainless steel basket for 5  
utensilwasher trays

**WB5757T02**

Stainless steel basket for 8  
utensilwasher trays

**WH00B02**

Block for utensilwasher saccapoe

**WH00S02**

Basket for utensilwasher tools

## Symbols glossary

---



SUITABLE FOR EURONORM TRAY



Suitable for 1/1GN trays



HTR rinsing system



...

---

## Benefit

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.