

UW5757D

Product Family Subfamily Type

Crockery

Basket dimensions Rinse pump Wash pump Default power supply Dishwasher Utensilwasher Utensil dishwasher

Crockery; Cutlery; EN 600x400 trays;

GN1/1 trays; Utensils

570x570 mm HTR system Standard

400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz



Target

Industries Hotels; Ristoranti /

Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities; Commercial food services; Grocery shops /

Food retail

Aesthetics

Led colour Red

Technical Features

Trays washing option Yes Water consumption per 51

cycle

Wash temperature 60 °C

(min-max)

Rinse temperature (min- 78°C

max)

Minimum water 1,8 l

consumption per cycle

Warm water connection 8°C
Max. inlet temperature 60°C

Max water hardness 12°f - 7°dH

Detergent flow rate
Rinse aid flow rate
Usable load height
Height with door open
Depth with door open
Maximum height with
no-basket washing

1.5 l/h 0.4 l/h 650 mm 1985 mm 1110 mm 650 mm

Dimensions 685x750x1710 mm

SMEG SPA 18/10/2025



Programmes

Program table

Utensil washer programs

Maximum baskets/hour

Utensil washer

1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless

at 60°C - 10" dripping pause - rinse 18" at 85°C

30

Electrical Connection

Tank heating element

power

Boiler heating element

power

UW wash pump power

4500 W

7500 W

1600W

Default connection

Electrical connection

options

9000 W

230 V 3~ / 39,5 A / 9,0 kW /

50 Hz

Interface

Display

Number of buttons

4 digit

On/off indicator

Yes

Construction

Tank

Construction

Tank material

Back panel

Upper washing system

Lower washing system

Tank filter

Rack guides

With printed base

Single skinned

Stainless steel AISI 304

Galvanized

One washing and one split

rinse spray arms, stainless

A 3-arms washing and one

split rinse spray arms,

stainless steel

Stainless steel Welded

Filter

Wash tank capacity **Boiler** capacity

Boiler type Noise level

Protection class Adjustable feet Drain max. height 2-stages filter system

36 I 12 I

Artmosferic boiler Lpa 51,7 dBA

IPX4 Yes 800 mm

Accessories Included

Cutlery basket

Flat basket

1 x WH00S02 WB5757G01

Water supply pipe

Drain pipe

Yes - 2,5m Yes - 2m

Equipment

Peristaltic detergent

dispenser

Yes, manual

Water supply pipe

diameter

16 mm

SMEG SPA 18/10/2025



Peristaltic rinse-aid

Yes, manual

dispenser

Rinse boiler Thermostop Yes - default

system

Wash pump soft start

system

Break tank Yes Drain supply pipe

diameter

Detergent (red) hose

length

Rinse aid (blue) hose

length

21.5 mm

Yes, manual

Yes, manual


Logistic Information

Packed width 860 mm Packaged depth 820 mm Height (mm) packed 1910 mm Dimensions of the packed product (mm)

Net weight (kg) Gross weight (kg)

1910x860x820

135.000 kg 161.000 kg

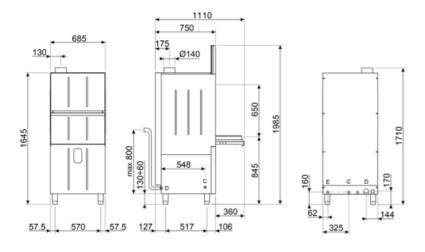

D - SCARICO 10°, VEDANGE 10°, DEAN 110°, ABFLUSS 110°, DEAGGE 10°, CHIB 110°
C - CARICAMENTO ACQUA S' GAS, CICAGOEMENT RAD S' GAZ, WATER NELETS' GAS, ZUTLES S' GAS, CARIGA ANDA S' GAS, BAROP BOUM S' GAS
E - ALLACCIAMENTO ELETTRICO, BRANCIERISM'EL LICERROPE, ELECTROCONSTICTORS, ELECTRICA, SOCIEDADO ELECTRICA, SIREPHPHI CINOC BOURGE

SMEG SPA 18/10/2025



Compatible Accessories



WB5757G01

Universal basket with flat bottom for utensilwasher



WB5757T01

Stainless steel basket for 5 utensilwasher trays



WB5757T02

Stainless steel basket for 8 utensilwasher trays



WH00B02

Block for utensilwasher saccapoche



WH00S02

Basket for utensilwasher tools

SMEG SPA 18/10/2025



Symbols glossary

SUITABLE FOR EURONORM TRAY



GN1/1 Suitable for 1/1GN trays



HTR rinsing system



SMEG SPA 18/10/2025



Benefit

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

SMEG SPA 18/10/2025