

UW5757D

Product Family	Dishwasher
Subfamily	Utensilwasher
Type	Utensil dishwasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
Basket dimensions	570x570 mm
Rinse pump	HTR system
Boiler type	Atmosferic boiler
Wash pump	Standard
Default power supply	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz
Dimensions	685x750x1710 mm



Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	---

Aesthetics

Led colour	Red
-------------------	-----

Technical Features

Trays washing option	Yes	Detergent flow rate	1.5 l/h
Water consumption per cycle	5 l	Rinse aid flow rate	0.4 l/h
Wash temperature (min-max)	60 °C	Usable load height	650 mm
Rinse temperature (min-max)	78°C	Height with door open	1985 mm
Min. water connection temperature	8°C	Depth with door open	1110 mm
Max. inlet temperature	60°C	Maximum height with no-basket washing	650 mm
Max water hardness	8°f-5dh / 14°f-8dh		

Programmes

Program table	Utensil washer
Utensil washer programs	1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
Maximum baskets/hour	30

Electrical Connection

Tank heating element power	4500 W	Default connection	9000 W
Boiler heating element power	7500 W	Electrical connection options	230 V 3~ / 39,5 A / 9,0 kW / 50 Hz
UW wash pump power	1600W	Plug	No

Interface

Display	4 digit	On/off indicator	Yes
Number of buttons	3		

Construction

Tank Construction	With printed base	Filter	2-stages filter system
Tank material	Single skinned	Wash tank capacity	36 l
Back panel	Stainless steel AISI 304	Boiler capacity	12 l
Upper washing system	Galvanized	Noise level	Lpa 51,7 dBA
Lower washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	A 3-arms washing and one split rinse spray arms, stainless steel	Adjustable feet	Yes
Rack guides	Stainless steel	Drain max. height	800 mm
	Welded		

Accessories Included

Flat basket	WB5757G01	Drain pipe	Yes - 2m
Water supply pipe	Yes - 2,5m		


Equipment

Peristaltic detergent dispenser	Yes, manual	Water supply pipe diameter	DN15 - ½"
--	-------------	-----------------------------------	-----------

Peristaltic rinse-aid dispenser	Yes, manual	Drain supply pipe diameter	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose length	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose length	2,2 m
Break tank	Yes		

Logistic Information

EAN code	8017709207946	Net weight (kg)	135,000 kg
Packed product dimensions (WxDxH)	860x820x1910 mm	Gross weight (kg)	161,000 kg

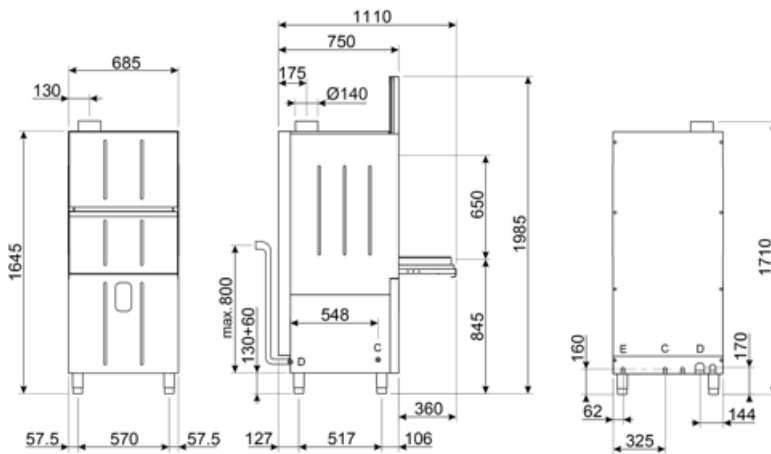

D = SCARICO 1 1/2", VIDANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DESAGÉE 1 1/2", CIBB 1 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLOSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАПОР БОДЫ 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Compatible Accessories



WB5757G01

Universal basket with flat bottom for
utensilwasher



WB5757T01

Stainless steel basket for 5
utensilwasher trays




WB5757T02

Stainless steel basket for 8
utensilwasher trays



WH00B02

Block for utensilwasher saccapoche



WH00S02

Basket for utensilwasher tools

Benefit

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.