

# UW5757DPS

<b>Product Family</b>	Dishwasher
<b>Subfamily</b>	Utensilwasher
<b>Type</b>	Utensil dishwasher
<b>Crockery</b>	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays; Utensils
<b>Basket dimensions</b>	570x570 mm
<b>Standard drain pump with partial water renewal in the wash tank</b>	Yes
<b>Rinse pump</b>	HTR system
<b>Boiler type</b>	Atmosferic boiler
<b>Wash pump</b>	Standard
<b>Default power supply</b>	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz
<b>Dimensions</b>	685x750x1710 mm



## Target

<b>Industries</b>	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	--

## Aesthetics

<b>Led colour</b>	Red
-------------------	-----

## Technical Features

<b>Trays washing option</b>	Yes	<b>Detergent flow rate</b>	1.5 l/h
<b>Water consumption per cycle</b>	5 l	<b>Rinse aid flow rate</b>	0.4 l/h
<b>Wash temperature (min-max)</b>	60 °C	<b>Usable load height</b>	650 mm
<b>Rinse temperature (min-max)</b>	78°C	<b>Height with door open</b>	1985 mm
<b>Min. water connection temperature</b>	8°C	<b>Depth with door open</b>	1110 mm
<b>Max. inlet temperature</b>	60°C	<b>Maximum height with no-basket washing</b>	650 mm
<b>Max water hardness</b>	8°f-5dh / 14°f-8dh		

## Programmes

<b>Program table</b>	Utensil washer
<b>Utensil washer programs</b>	1- 120" (92" at 60°C - rinse 18" at 85°C); 2- 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); 3- Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
<b>Maximum baskets/hour</b>	30

## Electrical Connection

<b>Tank heating element power</b>	4500 W	<b>Default connection</b>	9000 W
<b>Boiler heating element power</b>	7500 W	<b>Electrical connection options</b>	230 V 3~ / 39,5 A / 9,0 kW / 50 Hz
<b>UW wash pump power</b>	1600W	<b>Plug</b>	No

## Interface

<b>Display</b>	4 digit	<b>On/off indicator</b>	Yes
<b>Number of buttons</b>	3		

## Construction

<b>Tank Construction</b>	With printed base Single skinned	<b>Filter</b>	2-stages filter system
<b>Tank material</b>	Stainless steel AISI 304	<b>Wash tank capacity</b>	36 l
<b>Back panel</b>	Galvanized	<b>Boiler capacity</b>	12 l
<b>Upper washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Noise level</b>	Lpa 51,7 dBA
<b>Lower washing system</b>	A 3-arms washing and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Stainless steel	<b>Adjustable feet</b>	Yes
<b>Rack guides</b>	Welded	<b>Drain max. height</b>	800 mm

## Accessories Included

<b>Flat basket</b>	WB5757G01	<b>Drain pipe</b>	Yes - 2m
<b>Water supply pipe</b>	Yes - 2,5m		


## Equipment

<b>Peristaltic detergent dispenser</b>	Yes, manual	<b>Water supply pipe diameter</b>	DN15 - ½"
--	-------------	-----------------------------------	-----------

Peristaltic rinse-aid dispenser	Yes, manual	Drain supply pipe diameter	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose length	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose length	2,2 m
Break tank	Yes		

## Logistic Information

EAN code	8017709276683	Net weight (kg)	135,000 kg
Packed product dimensions (WxDxH)	860x820x1910 mm	Gross weight (kg)	161,000 kg

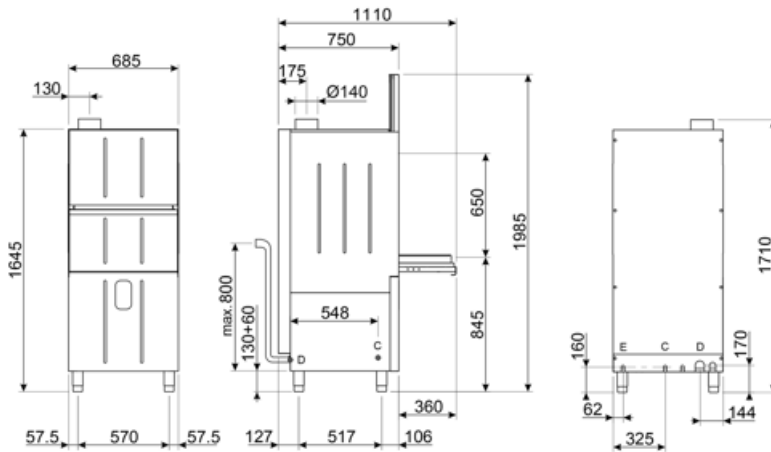

D = SCARICO 1 1/2", VIDANGE 1 1/2", DRAIN 1 1/2", ABFLUSS 1 1/2", DESAGÉE 1 1/2", CИВБ 1 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLOSS 1/2" GAS, CARGA AGUA 1/2" GAS, НАПОР БОДЫ 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

---

## Compatible Accessories

---



**WB5757G01**

Universal basket with flat bottom for  
utensilwasher



**WB5757T01**

Stainless steel basket for 5  
utensilwasher trays




**WB5757T02**

Stainless steel basket for 8  
utensilwasher trays



**WH00B02**

Block for utensilwasher saccapoché



**WH00S02**

Basket for utensilwasher tools

---

## Benefit

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity.

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics, with double-skin construction

The split, balanced doors are designed to ensure maximum ergonomics during the loading and unloading of utensils, making the process easier and minimising operator effort. Furthermore, the double-skin construction not only provides a robust structure but also ensures excellent thermal and acoustic insulation, helping to maintain a consistent internal temperature and reduce noise levels during operation, further enhancing the user experience.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.